

Certified, Filed and or Recorded on
Sep. 22, 2009 AT 12:17PM


Signed: BW
MARILYN J NOVAK G V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER
Fee Amount: \$46.00

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 4, Township 36, Range 29
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 09-10-09 found a Iron pipe with RLS cap number 10918 on fence line.
DATE
- left monument as found lowered monument removed monument (explain)
- On _____ placed a _____
DATE

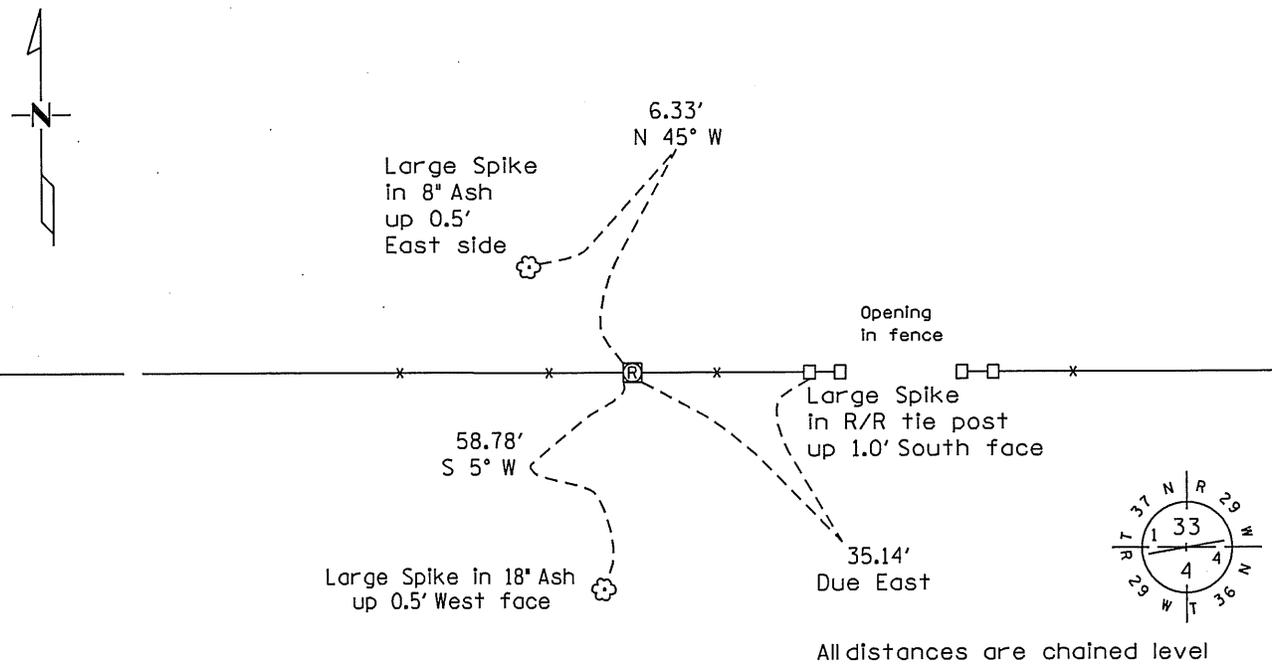

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

Signature Kevin J. Metz Date 9-16-2009 License No. 40343
 Title: Land Surveyor Professional Engineer County Surveyor County Engineer
MNDOT

Statement of Evidence:**North Quarter Corner of Section 4, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.**

1849 Theodore Conkey ran the original public survey and set a wood post at this location and bearing trees were recorded.

10" Elm	N 18 E	33 links
14" Elm	S 7 E	15 links

1940's MN/DOT alignment map for TH 23 shows the North Quarter Corner in east-west fence line 1318.2 feet south of the centerline.

2003 No resurvey information was found on this corner in the Benton County records. Westwood Professional Services, Inc. found an iron pipe with cap RLS No. 10918, Sidney Williamson. It appears the iron pipe was set midway between section corners.

County Coordinates obtained by GPS (for reference only)
 NAD 83 (1996 Adjustment)
 N- 132250.581
 E- 523781.034

2004 On June 24th, 2004, The Minnesota Department of Transportation found an iron pipe with a RLS No. 10918. An area was searched approximately 8.4 feet west of the in-place iron using Minnesota Department of Transportation computations of records from 1940's that would place the monument at that location. Nothing was found. The distance on the east-west fence line is measured to be 1321.06 feet south of the centerline. Reference ties were established.

County Coordinates obtained by GPS (for reference only)
 NAD 83 (1996 Adjustment)
 N-132250.5610
 E-523780.8420

2009 On September 10th, 2009, The Minnesota Department of Transportation found an iron pipe with RLS No. 10918. Reference Ties were verified as shown on the front of this document. The Minnesota Department of Transportation accepts the iron pipe with RLS No. 10918 as the correct location of the North Quarter Corner of Section 4.

For details and survey analysis, contact the Minnesota Department of Transportation District Surveys Office in Baxter, Minnesota.