

Certified, Filed and or Recorded on
Dec. 16, 2008 AT 01:47PM


Signed: BW
MARILYN J NOVAK 6 11
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 10, Township 36N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/14/08 found a 1/2" IRON PIPE CAP #12236 DOWN 0.25'
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

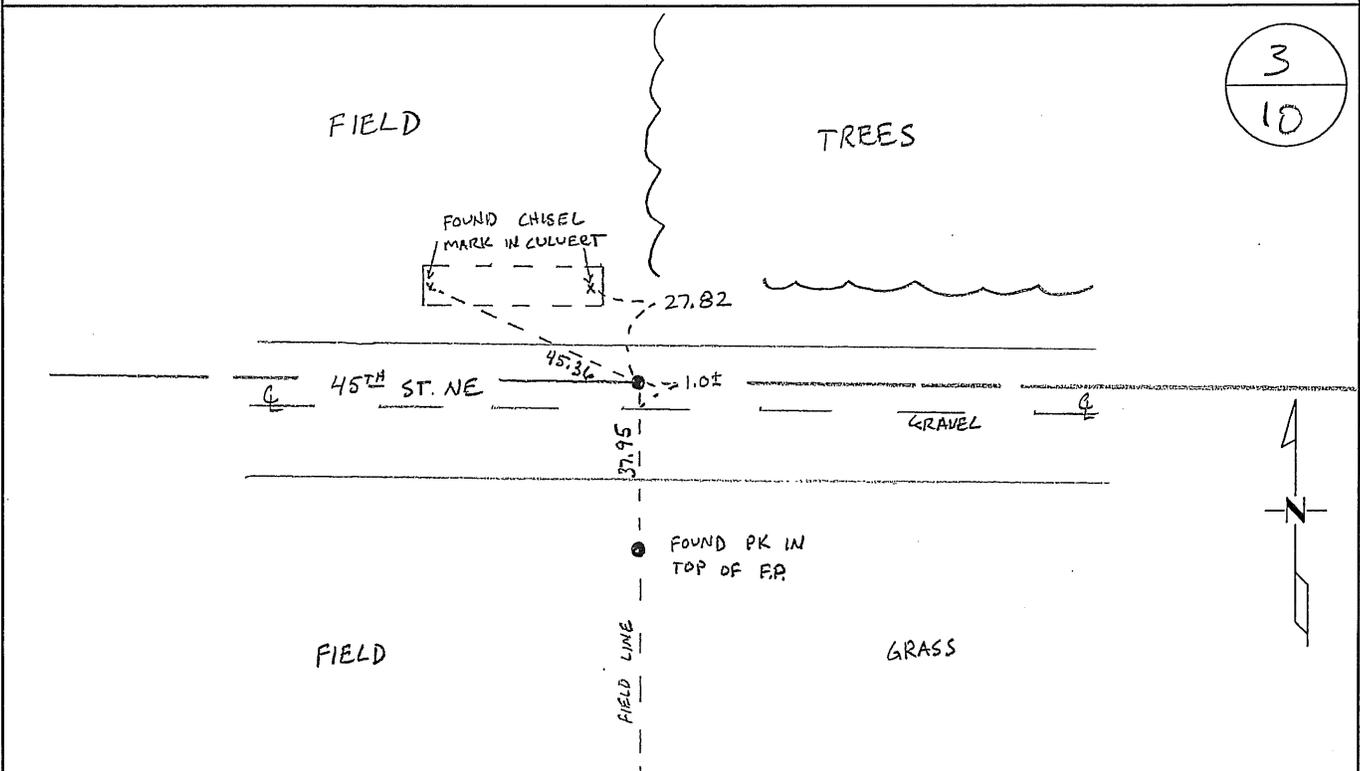

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy Benton County Surveyor
License No. 45872

Date: 11/06/2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:**K101**

The North Quarter Corner of Section 10, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post with bearing trees:

11" Maple	N 12 W	48 links
11" Elm	S 1 E	31 links

A line tree was noted as a 11" Elm East 22.39 chains.

1929 County Surveyor's Record Book 1, page 89 and Record Book A, Map No. 50 shows H.G. Elletson surveyed Section 3, doing a complete section subdivision with all 1/16th corners set. The survey notes an iron monument set by lost method with the following reference ties:

18" Elm	SE	60.0
12" Boxelder	NE	53.4

He shows a distance of 5255.6 feet between the NE and NW corners Sec 10.
 (Notes in Notebook 48)

1968 County Surveyor's Record Book 1, page 103, and County Engineer's notebook No. 2, page 32, note an iron found 2627.8 feet from the NW corner Sec 10 and 1313.9 feet from 1/16th corner east.

1977 Paul Wellen, LS 10461, found a ½" iron monument per County Engineer's records at the centerline of a road east/west. He filed a Certificate of Location (#147244).

2004 Found ½ " iron pipe with cap No. 12236 in center of east-west road. Measured 2629.37 feet to the NW corner and 2629.95 feet to the NE corner. Also found ½ " iron pipe 1313.82 feet east.

County Coordinates Obtained by GPS to iron pipe:

NAD 83 (1996 Adjustment)

N- 127095.359

E- 529456.753

Pipe agrees reasonably well to corner set in 1929.

2008 The County Surveyor's Office searched and found a ½" iron pipe down 0.3' below an east-west gravel road (45th St. N.E.), at 1'± north of centerline. Position agrees with field lines to the north and south. Comparing 1968 distances to the NW Cor. and the 1/16th corner to the east gives 2629.37 ft. & 1313.85 ft. vs. 2627.8 ft. & 1313.9 ft., respectively. The Surveyor accepts the position and set new ties. Coordinates to same obtained by GPS agree with those reported in 2004, above.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North 1/4 Corner of Section 10, Township 36, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 6-23-79 found a 1/2" Iron Monument
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

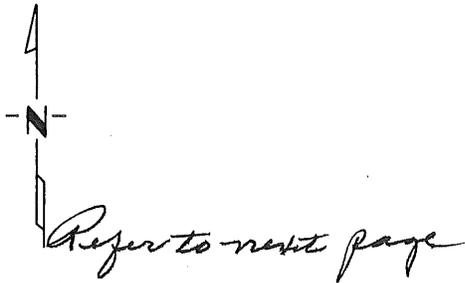
Refer to next page

Statement of evidence relative to this corner location is on back of page. #147244

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul E. Wellen

SIGNATURE DATE 1/3/78

Registration No. 10461

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 4 P. .M. on the 10th day of January A.D., 19 78

Register of Deeds F.A. Johnson
By P.E., Deputy

DOCUMENT NO. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH 1/4 Corner of Section 10, Township 36, Range 29, 4th P.M.
STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 6-23-77 found a 1/2" IRON MONUMENT
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

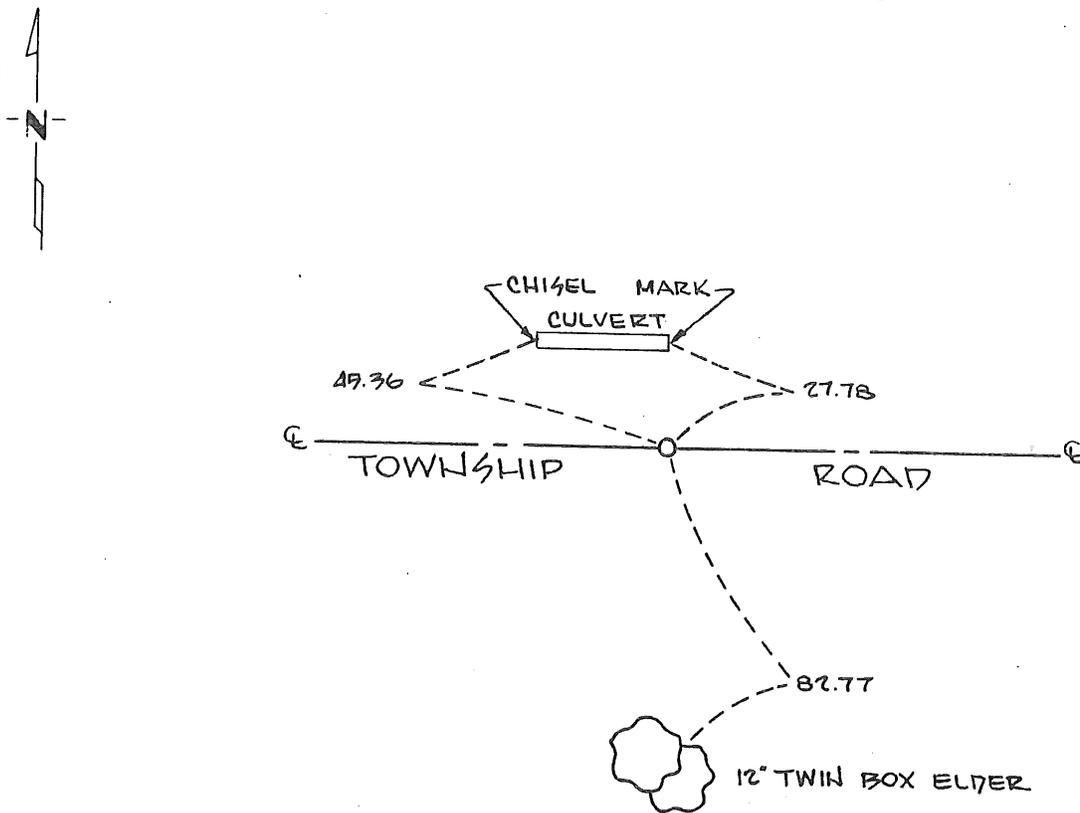

Statement of evidence relative to this corner location is on back of page. **147244**

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision

Paul Miller 1/3/78
SIGNATURE DATE

Registration No. 10461

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 4 P. M. on the 10th day of January A.D., 1978

Register of Deeds B.A. Johnson
By A.E., Deputy

DOCUMENT NO. _____