

Certified, Filed and or Recorded on
Dec. 16, 2008 AT 01:46PM


Signed: BW
MARILYN J NOVAK G V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 13, Township 36N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/14/08 found a CAST IRON MONUMENT DOWN 0.15'
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

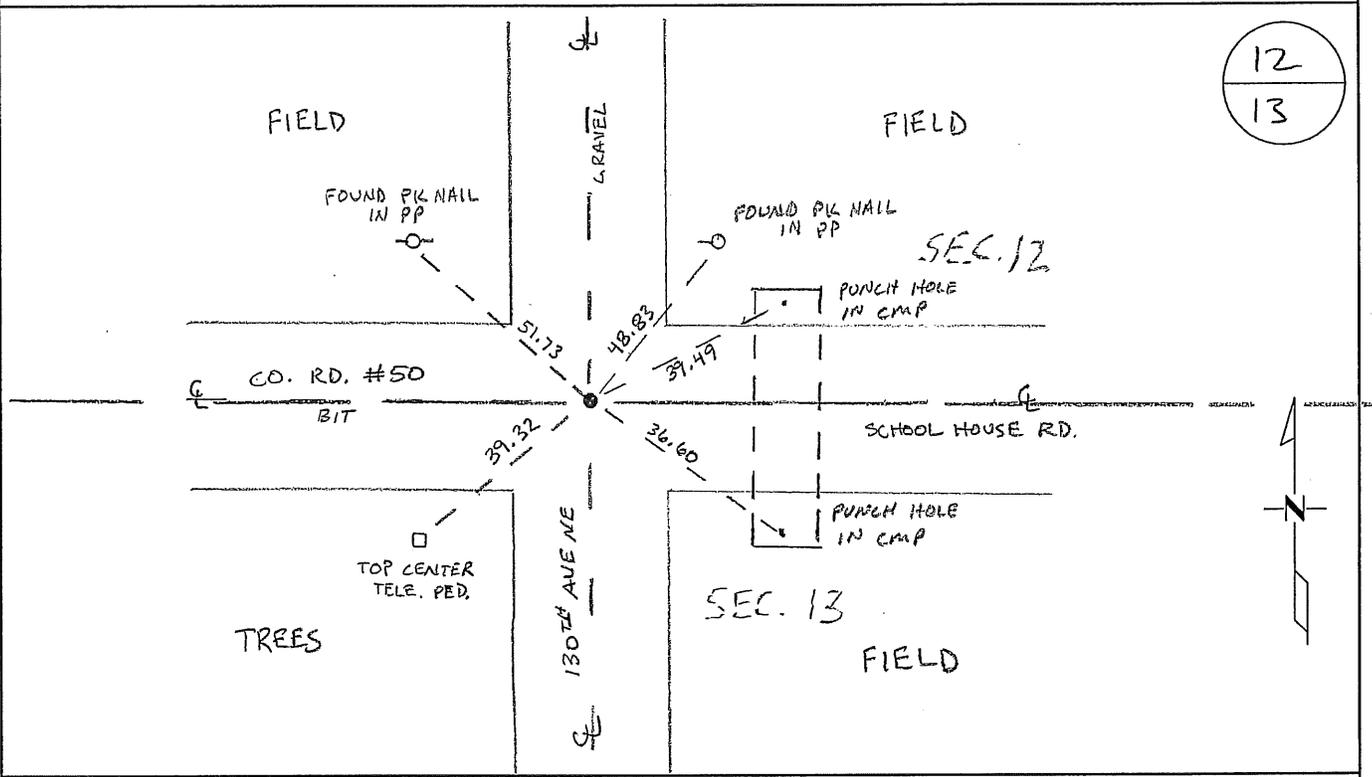

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. O'Byrne
Deputy Benton County Surveyor
License No. 45872

Date: 11/06/2008
PAGE 1 OF 2

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:**K131**

North Quarter Corner of Section 13, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey established this corner and marked by a wood post with bearing trees

10" Blk Ash	N 84 ½ E	5 links
5" Blk Ash	S 47 E	25 links

1933 County Engineer's Notebook No. 67 shows road survey by H. G. Elletson running east-west. Corner is shown as a spike in center of road with town road north and south. Stationing gives distances of 2583.5 feet to the NE corner and 2597.1 feet to the NW corner with no angle.

Undated County Surveyor's Record Book 1, page 111, notes an iron with the following reference ties:

Cor FP	NE	45.1
TP	SE	39.2

1987 Paul Wellen, LS 10461, set a cast iron monument at the centerline of roads north/south/east/west. He filed a Certificate of Location (#182951).

2003 Westwood Professional Services, Inc. found CIM. Measured 2598.51 feet to the NW corner.

2008 The County Surveyor's Office searched and found a cast iron monument approximately 0.2' below the surface of the intersection of east-west bituminous road (County Road No. 50) and gravel road (130th Avenue N.E.). Position agrees with 1933 distances to the NE and NW corners (2580.72 ft. & 2598.51 ft vs. 2583.5 ft. & 2597.1 ft, respectively). The Surveyor accepts the CIM position and set new ties.

County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N- 122079.536
 E- 540083.933

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 13, Township 36, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
- left monument as found, lowered monument, removed monument (explain)
- On 4/13/87 placed a Cast Iron Monument

SKETCH OF REFERENCE TIES

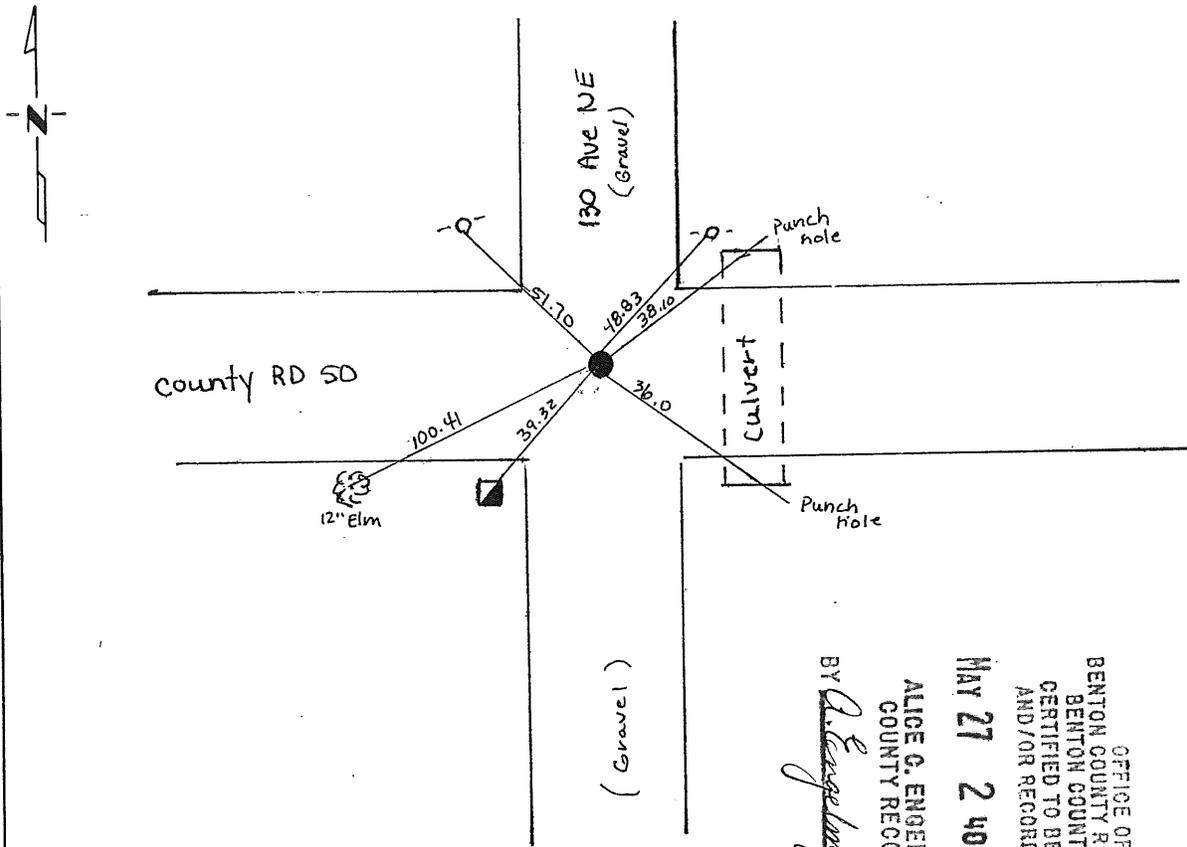

BY *Alice G. Engelmeier*
 ALICE G. ENGLMEIER
 COUNTY RECORDER
 MAY 27 2 40 PM '87
 BENTON COUNTY RECORDER
 BENTON COUNTY, MN
 CERTIFIED TO BE FILED
 AND/OR RECORDED ON

182951

Statement of evidence relative to this corner location is on back of page _____

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sam J. Miller 5/5/87
SIGNATURE DATE

Registration No. 10461

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

CERTIFICATE OF REPLACING SECTION CORNER

Corner to Sec. Center Sec. 14 T. 36 N. R. 29 W

State of Minnesota }
County of Horton } ss.


I hereby certify that on 24 day of August 19 50

I found the center of section Corner Sec. 14, T. 36 N., R. 29 W

which was evidenced by Iron pin

and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a permanent marker consisting of precast concrete monument with aluminum cap

I further certify that I established two reference or witness monuments consisting of precast concrete monuments with aluminum caps which reference or witness monuments are located in the manner following:

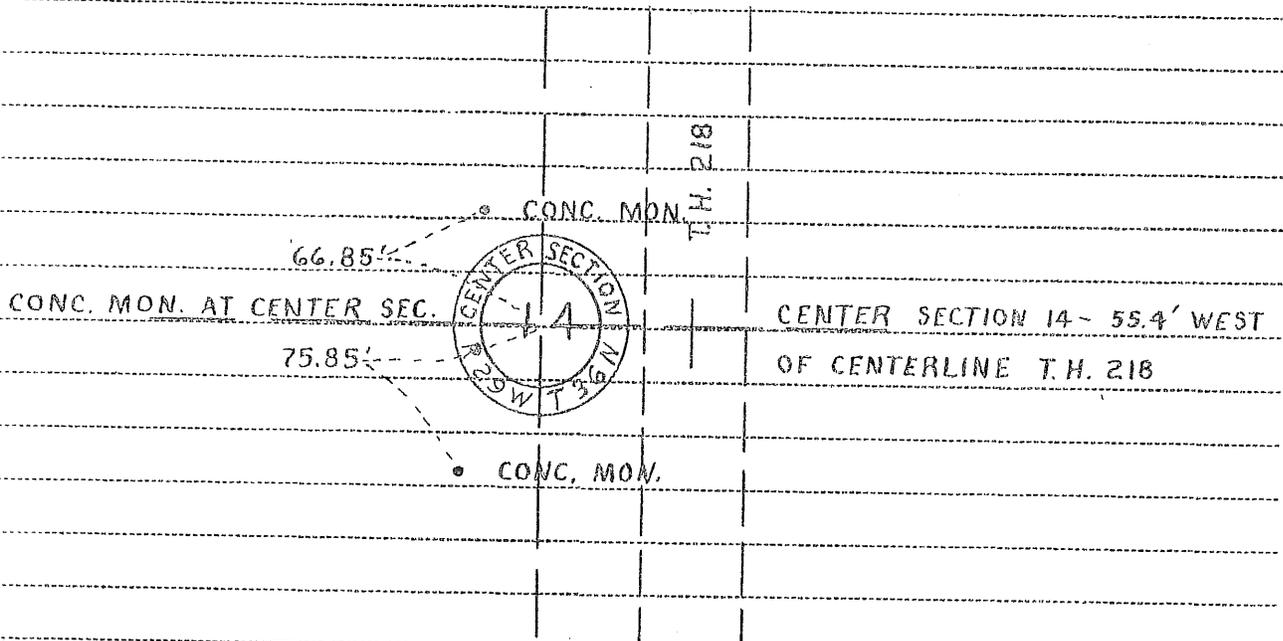

Dated at Brainerd Minn., this 2 day of June 19 50

Signature of Lynn M. Carlson, Civil Engineer, Minnesota Highway Surveyor

OFFICE OF REGISTER OF DEEDS }
County of } ss.

I hereby certify that the within instrument was filed in this office for record on the day of A. D. 19 at o'clock M.

Register of Deeds

By Deputy

CERTIFICATE OF REPLACING SECTION CORNER

Corner to Sec. 11 & 14 T. 36 N. R. 29 W


State of Minnesota }
County of Benton } ss.

I hereby certify that on 24 day of August 1950

I found the quarter Corner of Sec. 11 & 14, T. 36 N., R. 29 W
which was evidenced by 2" x 2" wood hub

and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a
permanent marker consisting of precast concrete monument with aluminum cap

I further certify that I established Iron
reference or witness monuments consisting of precast concrete monuments with aluminum caps
which reference or witness monuments are located in the manner following:

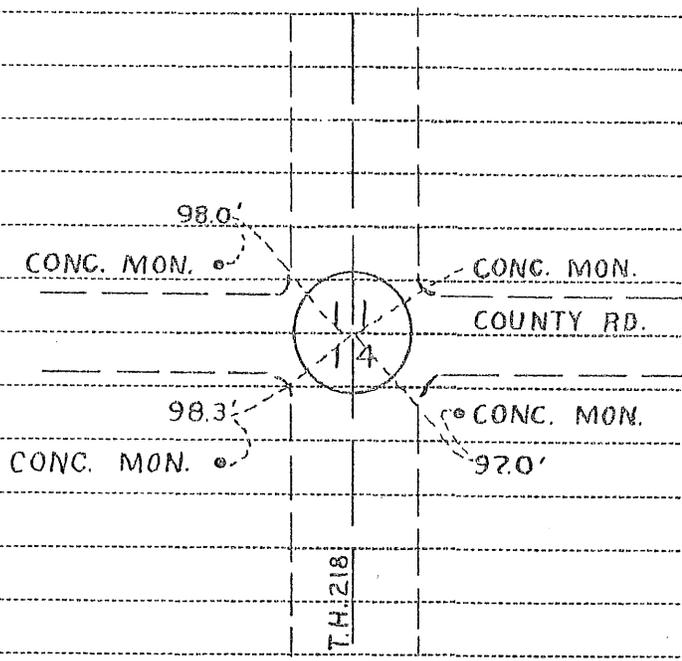

Dated at Brainerd Minn., this 2 day of June 1950

Signature of J. M. Carlson
Civil Engineer Surveyor
Minnesota Highway Department

OFFICE OF REGISTER OF DEEDS }
County of } ss.

I hereby certify that the within instrument was filed in this office for record on the
day of A. D. 19 at o'clock M.

Register of Deeds

By Deputy