

MARILYN J. NOVAK
COUNTY RECORDER
BY Marilyn J. Novak DEPUTY

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

295390

2003 FEB 12 P 2:51

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter _____ Corner of Section 19, Township 36, Range 29
4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

On 12/18/01 found a 1/2" open iron
DATE

left monument as found lowered monument removed monument (explain)

On 12/18/01 placed a cast iron monument at the location
DATE
of the 1/2" open iron

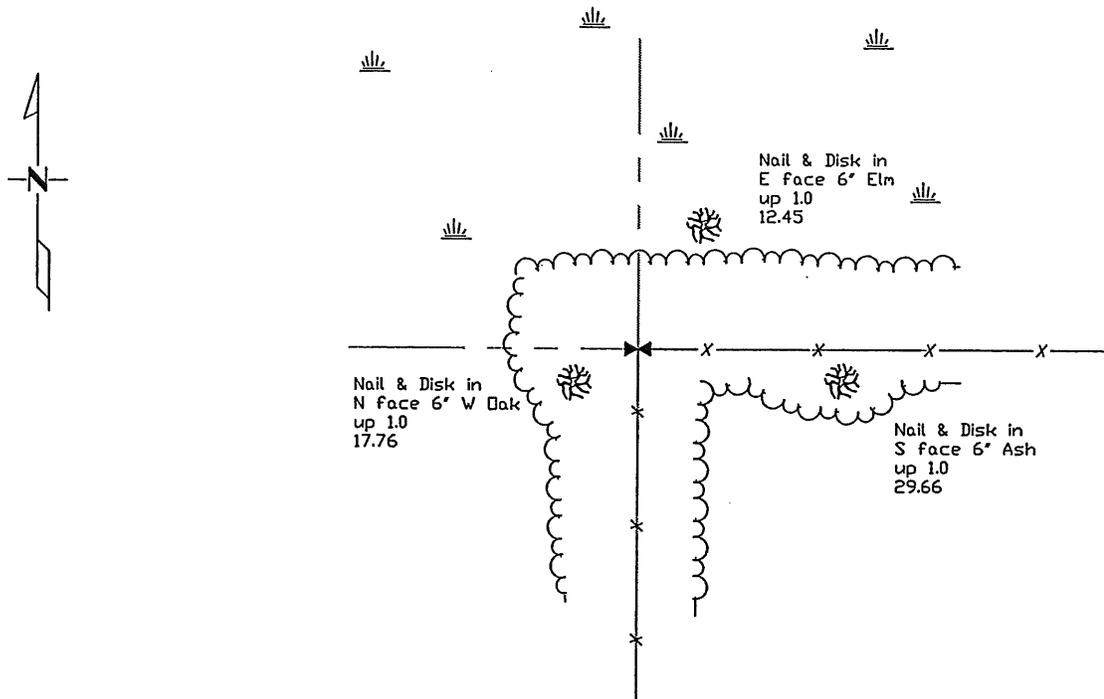

New ties are to the head of a nail with a disk marked "Corner Tie".

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Marilyn J. Novak Date 2/10/03 License No. 12684

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

K191

The North Quarter Corner of Section 19, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.

1855 GLO note a wood post was set and bearing trees were recorded
6" B. Oak S 39 E 108 links
6" B. Oak S 50 E 112 links

2001 Westwood Professional Services, Inc. found a 1/2" iron pipe near a fence corner. The fence lines come from the east and the south and we accepted the pipe as marking the obliterated corner position. We removed the 1/2" iron pipe and placed a cast iron monument at its location.

We measured 5693.09 feet between section corners. The GLO distance is 79.72 chains (5261.52 feet). It is apparent along the west closing sections of this township that the original GLO surveyor did not run the last 1/2 mile of the east-west section lines. The last 1/2 miles are 300 to 500 feet longer than reported in the GLO notes. We measured 2734.64 feet to the NE Cor Sec 19. The found pipe is 8.8 feet north of a straight line and 121.90 feet east of lost position. Using the pipe found in the center of Section 18 fits a fence line south.

Coordinates Obtained by GPS (1/2" OPEN)
NAD 83 (1996 Adjustment)
N-116255.016
E-513712.849