

Certified, Filed and or Recorded on
Nov. 07, 2008 AT 02:18PM


Signed: JU
MARILYN J NOVAK J V 4
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 22, Township 36N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/13/08 found a CAST IRON MONUMENT DOWN 0.3', EXCAVATED VICINITY FOR OTHER EVIDENCE - NOTHING FOUND...
- left monument as found lowered monument removed monument (explain)
- On 11/05/08 placed an 1/2" IRON PIPE IN PLACE OF C.I.M. AND GAS PIPE POSITION. PIPE IS CAPPED 19552.

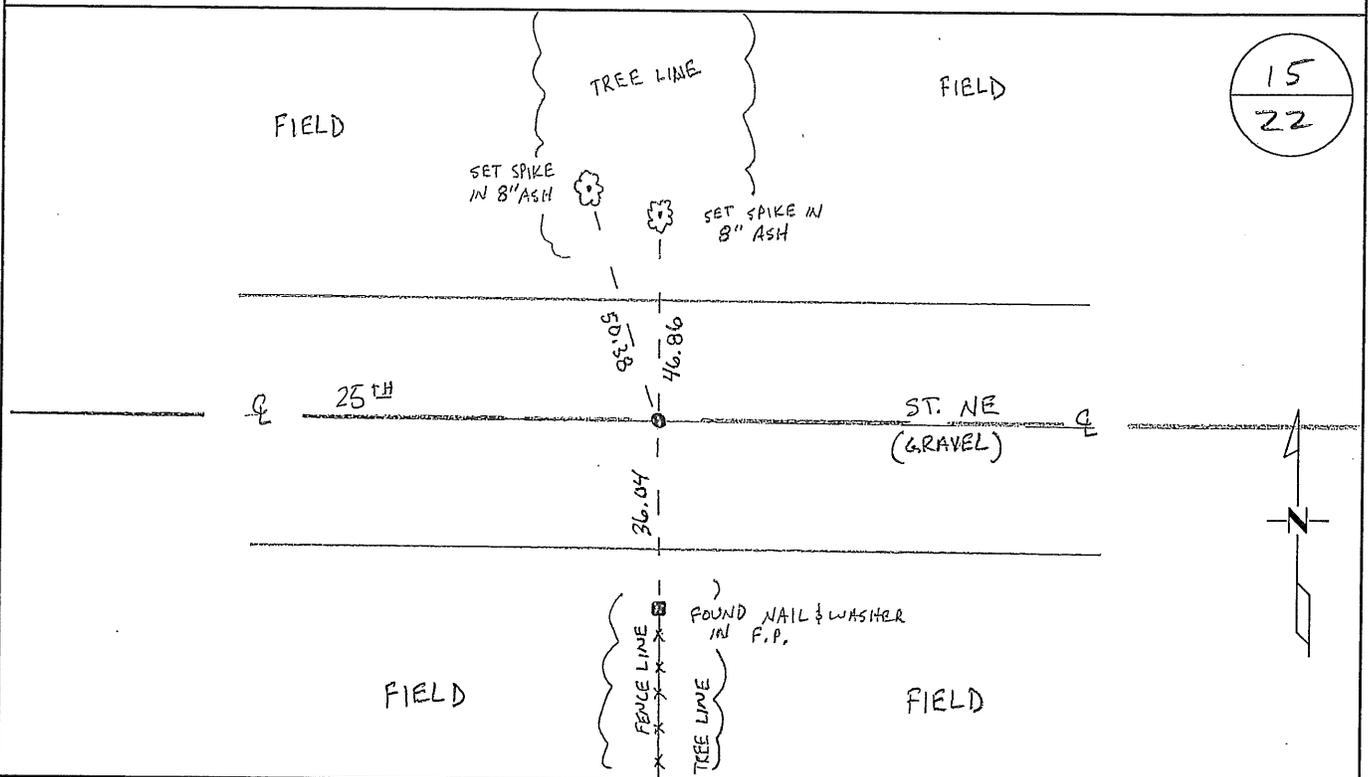

15
22

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oley
Deputy Benton County Surveyor
License No. 45872

Date: 11/06/2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

K221

The North Quarter Corner of Section 22, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey established corner marked by a wood post with bearing trees:

10" Elm	N 56 E	10 links
12" Blk Ash	S 16 E	10 links

1992 Paul Wellen, LS 10461, set a cast iron monument at the centerline of roads east/west, a tree line north, and a fence line south.

2008 The County Surveyor's Office searched and found Wellen's 1922 cast iron monument as reported above. The corner histories for the NE and NW Corners of Sec. 22 indicate stones or gas pipes, thus the Highway Dept. excavated a 10'x6'x5' hole in the east-west gravel road of 25th St. NE. No evidence was recovered. During the excavation process, Wellen's cast iron monument was removed and afterwards replaced by a 1/2" x 14" iron pipe capped 19552. Distances to the NW and NE Corners gives 2646.77 ft. and 2655.40 ft., respectively. Ties were made.

County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-116578.150
 E-529539.430

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter _____ Corner of Section 22, Township 36, Range 29, 4 P.M.


STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 8/27/92 placed a Cast iron monument (Down 0.2')
DATE

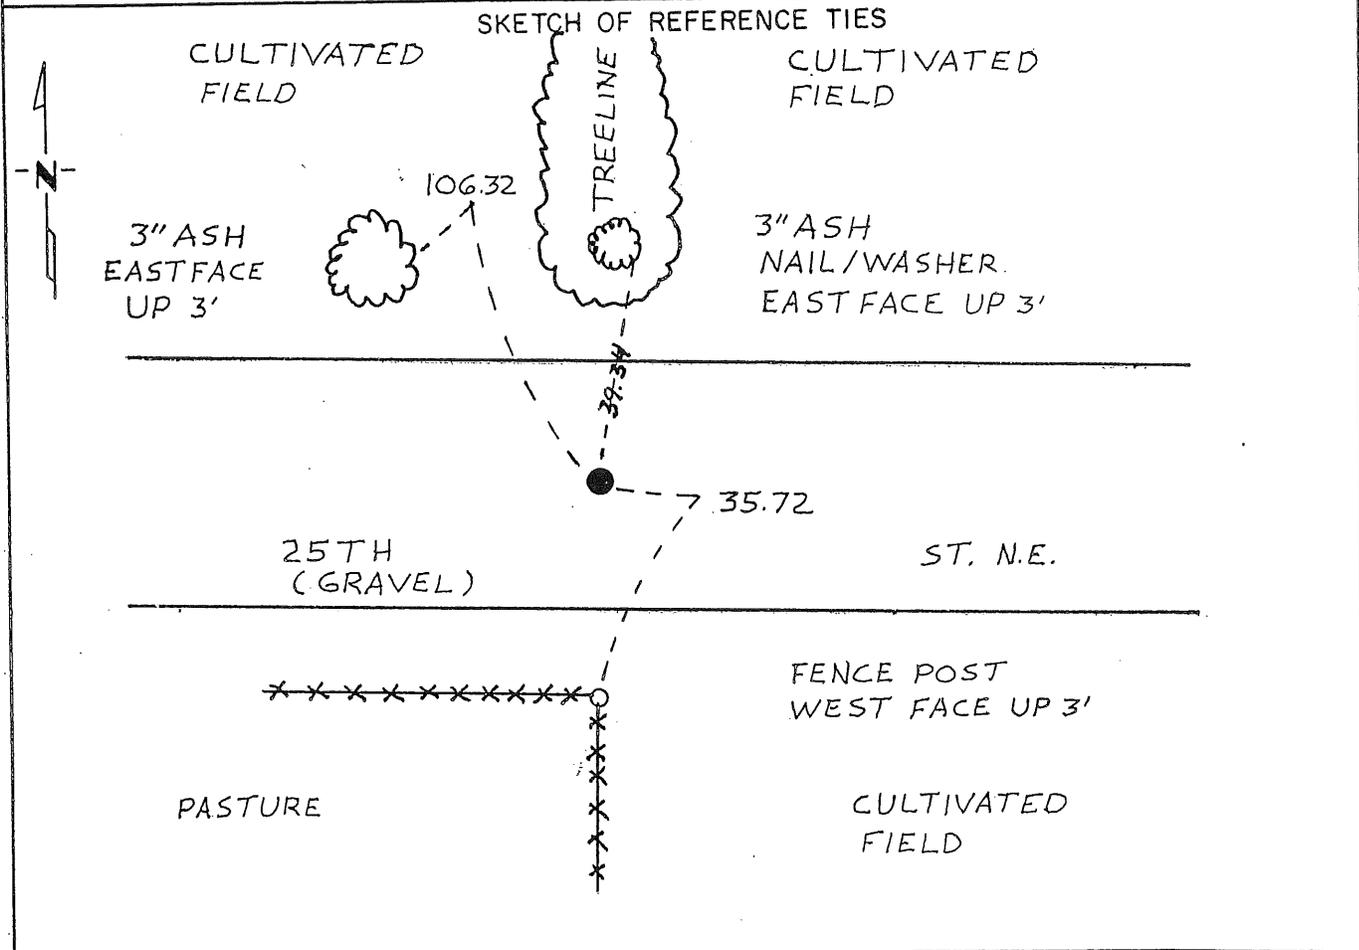

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] _____
SIGNATURE DATE 2-16-93

Registration No. 10461

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

NORTH QUARTER CORNER, SECTION 22, T 36N, R 29W, 4TH P.M.

1. During the G.L.O. survey of 1852, Mr. Edwin James Jr., a U.S. Deputy Surveyor, set a wood post to mark said corner.
2. Benton County's old surveyor's books provided no information to locate said corner.
3. On August 27, 1992, Paul E. Wellen & Associates searched for said corner at center line of 25th Street NE, and tree line as evidence of said corner. On August 27, 1992, we set a Cast Iron Monument at intersection tree line to north and center line of road. Also, we established new reference ties as indicated.

216309

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND AS RECORDED ON

JUL 14 1 24 PM '93

ALICE G. ENGELMEYER
COUNTY RECORDER

BY *JS* DEPUTY