

A 332042

Certified, Filed and or Recorded on  
OCT. 26, 2005 AT 03:41:00PM

Signed: BW  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 24, Township 36 North, Range 29 West,  
4th Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 9/8/2005 found a Cast Iron Monument  
DATE

left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

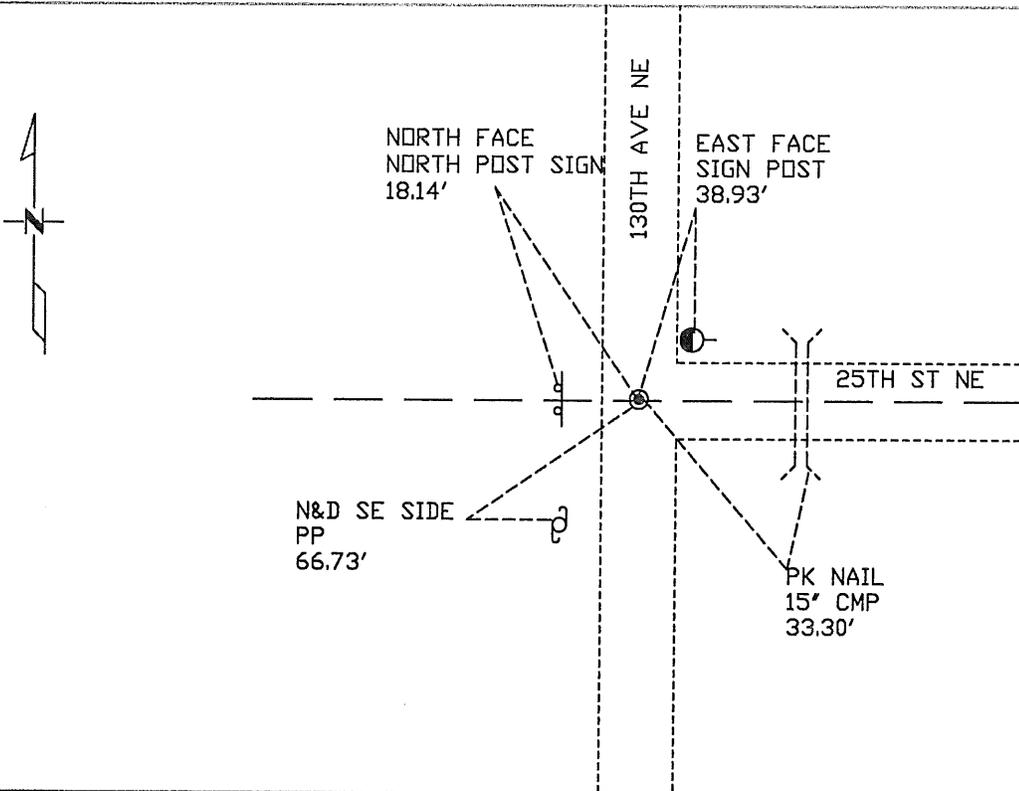

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature] Date 10/19/2005 License No. 12684

Title:  Land Surveyor     Professional Engineer     County Surveyor     County Engineer

**Statement of Evidence:**

**K241**

North Quarter Corner of Section 24, Township 36 North, Range 29 West, St. George Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.  
12" Blk Oak                      N 1 W                      224 links
- 2002 No resurvey information was found on this corner in the Benton County records.
- 2005 On 9/8/05, WSN found a cast iron monument in center of road intersection with roads running north-south and east. Have no information on who set CIM. Measured 2624.96 feet to the NW corner and 2559.00 feet to the NE corner and found the CIM to be 7.84 feet north of a straight line between section corners. With no other information, accepted the CIM as marking the obliterated corner position.  
County Coordinates Obtained by GPS to CIM:  
NAD 83 (1996 Adjustment)  
N- 116755.293  
E- 540159.317