

Certified, Filed and or Recorded on
Oct. 07, 2008 AT 02:38PM


Signed: BW
MARILYN J NOVAK B V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 26, Township 36N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/06/08 found a C.I.M. AT 70'± NORTH OF & HIGHWAY 95, 22'± EAST OF & HIGHWAY 25.
- left monument as found lowered monument removed monument (explain)
- On 10/06/08 placed an P.K. NAIL WITH BENTON COUNTY SURVEYOR DISK

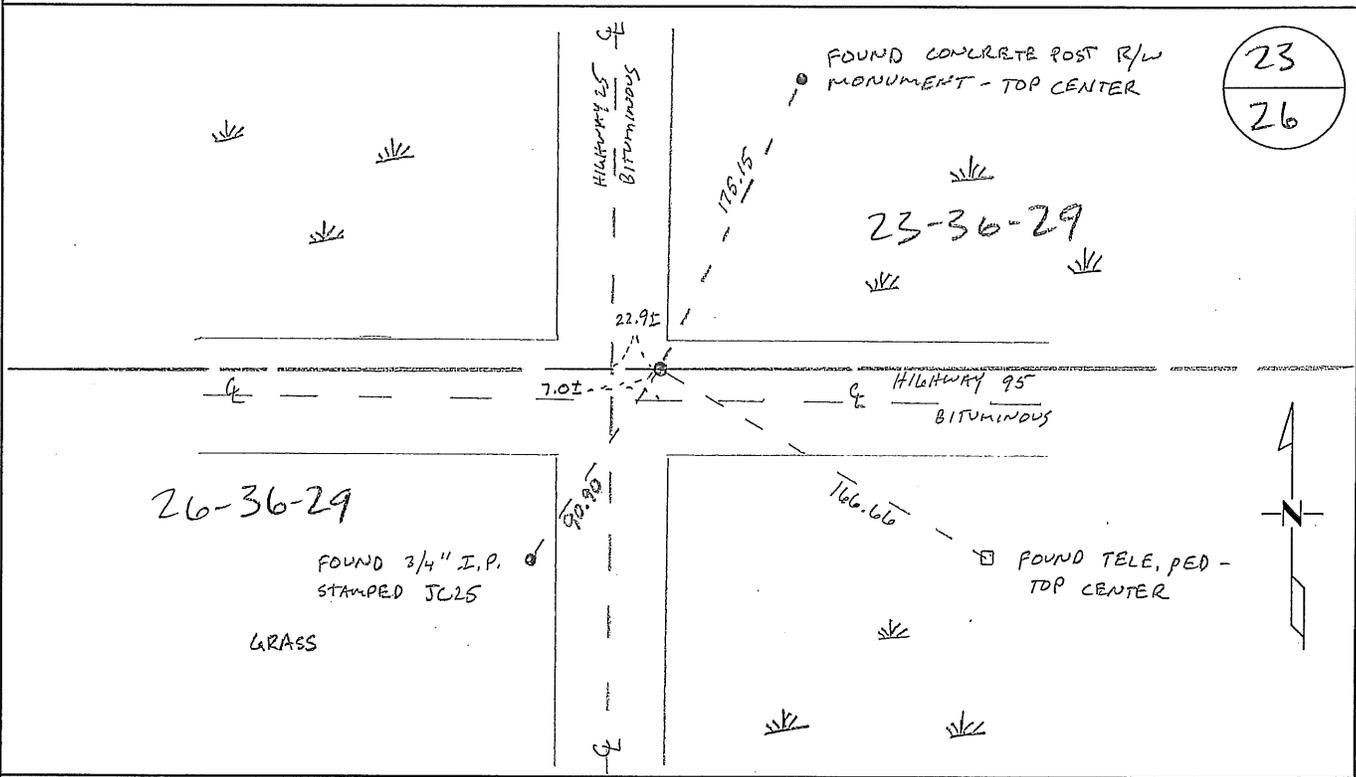

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jason W. Oley
Deputy Benton County Surveyor
License No. 45872

Date: 10/06/08

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:**K261**

The North Quarter Corner of Section 26, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey established corner marked by a wood post with bearing trees:
- | | | |
|-------------|----------|-----------|
| 5" Tamarac | N 25 ½ E | 120 links |
| 20" Blk Oak | S 88 W | 795 links |
- 1901 County Road Book, pages 209 and 265, shows road surveyed by John Whilt, County Surveyor, running from NW corner Section 30, 36-29 to North 1/4 corner Section 29, 36-28 on section lines. Gives distance of 80.30 chains for the north line of Sec. 26.
- 1925 County Engineer's notebook No. 46 shows road run from the NW corner to the NE corner of Section 26. No ¼ corner is noted. Distance given is 5267.6 feet.
- 1942 Minnesota Highway Department notes in Book 89, pages 1-31, show that the corner is assumed to be at the intersection of roads east/west/south. The location was referenced as 49.3 feet north of POT.
- 1949 Road was reconstructed in location 42 feet north of 1942 location and on MN/DOT alignment map for TH 95 the corner is referred to as being 7.3 feet north of new centerline PI at intersection of old roads east, west, and south.
- 1950's MN/DOT alignment map for TH 25 shows the corner 22.4 feet east of the new centerline.
- 1999 James Nielsen, LS 11865, set a cast iron monument 7.3 feet north of PI for TH 95 per alignment plans. He filed a Certificate of Location (#261573).
- 2002 Measured 2597.07 feet to the NE corner and 2663.30 feet to the NW corner.
 County Coordinates Obtained by GPS to CIM:
 NAD 83 (1996 Adjustment)
 N-111134.401
 E-534913.418
- 2008 The County Surveyor's Office searched and found a cast iron monument beneath the bituminous of State Highway 95, at 7.0 ft.± north of centerline and 22.9 ft.± east of the centerline of north-south State Highway 25. Position agrees with Nielsen's ties and alignment information from MNDOT notes in 1949 and 1950's. The Surveyor accepts the position and updated ties. Coordinates obtained by GPS were the same as those reported by Westwood Professional Services, Inc. in 2002.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter _____ Corner of Section 26, Township 36N, Range 29W, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On _____ found ~~xx~~ nothing

left monument as found, lowered monument, removed monument (explain)

On 02/22/1999 placed a Mn/DOT C.I.M.

SKETCH OF REFERENCE TIES

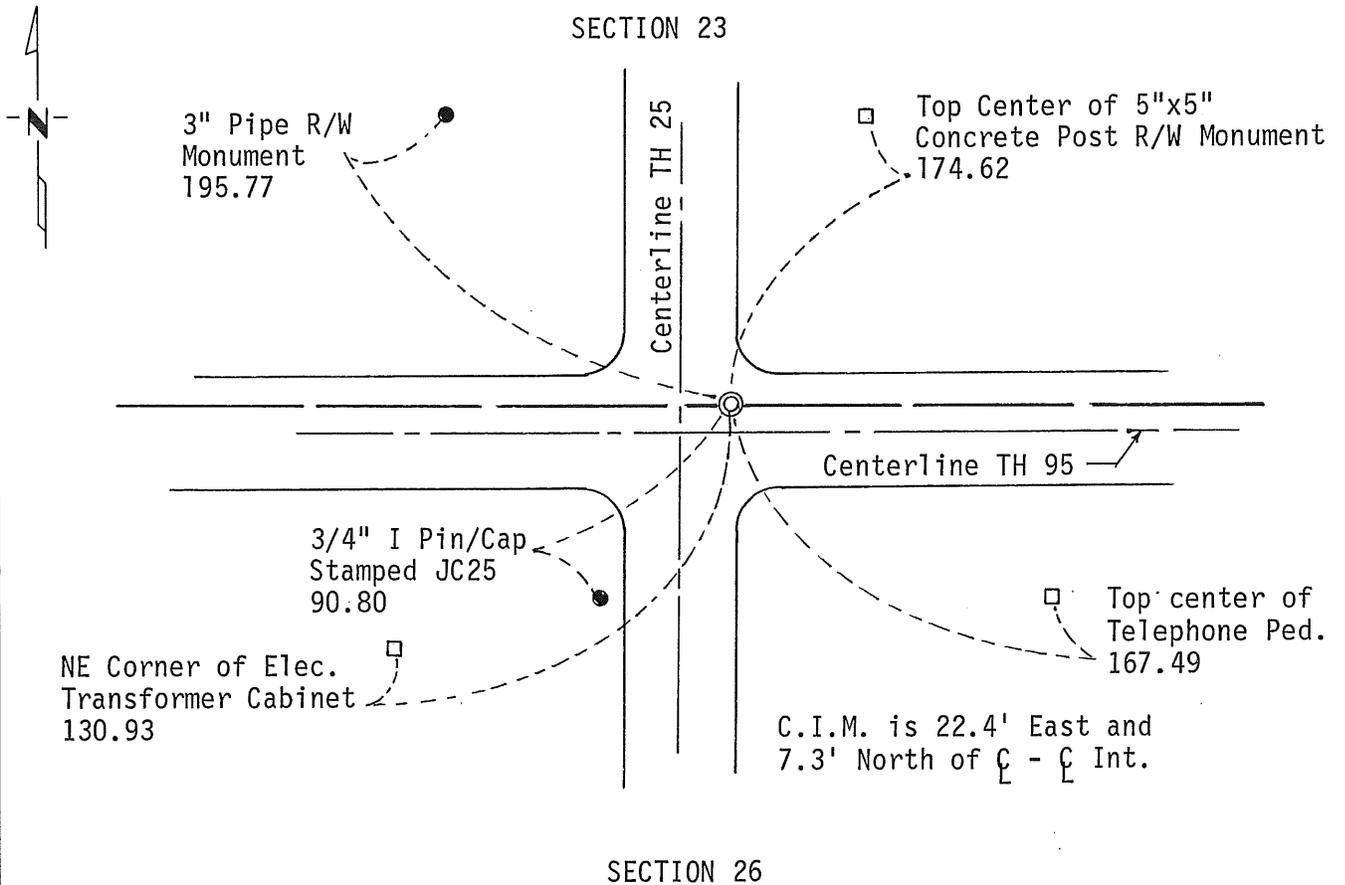

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James W. Nelson 4/12/99
SIGNATURE DATE

Registration No. 11865

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

NORTH QUARTER CORNER SECTION 26, TOWNSHIP 36 NORTH,
RANGE 29 WEST, BENTON COUNTY, MINNESOTA

The original public land survey was run in 1855 and a wood post was set to mark the corner.

In 1942, the Minnesota Highway Department notes (Book #89, page 1-31) assume the corner to be at the intersection of the roads east-west and south. This corner location was referenced as 49.3 feet north of LWP.O.T. Station 353+41.7.

In 1949, the highway was reconstructed 42 feet north of the LWline and the corner location was referenced as 7.3 feet north of L^{or} PI Station 353+42.4.

In 1997, the Minnesota Highway Department searched for the corner, no evidence was found.

In 1999, the Minnesota Department of Transportation set the corner 7.3 feet north of L^{or} P.I. Station 353+42.4.

For details and survey analysis contact the Minnesota Department of Transportation Surveys Office in Baxter.

261573

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

OCT 6 8 36 AM '99

ALICE G. ENGELMEYER
COUNTY RECORDER

BY ba DEPUTY