

Certified, Filed and or Recorded on  
Nov. 06, 2008 AT 08:43AM


Signed: CK  
MARILYN J NOVAK G V J  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 32, Township 36 N., Range 29 W.  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 21 OCT 2008 found a CAST IRON MONUMENT, AS SET BY LUNSER IN 1991 PER CERTIFICATE OF LOCATION
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

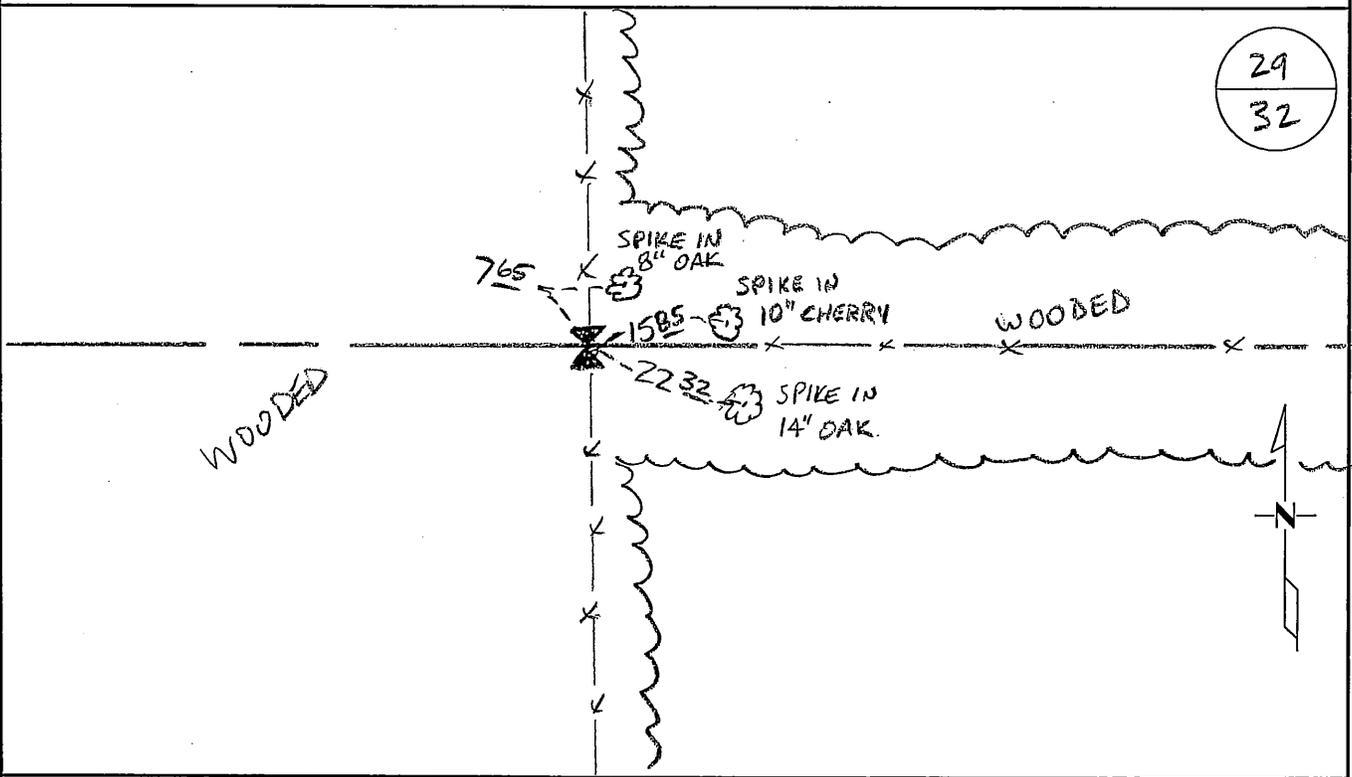

29  
32

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oley  
Deputy Benton County Surveyor  
License No. 45872

Date: 11/04/2008

**Statement of Evidence:**

K321

The North Quarter Corner of Section 32, Township 36 North, Range 29 West, St. George Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey set a wood post with bearing trees:
- |            |          |           |
|------------|----------|-----------|
| 6" Blk Oak | S 2 W    | 18 links  |
| 6" Blk Oak | N 22 ½ W | 453 links |
- 1990 William Lunser, LS 9394, set a cast iron monument at a fence line north/south/east. He filed a Certificate of Location (#201535).
- 2002 No resurvey information was found on this corner in the Benton County records.
- 2008 The County Surveyor's Office searched and found the cast iron monument as set by Lunser in 1990. Position falls at the intersection of old fencelines running north-south and east. Distances to the NW Cor. and NE Cor. measure 2631.74 ft. and 2629.06 ft., respectively. The Surveyor accepts the corner as marking the obliterated position and updated ties.

County Coordinates Obtained by GPS  
NAD 83 (1996 Adjustment)  
N-105598.407  
E-519036.554

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 32, Township 36, Range 29, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 3-3-90 placed a CAST IRON MONUMENT  
DATE

## SKETCH OF REFERENCE TIES

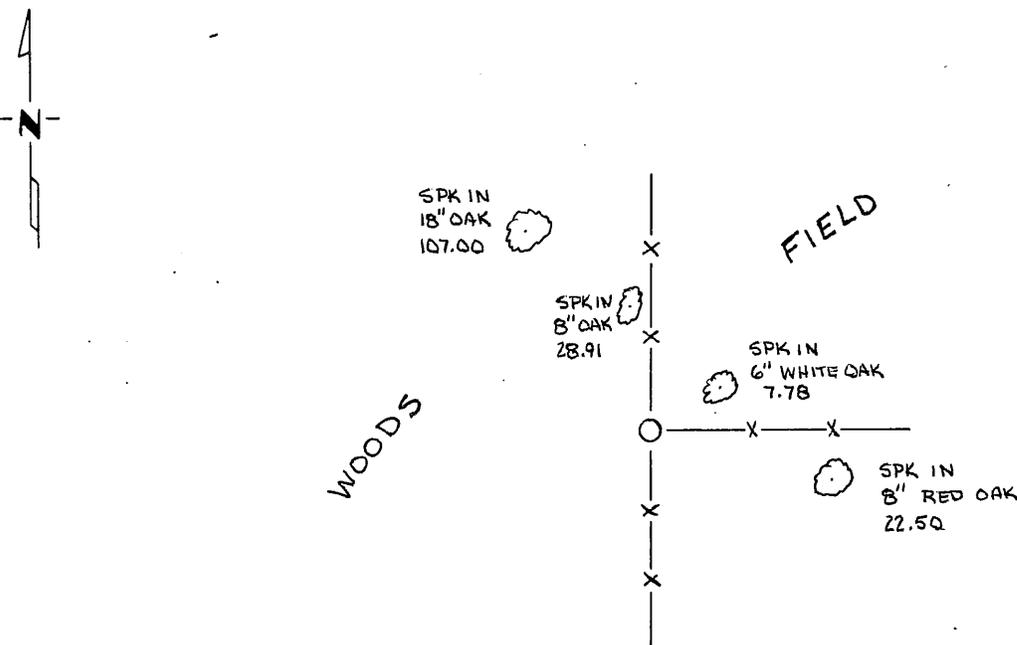

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Lerner 2/14/91  
SIGNATURE DATE

Registration No. 9394

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

Benton County Records showed no reference to this corner other than U.S. Government survey.

On 3-3-90 Searched the area and found no evidence of an existing monument. Placed a cast iron monument at the intersection of a fence line to the North-South and East.

201535

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

FEB 28 12 25 PM '91

ALICE G. ENGELMEYER  
COUNTY RECORDER

BY Jee DEPUTY