

A 360873

Certified, Filed and or Recorded on  
Oct. 14, 2008 AT 10:14AM


Signed: CK  
MARILYN J NOVAK G V  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NDRTH QUARTER Corner of Section 33, Township 36N, Range 29W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/10/08 found a CAST IRON MONUMENT
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

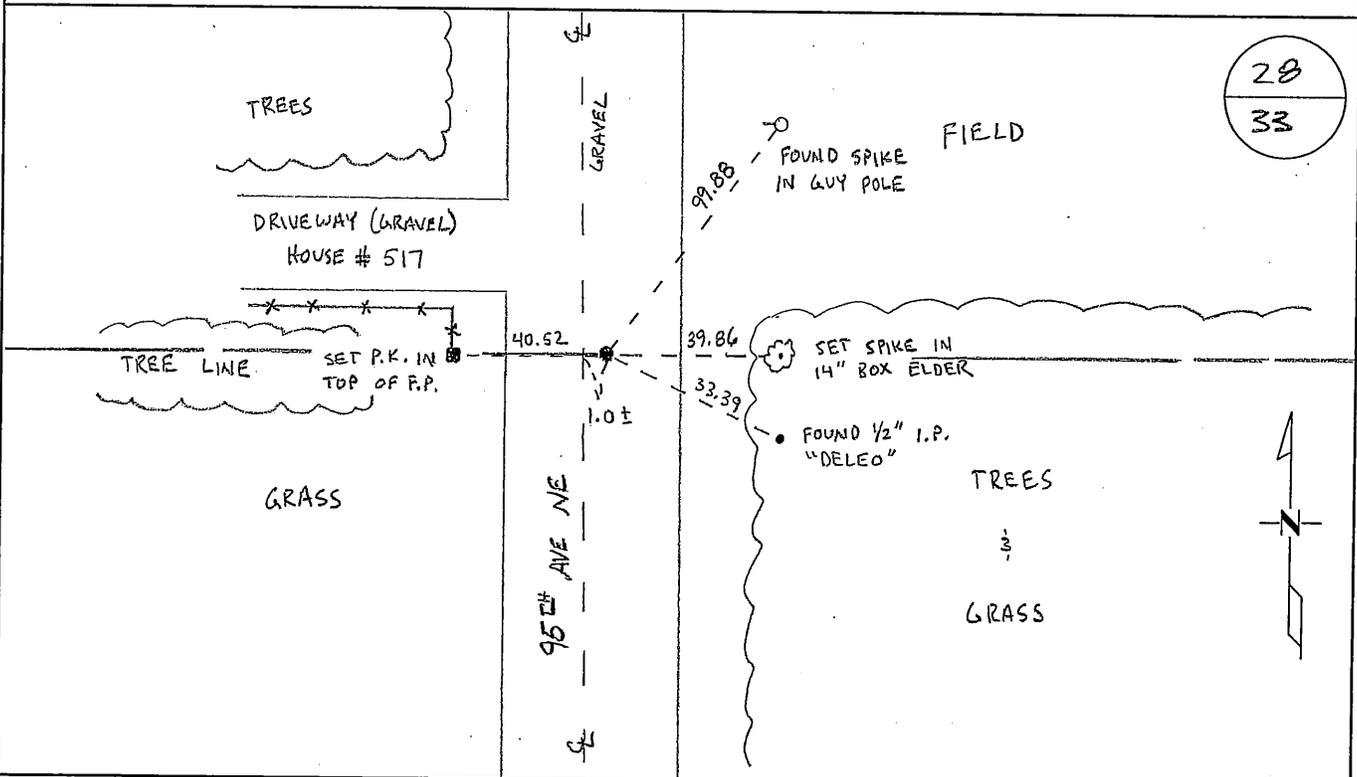

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jam W. Oley  
Deputy Benton County Surveyor  
License No. 45872

Date: 10-13-2008

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

**Statement of Evidence:**

K331

North Quarter Corner of Section 33, Township 36 North, Range 29 West, St. George Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey established corner marked by a wood post with bearing trees:

6" Blk Oak	S 48 E	40 links
6" Blk Oak	N 89 ½ W	13 links

1982 David Regan, LS 12236, set a cast iron monument at a centerline north/south road and a fence line east/west. He filed a Certificate of Location (#163373).

1993 William Lunser, LS 9394, set a cast iron monument at the centerline of roads north/south and a fence line east/west. The 1982 monument was destroyed as well as all but 1 tie due to road construction. He filed a Certificate of Location (#234172). He notes a distance of 2588.40 feet to the NW corner Sec 33 and a distance of 5208.38 feet to the South ¼ corner Sec 33.

2003 Westwood Professional Services, Inc. found a CIM. Measured 2588.51 to the NW corner and 2642.93 feet to the NE corner.


2008 The County Surveyor's Office searched and found the CIM reported by Westwood Professional Services, Inc in 2003. The position fits ties to same by Lunser in 1992. The Surveyor accepts the position and updated ties.

County Coordinates Obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N- 105580.479  
 E- 524253.992

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER corner of Section 33, Township 36, Range 29, 4th P.M.  
Benton County, Minnesota.

On June 10, 1993, A cast iron monument (C.I.M.) was placed at this location.

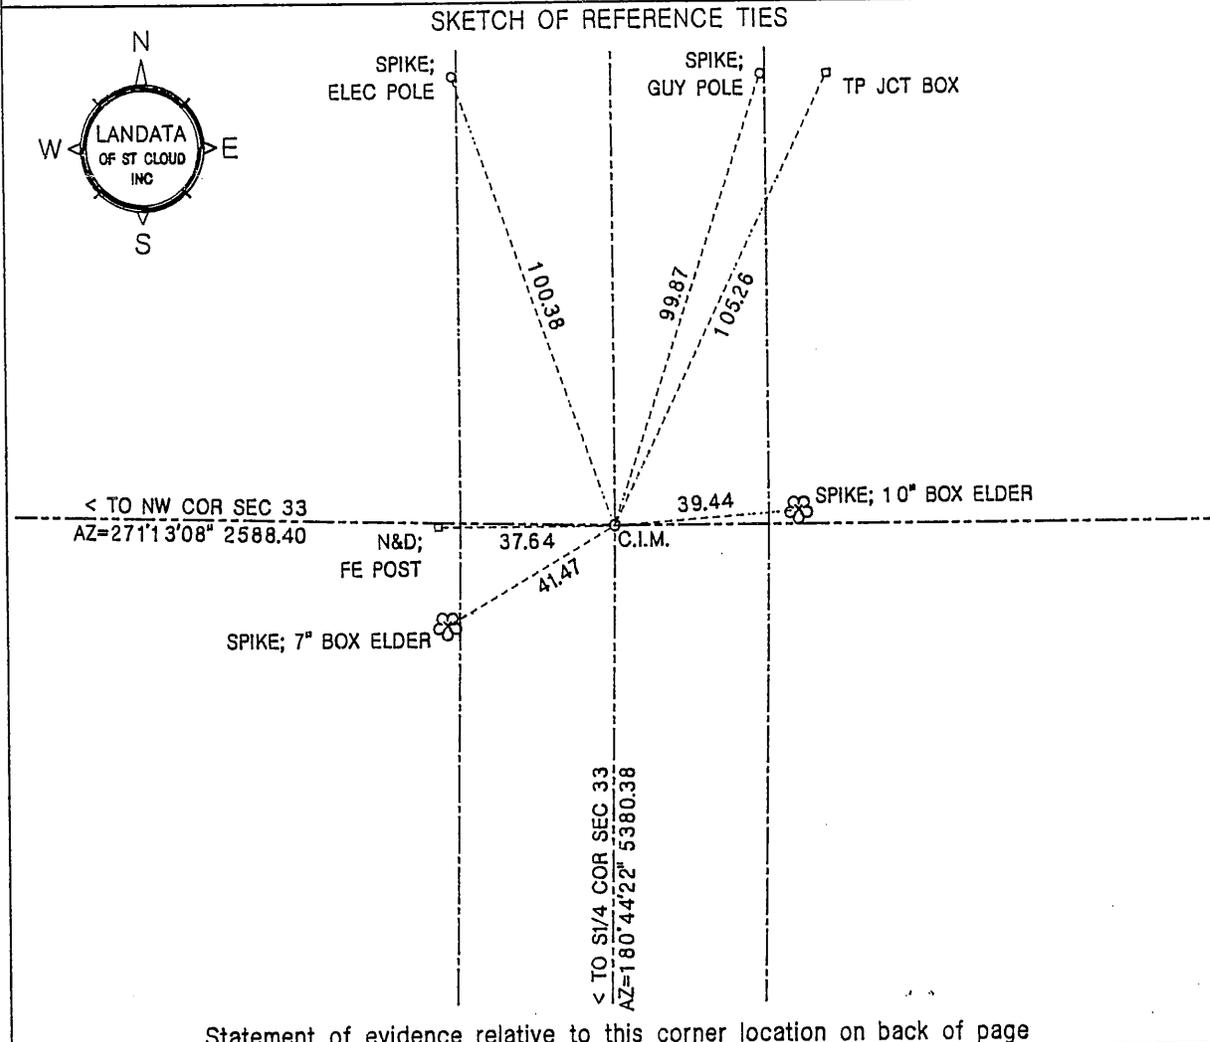

Statement of evidence relative to this corner location on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*William F. Lunser* 3/13/96  
William F. Lunser, L.S. Date  
Mn Reg No 9394

FB; 130/32 DISC; 14

OFFICE OF THE COUNTY RECORDER  
Benton County, Minnesota

I hereby certify that this document was filed in this office at \_\_\_:\_\_\_ M. on the \_\_\_ day of \_\_\_\_\_, 19\_\_\_.

County Recorder \_\_\_\_\_

By \_\_\_\_\_ Deputy

DOCUMENT NO. \_\_\_\_\_

STATEMENT OF EVIDENCE:

David P. Regan, L.S., identified this corner according to his certificate of location dated 9/11/82. Due to subsequent road construction the monument was found broken and all but one reference ties destroyed.

I replaced the monument and referenced the corner with additional ties.

William F. Lunser  
William F. Lunser, L.S.

2 3 4 1 7 2

BEAVER COUNTY RECORDER  
BEAVER COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

APR 10 2 34 PM '96

ALICE O. ENJELMEYER  
COUNTY RECORDER

BY mm DEPUTY xu

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 33, Township 36, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 7/14/82 placed a Benton County cast iron monument on center  
DATE  
north-south Twp. Rd. and on fence lines to east and west

## SKETCH OF REFERENCE TIES

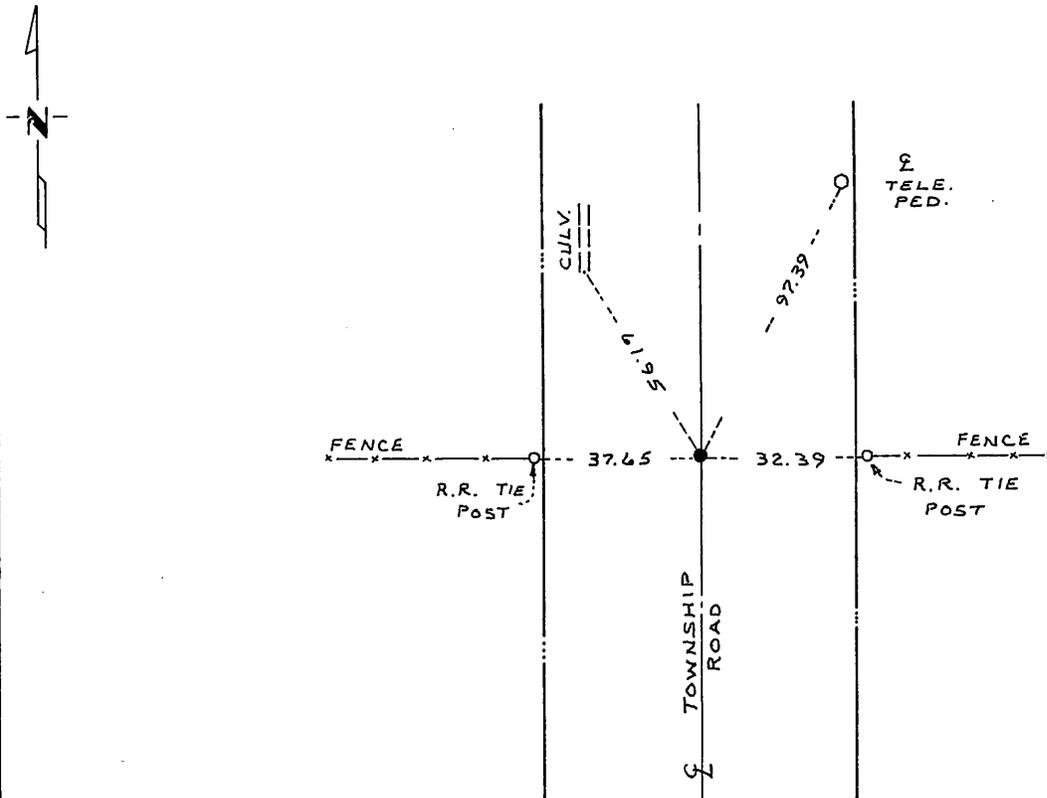

Statement of evidence relative to this corner location is on back of page. **163373**

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David P. Ryan 9/1/82  
SIGNATURE DATE

Registration No. 12236

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

### OFFICE OF THE REGISTER OF DEEDS

County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 11 P.M. on the 18 day of October A.D., 1982

County Recorder  
Register of Deeds T.A. Johnson

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_