

Certified, Filed and or Recorded on
Oct. 14, 2008 AT 10:14AM


Signed: CK
MARILYN J NOVAK G V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 34, Township 36N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/10/08 found a CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On _____ placed on _____

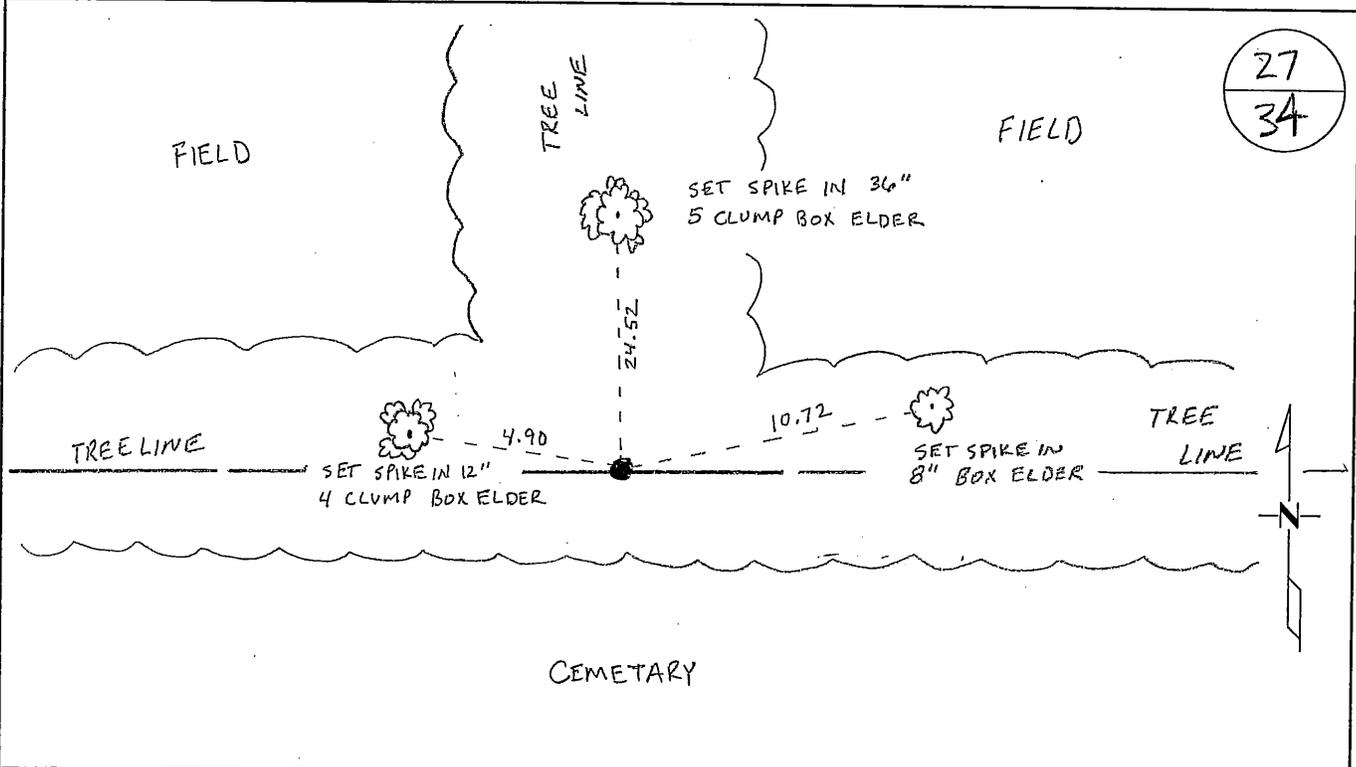

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oley
Deputy Benton County Surveyor
License No. 45872

Date: 10-13-2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:**K341**


North Quarter Corner of Section 34, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey established corner marked by a wood post with bearing trees:
 7" Bur Oak N 89 ½ W 1004 links
- 1914 County Surveyor's Record Book 1, page 151, notes a survey by J. P. Soderstrum where he found an old oak stake at the intersection of fences on the north side of cemetery and drove an iron stake which is 40.48 chains (2671.68 feet) from the NE corner Sec 34. County Surveyor's Record Book A, Map No. 5, shows a survey by Soderstrom in the NE ¼ of Sec. 34. Survey shows 53 rods (874.5 feet) south to the north right of way of road.
- 1916 County Road Book, page 58, contains a road survey by J. P. Soderstrum, which shows he found iron stake set by him 12/22/14. Road run east with same measurement of 40.48 chains to the NE corner of Section 34. County Surveyor's Record Book A, Map No. 23, shows a survey by Soderstrom in the NW ¼ of Sec. 34. Survey shows 13.5 chains (891.0 feet) south to the center of road.
- 1983 Paul Wellen, LS 10461, found a ¾" pipe at an occupation line and replaced it with a cast iron monument. He filed a Certificate of Location (#173396). Measured 2662.86 feet to the NE corner of Section 34. Other information shows a distance of 2662.18 feet to the NW corner.
- 1995 Record plat of STONY BROOK ESTATES by William Lunser, LS 9394, shows corner as a CIM. His Certificate of Location for the NE corner shows a distance of 2659.87 feet to this corner.
- 2005 WSN found CIM and measured 2662.37 feet to the NW corner and 2659.82 feet to the NE corner and 886.0 feet south to the center of east-west road. It appears the iron found in 1983 could be the same iron set by Soderstrum. Consider CIM marking obliterated position.
 County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N- 105641.495
 E- 529558.953
- 2008 The County Surveyor's Office searched and found the CIM as set by Wellen in 1983. Position agrees with Soderstrum's 1914 measurements to the NE Cor. and his 1916 tie to the centerline of the road to the south. Position is accepted as marking the obliterated position. Ties were updated. Coordinates obtained by GPS agree with those recorded by WSN in 2005.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 20th day of April, 19 85
 I did find _____ the north quarter corner of Section 34,
 Twp. 36, Rg. 29, Benton County, Minnesota, which
 was evidenced by 3/4 inch iron pipe

I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of Benton County Cast Iron Monument and that
 I did establish witness or reference monuments as shown below:

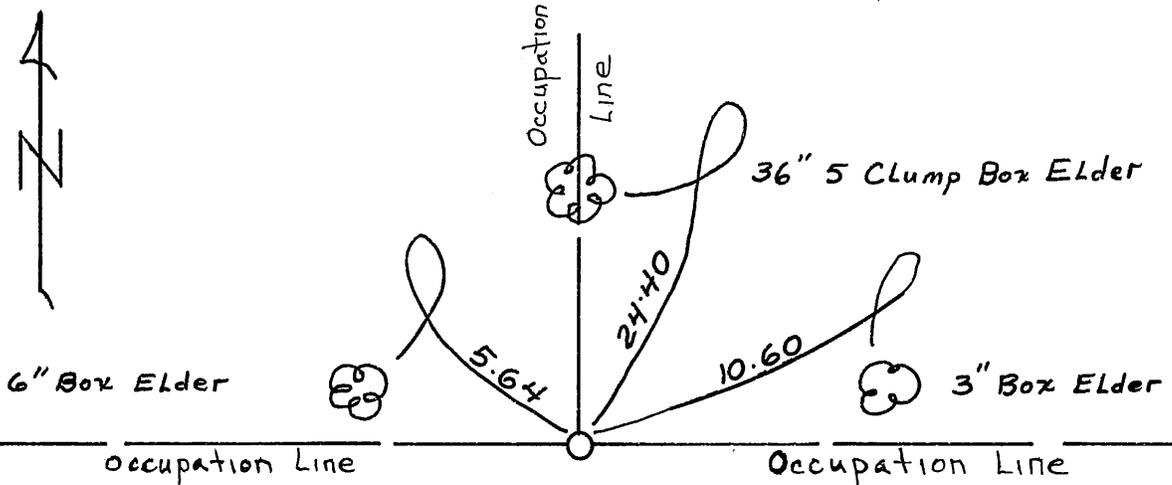

1 1/2 feet
 hole
 27
 NE NW
 20/112
 34-36-29

173396

I hereby certify that the above
 is true and correct and that I am
 a registered Land Surveyor under
 the laws of the State of Minnesota.

Dan J. Allen

Minn. Registration No. 10461

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument
 was filed for record in this office on the
16th day of May, 19 85.
 at 11:00 A.M.

Alice C. Engelmeier
 County Recorder

By _____ Deputy.