

Certified, Filed and or Recorded on  
Feb. 24, 2010 AT 01:05PM


Signed: OK  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 5, Township 36 North, Range 29 West, Fourth Principal Meridian,  
Benton County, Minnesota.

At this corner location shown on the sketch:

- On 2/19/2010 found a CAST IRON MONUMENT
- left monument as found     lowered monument     removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

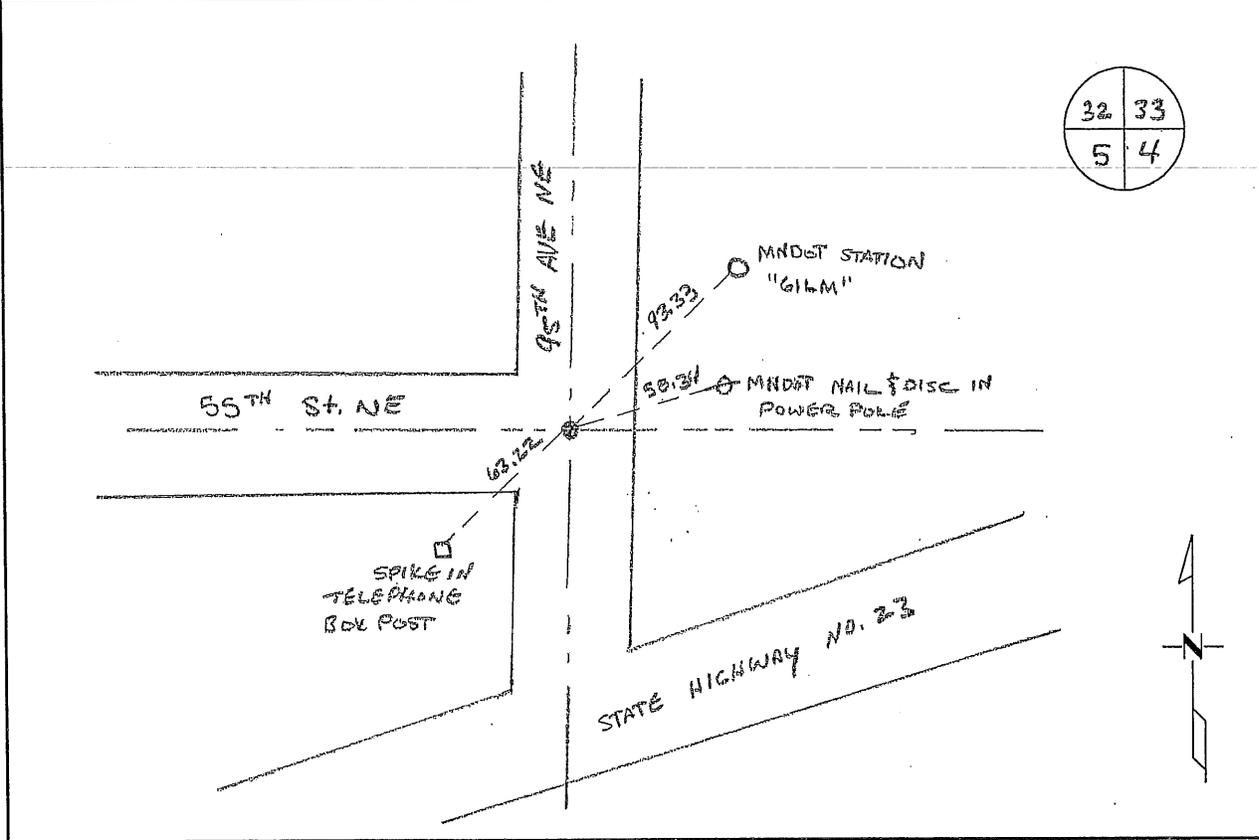

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a Licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy Benton County Surveyor  
License No. 45873

Date: 2/22/2010

Benton County Surveyor's Office  
 Nathan H. Carlson, Deputy County Surveyor  
 Minnesota License No. 45873

**Statement of Evidence:****K052**

Northeast Corner of Section 5, Township 36 North, Range 29 West, St. George Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1849 Original General Land Office survey established this corner set a wood post at this location and bearing trees were recorded.
- |           |        |          |             |        |          |
|-----------|--------|----------|-------------|--------|----------|
| 12" W Oak | N 30 E | 39 links | 14" W Oak   | N 65 W | 19 links |
| 6" Elm    | S 16 W | 38 links | 6" Ironwood | S 86 E | 17 links |
- No Date County Surveyor's Record Book 1, page 93, notes the following reference ties to an oak stake and rock:
- |    |    |      |    |    |      |
|----|----|------|----|----|------|
| TP | SW | 57.4 | TP | NW | 96.4 |
|----|----|------|----|----|------|
- Page 525 contains additional ties:
- |                             |               |        |    |       |
|-----------------------------|---------------|--------|----|-------|
| 4.0 foot diameter flat rock | 7.3 feet east | 6" Oak | NE | 42.05 |
| Fen. P.                     | NW            | 38.5   |    |       |
- 1894 County Road Book, page 84, shows road surveyed by Felix Parrent, County Surveyor, on east-west town line. Gives distance of 80.26 chains for the north line of Section 5.
- 1912 County Engineer's Notebook 2, page 49, contains a survey for State Road No. 9 by M. J. Cleveland. Ties:
- |      |    |     |      |    |     |
|------|----|-----|------|----|-----|
| T.P. | NW | 49' | T.P. | NE | 41' |
|------|----|-----|------|----|-----|
- 1913 County Surveyor's Record pages 34 and 35: J. A. Stanton found corner preserved by Mr. Galmault from original survey.
- 1949 County Highway Engineer's Notebook No. 169 contains road survey for CAR 37 running from south to north on the section line. Corner is shown marked by a stake and stone in the center of road with town road west. Ties are the same as listed in County Surveyor's Record Book 1, page 525:
- |    |    |      |    |    |       |
|----|----|------|----|----|-------|
| TP | SW | 58.4 | TP | NW | 48.55 |
|----|----|------|----|----|-------|
- (Later notation shows same ties to concrete R/W monuments as below by West.)
- 
- 1949 C.H. West, LS 932, found a stone and rotted oak fence post. He replaced it with a 8" X 30" round concrete monument with the following reference ties
- |                        |    |       |
|------------------------|----|-------|
| 2 ½" X 5" R/W Monument | NE | 118.8 |
| 2 ½" X 5" R/W Monument | SW | 103.1 |
- Alignment map for TH 23 shows corner in north-south road and road west 114.0 feet north of the centerline of TH 23. (County Highway notebook 1, page 67 shows same ties.)
- 1978 Ronald Engelmeyer, LS 13334, found a ½" square iron pin and left it as was. He filed a Certificate of Location (#151557). A tie of 118.43 feet is shown to a 3" diameter R/W monument to the NE.
- 2003 Westwood Professional Services, Inc. found a hub and spike and located it by GPS.  
**Note: Need to check for previous ties and monument. Do not use coordinates without verification.**  
 County Coordinates obtained by GPS to Spike  
 NAD 83 (1996 Adjustment)  
 N- 132221.639  
 E- 521134.121
- 2004 MN/DOT found 1949 concrete monument.  
 County Coordinates obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N- 132221.637  
 E- 521133.860
- 2010 Westwood Professional Services, Inc. found a CIM, established reference ties and verified the 2004 MnDOT coordinates.

Index No. \_\_\_\_\_

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 5, Township 36, Range 29, \_\_\_\_\_ P.M.  
STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On 3-14-78 I I found a 1/2" square iron pin, found in place  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a left as it was  
DATE

## SKETCH OF REFERENCE TIES



refer to next pages

Statement of evidence relative to this corner location is on back of page. County Recorder

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald Engelmeyer  
SIGNATURE DATE

Registration No. 13334

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS  
County of Benton


I hereby certify that this document was filed in the Reg. of Deeds office at 9 A: .M. on the 21 day of February A.D., 19 79

Register of Deeds F. A. Johnson  
By County Recorder, Deputy  
DOCUMENT NO 151557

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 14<sup>th</sup> day of MARCH, 1978  
 I did FIND the NORTHEAST corner of Section 5,  
 Twp. 36, Rg. 29, BENTON County, Minnesota, which  
 was evidenced by 1/2" SQUARE IRON PIN FOUND IN PLACE

I further certify that in order to perpetuate said corner I did  
 at the exact location thereof place a permanent marker consisting  
 of LEFT AS IT WAS. and that  
 I did establish witness or reference monuments as shown below:

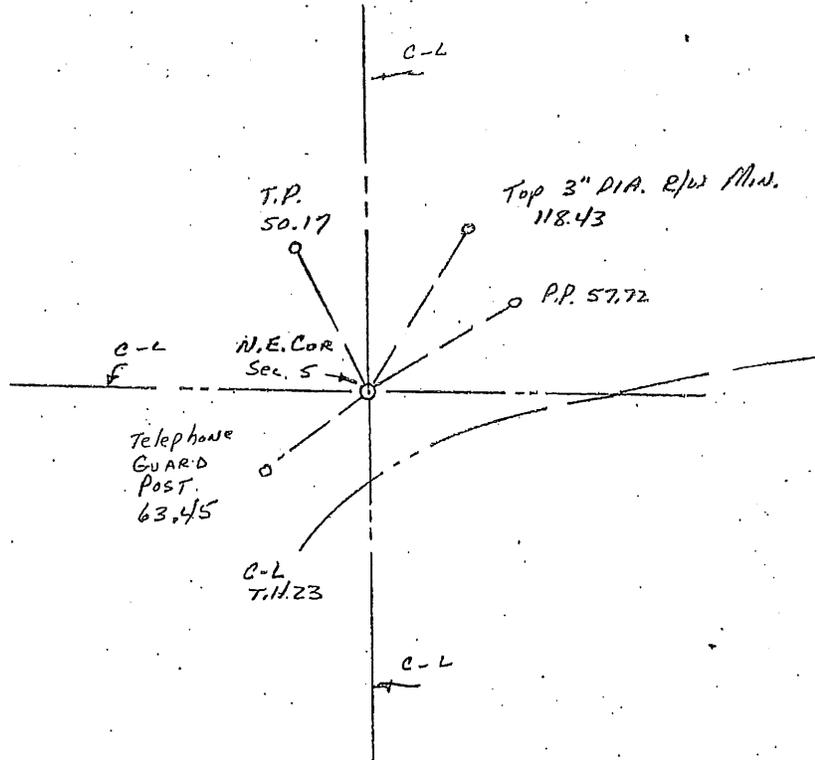

151557

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

*Russ Engel*

Minn. Registration No. 13334

County Recorder  
 Office of the ~~Register~~ of Deeds,  
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 21st day of February, 1979. 9.2.79

*J. Johnson*  
 Register of Deeds ~~County Recorder~~  
 By \_\_\_\_\_ Deputy.