

Certified, Filed and or Recorded on  
Dec. 16, 2008 AT 01:47PM


Signed: BW  
MARILYN J NOVAK G V T  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 9, Township 36N, Range 29W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/14/08 found a CAST IRON MONUMENT DOWN 0.2'
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

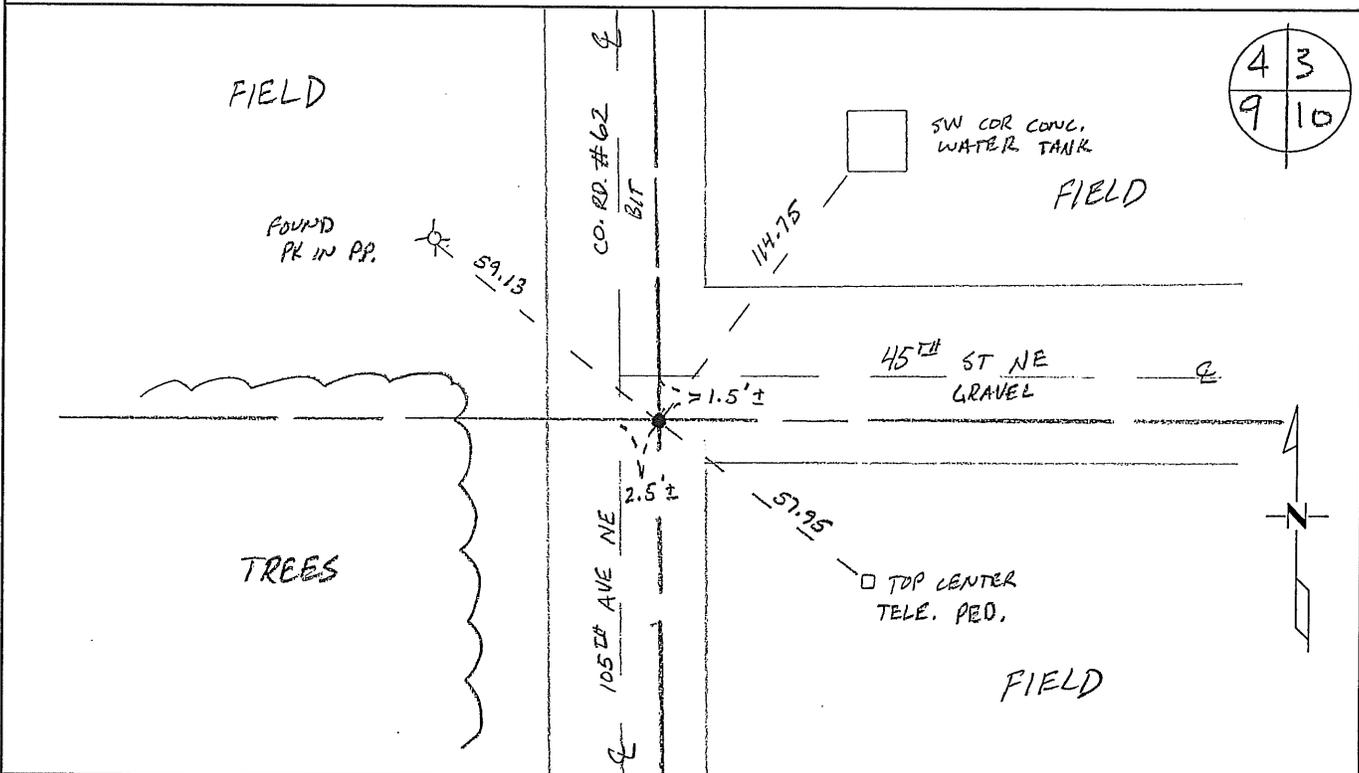

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oley  
Deputy Benton County Surveyor  
License No. 45872

Date: 11/06/2008

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

**Statement of Evidence:**

K092

Northeast Corner of Section 9, Township 36 North, Range 29 West, St. George Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey set a wood post with bearing trees:
- |           |          |          |
|-----------|----------|----------|
| 18" Maple | N 26 ½ W | 40 links |
| 20" Elm   | N 67 E   | 72 links |
- 1929 County Surveyor's Record Book 1, page 89 and Record Book A, Map No. 50 shows H.G. Elletson surveyed Section 3, doing a complete section subdivision with all 1/16<sup>th</sup> corners set. The survey notes an iron monument at the corner with ties:
- |         |    |      |
|---------|----|------|
| 12" Oak | SW | 54.4 |
| TP      | SE | 76.6 |
- He notes a distance of 2656 feet to the East ¼ corner Sec 4 and a distance of 2627.8 feet to the North ¼ corner Sec 10. (Notes in Notebook 48)
- 1931 County Engineer's notebook 61 contains road survey that shows corner marked by an iron pipe with same ties as in 1929.
- 1957 County Surveyor's Record Book 1, page 101 notes an iron pin over the iron pipe with the following reference ties
- |                        |    |        |
|------------------------|----|--------|
| PP                     | NW | 59.4   |
| TP                     | SE | 73.5   |
| SW Cor Conc Water tank | NE | 114.75 |
- 1966 County Engineer's notebook No. 2, page 17, notes J. Kotsmith found iron axle at the corner.
- 1977 Paul Wellen, LS 10461, found an iron monument at the centerline of roads north/south/east. He filed a Certificate of Location (#147246). Ties fit 1957 as:
- |                        |    |        |
|------------------------|----|--------|
| PP                     | NW | 59.4   |
| SW Cor Conc Water tank | NE | 114.75 |
- 2003 Barry Dorniden, LS 23044, reported finding a PK nail at the corner.
- 2004 County Coordinates Obtained by GPS to CIM  
 NAD 83 (1996 Adjustment)  
 N- 127021.454  
 E- 526828.420
- 2008 The County Surveyor's Office searched and found the cast iron reported at the same position as in 2004, lying 1.5 ft± south of the centerline of east-west 45<sup>th</sup> St. N.E. and 2.5 ft. ± east of the centerline of north-south 105<sup>th</sup> Ave. N.E. The position fits Elletson's 1929 ties to the E ¼ Cor. of Sec. 4 (2654.30 ft. vs. 2656 ft.) and ties to the N ¼ Cor. of Sec. 10 (2629.37 ft. vs. 2627.8 ft.). The position agrees with occupation and past measurements and is accepted as the best evidence. Ties were updated.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N. E. \_\_\_\_\_ Corner of Section 9, Township 36, Range 29, \_\_\_\_\_ P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

## SKETCH OF REFERENCE TIES



Filed under N.W. Corner Section 10, T36 R29

Certificate #147246

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

\_\_\_\_\_  
SIGNATURE DATE

Registration No. \_\_\_\_\_

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

## OFFICE OF THE REGISTER OF DEEDS

County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Should BE N.E. corner Section 9 T36 R29

Index No. \_\_\_\_\_

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHWEST Corner of Section 10, Township 36, Range 29, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 6-23-77 found a IRON MONUMENT  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

## SKETCH OF REFERENCE TIES

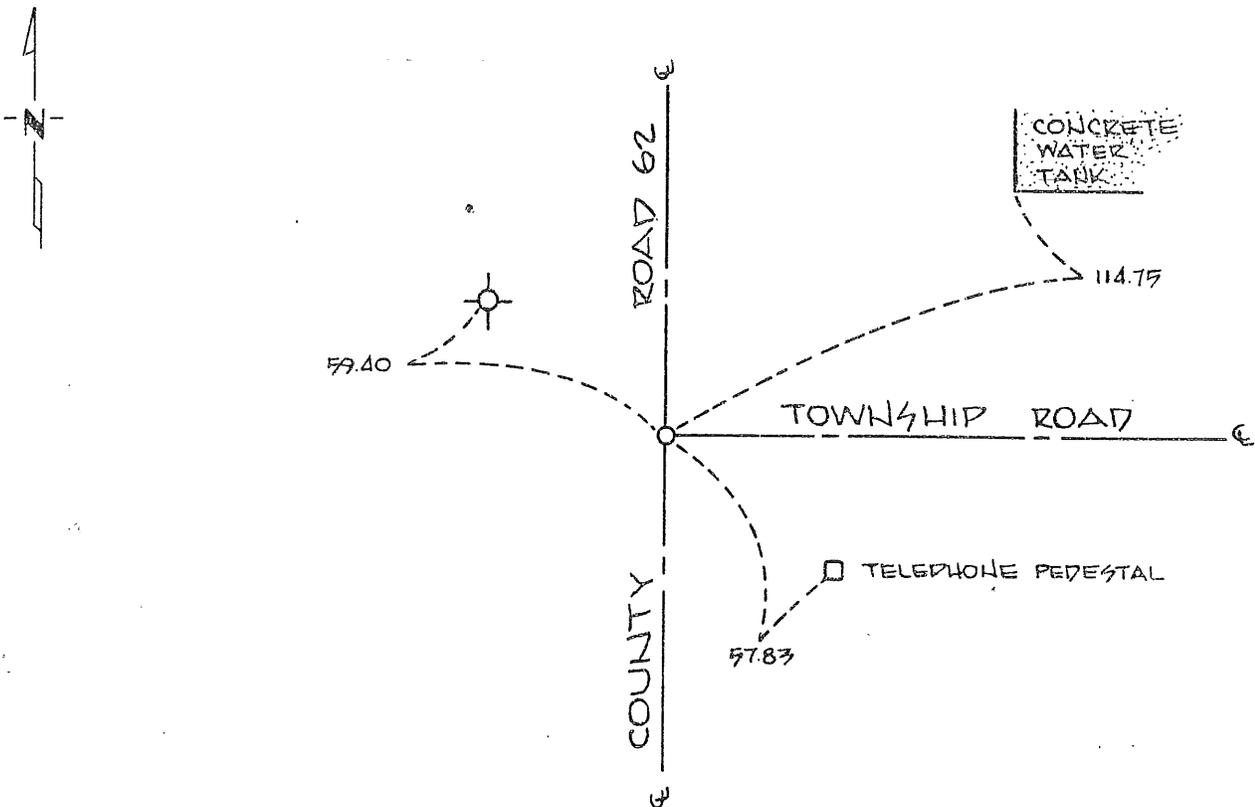

Statement of evidence relative to this corner location is on back of page. 147246

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul Miller 1/3/78  
SIGNATURE DATE

Registration No. 10461  
 Land Surveyor  Professional Engineer

OFFICE OF THE REGISTER OF DEEDS  
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 4 P. M. on the 12 day of \_\_\_\_\_ A.D., 1978

Register of Deeds W. A. Johnson