

Certified, Filed and or Recorded on
Nov. 07, 2008 AT 02:26PM



Signed: M
MARILYN J NOVAK
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 17, Township 36N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/14/08 found a CAST IRON MONUMENT UP 1.0'
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

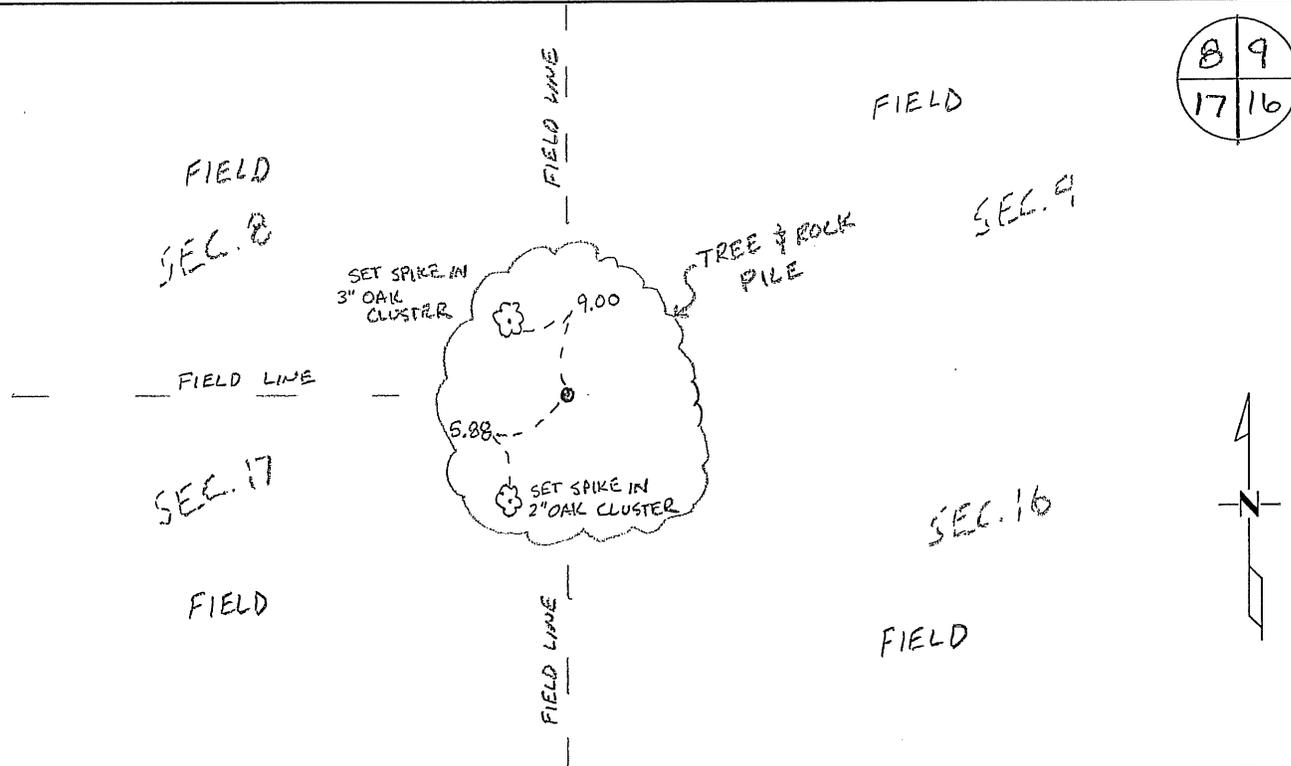

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oles
Deputy Benton County Surveyor
License No. 45872

Date: 11/06/2008

PAGE 1 OF 2

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

K172

Northeast Corner of Section 17, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post with bearing trees noted as:

5" Blk Cherry	N 30 1/2 W	18 links
5" Poplar	N 35 1/2 E	17 links

1994 William Lunser, LS 9394, set a cast iron monument at the intersection of downed fence lines from the north and west. He filed a Certificate of Location (#234169). Statement includes testimony of landowner that had witnessed an iron pin at the corner before the area had been bulldozed. The Certificate shows a distance of 2612.98 feet to the East 1/4 corner of Sec 17.

2002 No other record history found on this corner in the Benton County records.

County Coordinates computed from Lunser's certificate (for reference use only)

NAD 83 (1996 Adjustment)

N-121751.0

E-521636.0

2004 MN/DOT found CIM.

County Coordinates Obtained by GPS

NAD 83 (1996 Adjustment)

N- 121751.333

E- 521636.058

2008 The County Surveyor's Office searched and found a cast iron monument approximately 1.0 foot above ground at the intersection of north, south, and west field lines. Position agrees with 1994 distance to East corner by Lunser. Surveyor accepts Lunser's position and set new ties.

County Coordinates Obtained by GPS

NAD 83 (1996 Adjustment)

N- 121751.245


E- 521636.201

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST corner of Section 17, Township 36, Range 29, 4th P.M.
Benton County, Minnesota.

On July 12, 1994, A Cast Iron Monument (C.I.M.) was placed at this location.

SKETCH OF REFERENCE TIES

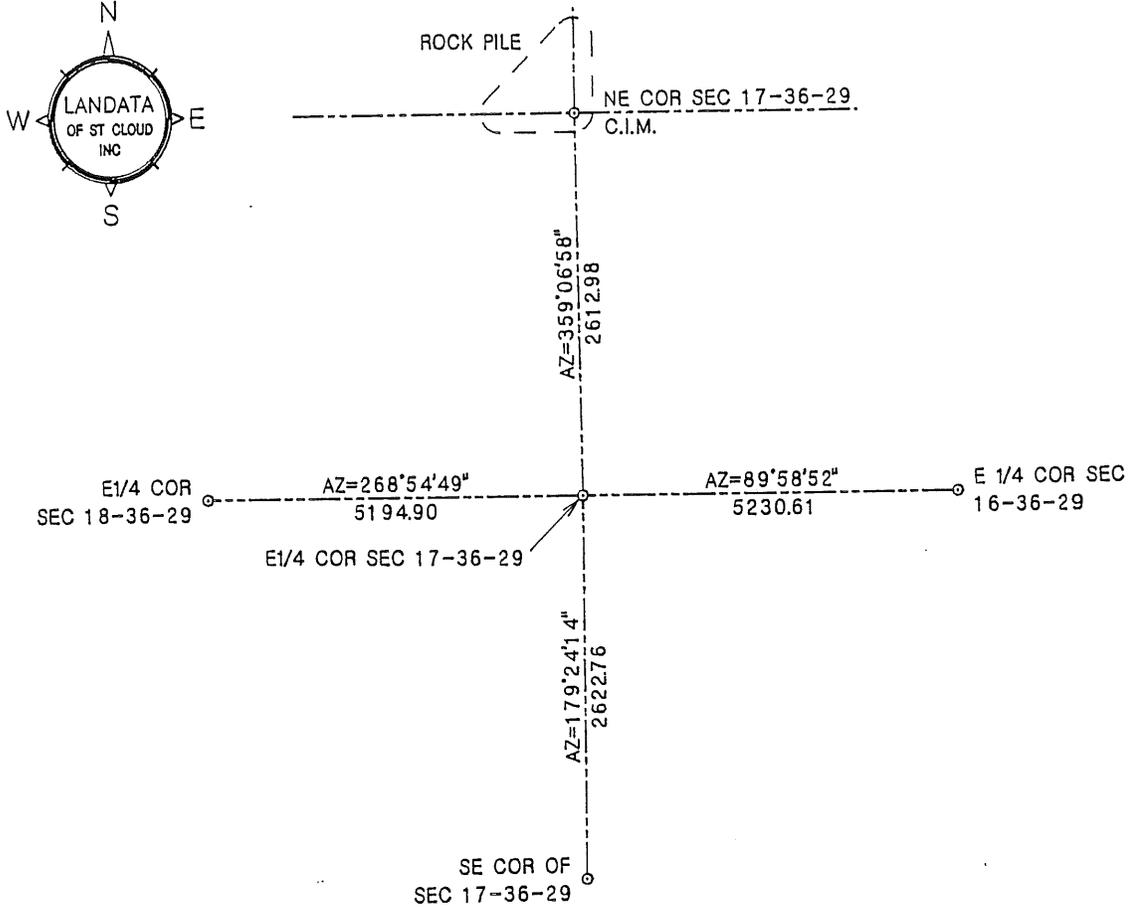

Statement of evidence relative to this corner location on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William F. Lunser 3/13/96
William F. Lunser, L.S. Date

Mn Reg No 9394

FB; 144/10 DISC; 14

OFFICE OF THE COUNTY RECORDER
Benton County, Minnesota

I hereby certify that this document was filed in this office at ___:___ M. on the ___ day of _____, 19___.

County Recorder _____

By _____ Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

No records were found to indicate use or remonumentation of this corner after its original placement by the U.S. Government Survey.

Tom Legatt, land owner, stated that he had witnessed an iron pin at this location and that line fences once ran north and west from the corner. Legatt further stated that, having purchased the land to the northwest, fences, field stone and trees were bulldozed onto a pile at this location.

We were unable to locate the pin. However, by removing rocks from the pile traces of the original wire fence could be seen running west and north, at the vertex of which the C.I.M. was placed.


William F. Lunser, L.S.

2 3 4 1 6 9

DENVER COUNTY RECORDER
DENVER COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

APR 10 2 34 PM '96

ALICE C. ECKELMEYER
COUNTY RECORDER

BY mn DEPUTY xm