

Certified, Filed and or Recorded on  
Oct. 14, 2008 AT 10:12AM


Signed: CK  
MARILYN J NOVAK G V  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 20, Township 36N, Range 29W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/09/08 found a 1/2" IRON PIPE
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

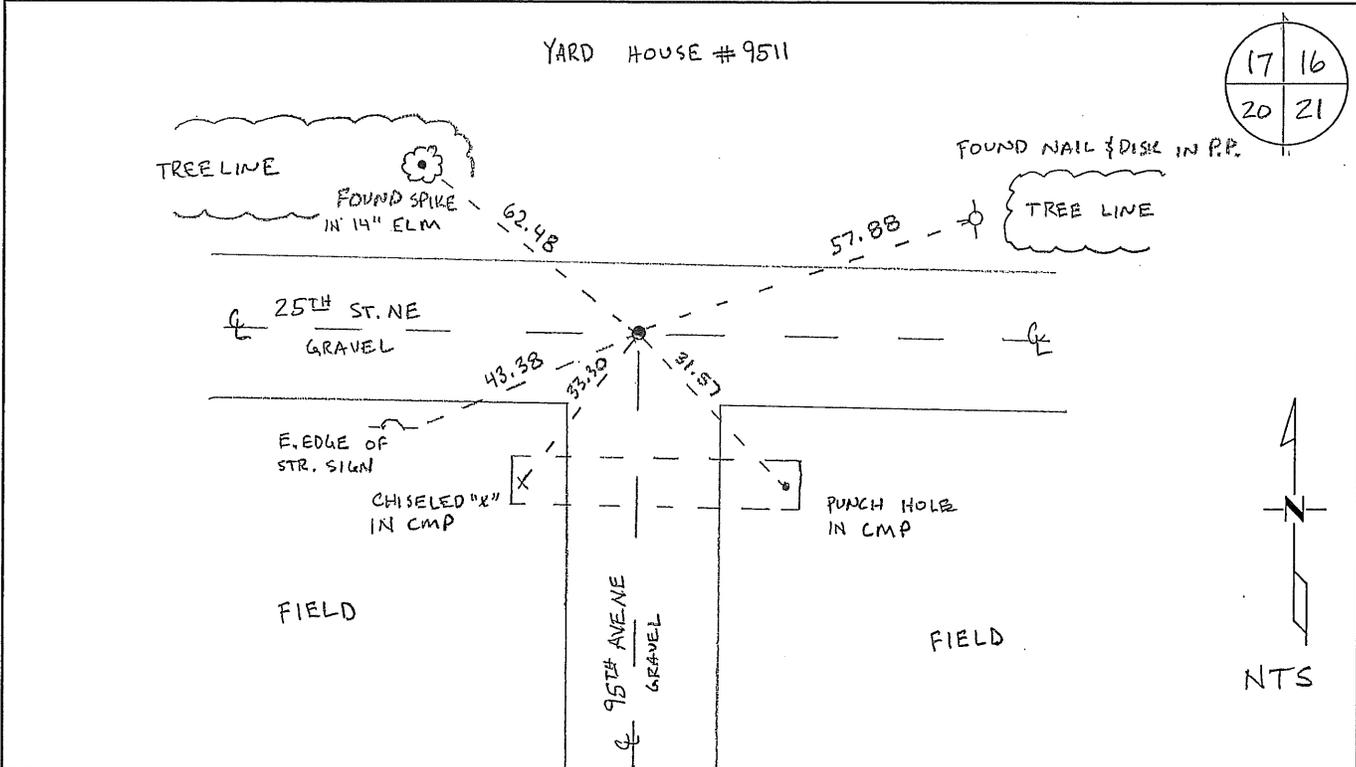

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jason W. Oly  
Deputy Benton County Surveyor  
License No. 45872

Date: 10-13-2008

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

**Statement of Evidence:**

K202

The Northeast Corner of Section 20, Township 36 North, Range 29 West, St. George Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- |          |          |          |
|----------|----------|----------|
| 5" Aspen | N 14 W   | 20 links |
| 5" Aspen | S 85 ½ W | 15 links |
- 1992 David Regan, LS 12236, set a ½" I.M. at the centerline of roads east/west/south. He filed a Certificate of Location (#231253).
- 1994 William Lunser, LS 9394, notes per Doc. No. 234170 a distance of 2622.76 feet to the East ¼ corner Sec 17.
- 2002 No other resurvey information was found on this corner in the Benton County Surveyor's records.
- 2008 The County Surveyors Office searched and found a ½" iron pipe as set by Regan in 1992. Said monument falls on centerline intersections of east-west road (25<sup>th</sup> St. N.E.) and south road (95<sup>th</sup> Ave. N.E.). Surveyor accepts Regan's position and updated ties.

County Coordinates Obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-116515.479  
 E-521688.246

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 20, Township 36, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE \_\_\_\_\_  
and \_\_\_\_\_
- left monument as found,  lowered monument,  removed monument (explain)
- On 7/29/92 placed a 1/2" Iron monument at centerline of roads East-West  
DATE \_\_\_\_\_  
and South \_\_\_\_\_

### SKETCH OF REFERENCE TIES

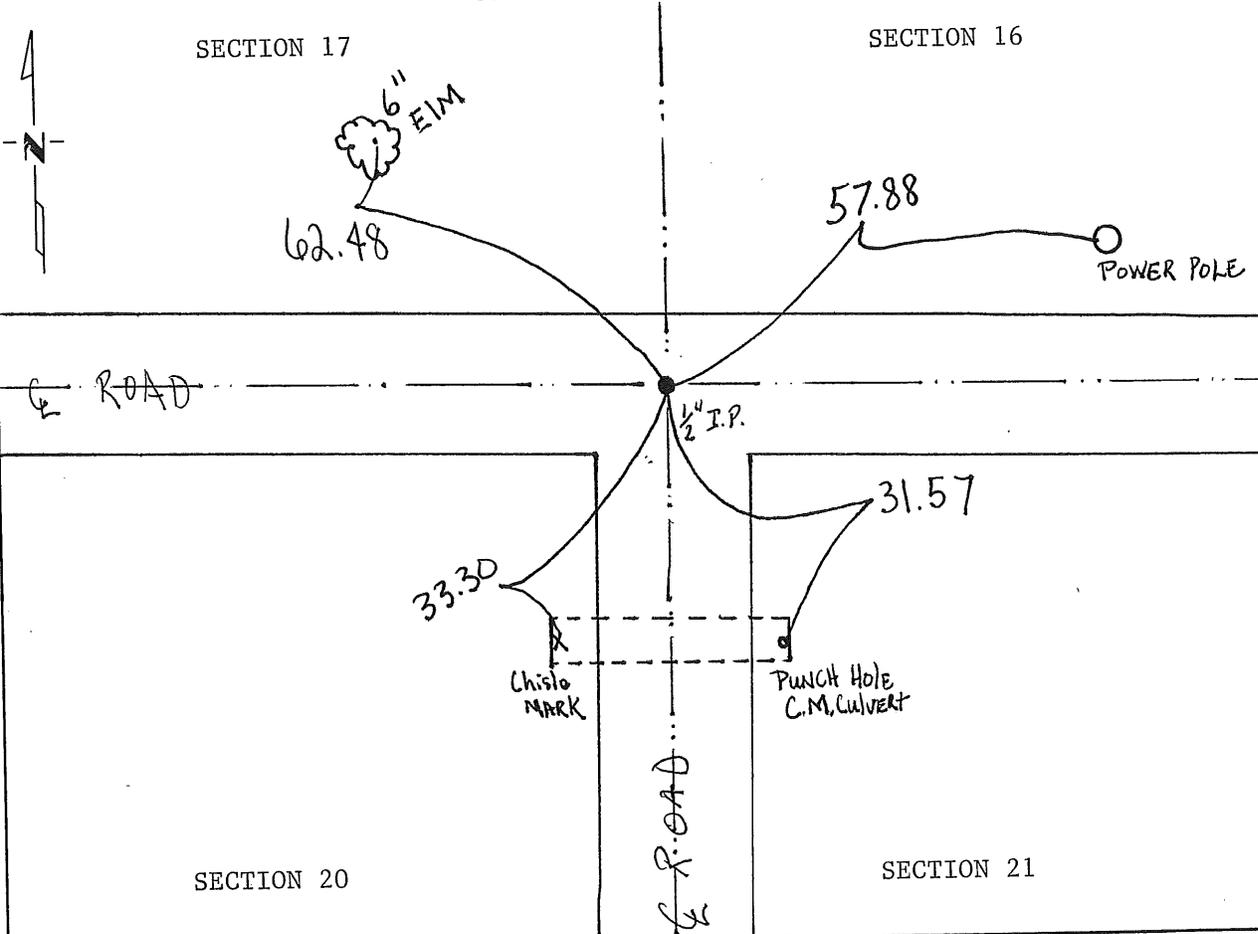

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David P. Regan 3/27/95  
SIGNATURE DATE

Registration No. 12236

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS  
County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

The G.L.O. survey was done in 1855 by Oscar Davis.

County Surveyors records were searched with no reference to this corner.

On 7/92, Regan Land Surveyors, Inc. searched and dug the area and set a 1/2" iron pipe at the intersection of centerline roads East-West and South.

231253

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

OCT 20 3 03 PM '95

ALICE G. ENGELMEYER  
COUNTY RECORDER

BY *MW* DEPUTY