

Certified, Filed and or Recorded on
Nov. 07, 2008 AT 02:12PM


Signed: JN
MARILYN J NOVAK
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 22, Township 36N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/13/08 found a CAST IRON MONUMENT DOWN ±0.9'
EXCAVATED AND FOUND 3/4" GAS PIPE 4 1/2' BELOW CAST IRON MONUMENT.
- left monument as found lowered monument removed monument (explain)
- On 11/05/08 placed an 1/2" IRON PIPE CAPED 19.552 ±0.5' BELOW
GRADE IN PLACE OF C.I.M.

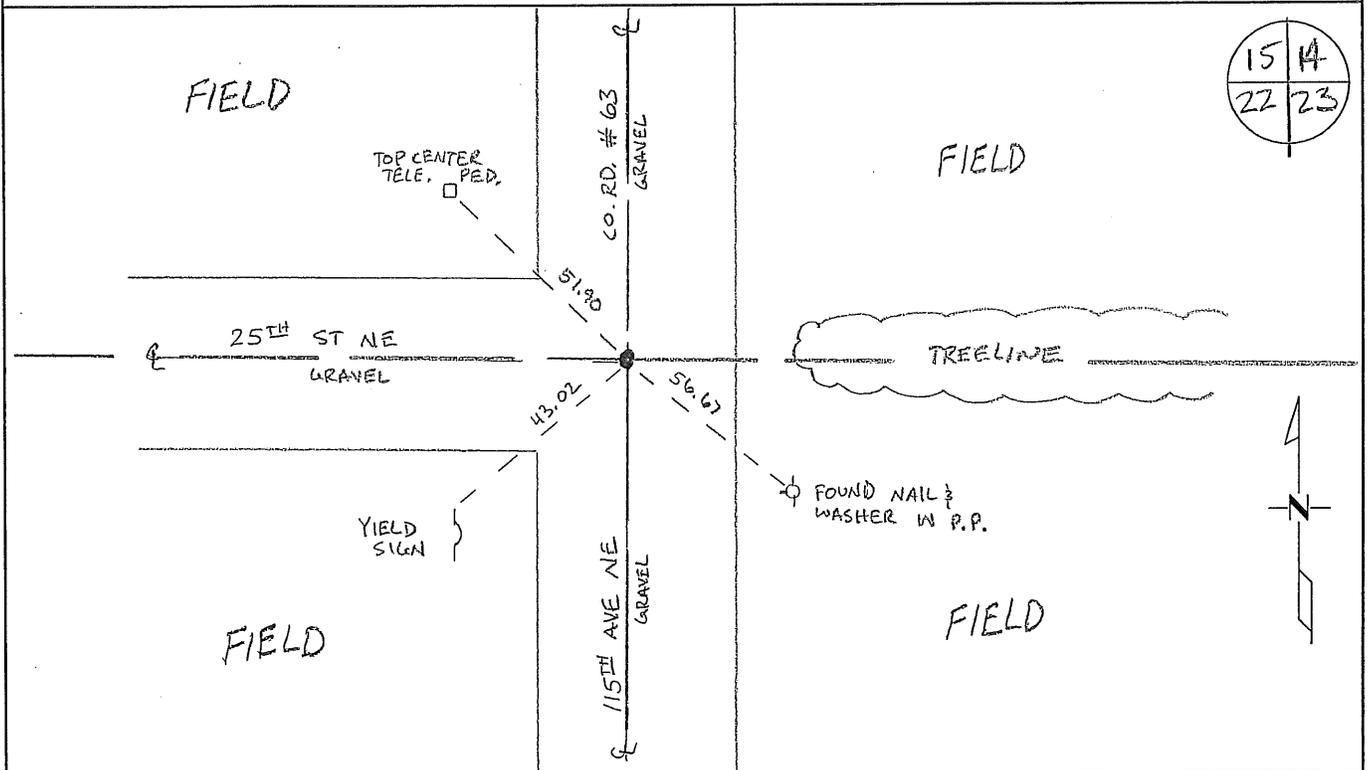

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oley
Deputy Benton County Surveyor
License No. 45872

Date: 11/06/2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

K222

Northeast Corner of Section 22, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

12" Aspen	N 45 1/2 W	30 links
12" Blk Ash	S 50 3/4 E	45 links

1898 County Road Book, page 141, shows road surveyed by Felix Parrent, County Surveyor, north from this corner.

1907 County Road Book, pages 2 and 3, contains a road survey by Felix Parent, County Surveyor, for State Road No. 1. Survey shows corner found "drove piece of gas pipe, 1 1/4" x 16", in place of old post" and road run north-south. Notes existing road west at the corner.

1912 County Engineer's Notebook 2, page 33, contains a road survey by M. J. Cleveland for road running north and south. Notes show corner marked by "Parent placed gas pipe".

1962 County Surveyor's Record Book 1, page 27, notes a sandstone (older record in County Engineer's Notebook No. 1, probably 1912 or earlier notes stone 1 1/2 links east-west and 2 links north-south in size) at the corner. An iron was set in 1962 at the corner location with the following reference ties.

PP	SE	56.6
Tele Ped	NW	40.25

Note: Same ties listed in 1969.

1982 On July 19, 1982 David Regan, LS 12236, found a 1" solid pin at the centerline of roads north/south/west. He set cast iron monument over the iron and filed a Certificate of Location (#163370). Tie to PP checks with 1962 tie.

2001 On April 15, 2001 Westwood Professional Services, Inc. found a cast iron monument at the intersections of County Road 63 (running north and south) and 25th Street NE (from the west).

County Coordinates Obtained by GPS to CIM
 NAD 83 (1996 Adjustment)
 N-116638.90
 E-532194.13

2008 The County Surveyor's Office searched and found Regan's 1982 cast iron monument. The County Highway Dept. excavated a 12'x16'x5' hole in north-south County Road 63 and found the gas pipe set by Parent "*..in place of old post*" in 1907. Said gas pipe falls under the cast iron monument. The sandstone monument referenced in 1962 was not recovered. During excavation the cast iron monument was removed and replaced by a 1/2" x 14" iron pipe capped 19552. Ties were updated. Coordinates obtained agree with those reported by Westwood Professional Services, Inc. in 2001.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 22, Township 36, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 7/19/82 found a 1 inch solid pin in center line of Co. Rd. #63
DATE
north-south and center line of Twp. Rd. to west
 left monument as found, lowered monument, removed monument (explain)
- On 7/19/82 placed a Benton County cast iron monument over solid
DATE
iron pin

SKETCH OF REFERENCE TIES

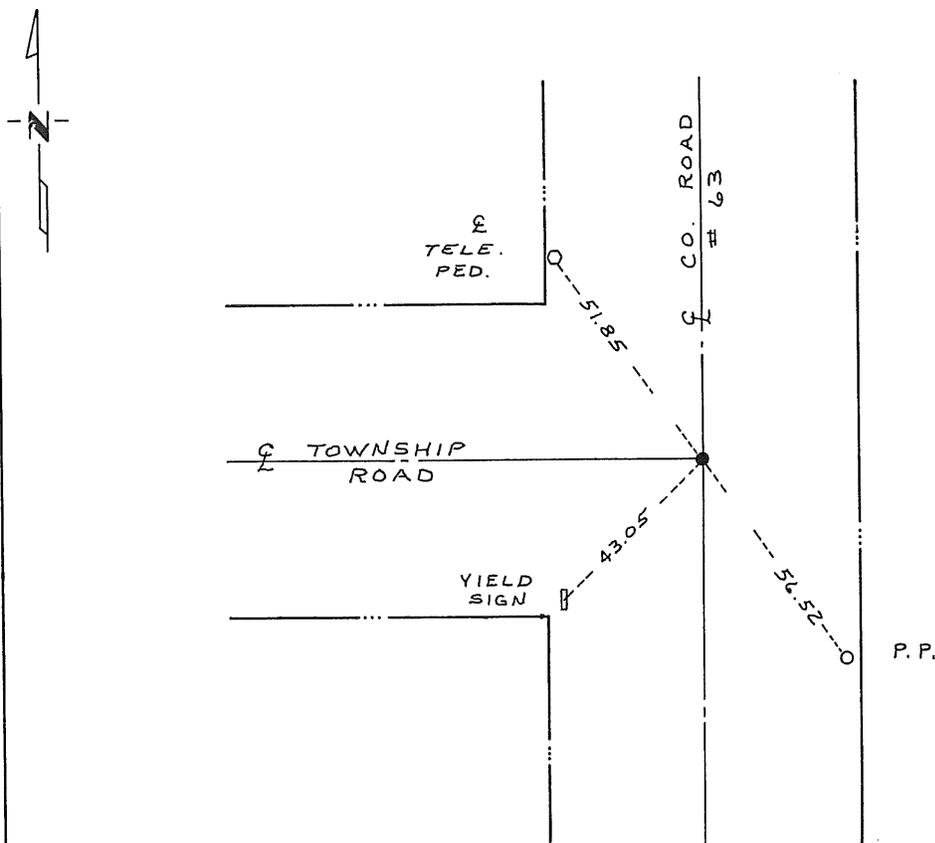

Statement of evidence relative to this corner location is on back of page. **163370**

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David P. Regan 9/1/82
SIGNATURE DATE

Registration No. 12236

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

County Recorder
OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 11 A.M. on the 18th day of October A.D., 1982

County Recorder
Register of Deeds F.A. Johnson

By _____, Deputy

DOCUMENT NO. _____

CERTIFICATE OF REPLACING SECTION CORNER

Corner to Sec. 19-24-25-30 T. 36N. R. 28E. 29W.

State of Minnesota }
County of Benton } ss.

I hereby certify that on 10th day of November 1949

I found the N.E. Corner to Sec. 25 Twp. 36N. Rge. 29W.

which was evidenced by a boat/spike

and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a permanent marker consisting of a 8" x 30" round precast concrete monument with cap

I further certify that I established 2

reference or witness monuments consisting of 8 x 30 round precast concrete monuments.

which reference or witness monuments are located in the manner following:

N.W. 98.0 feet and N.E. 98.0 feet, which is approximately 75 feet from the center line of T. H. 95.

All reference markers are level with ground and guarded with steel posts.

Dated at St. Cloud Minn., this 3rd day of April 1950

Lon West
Land Surveyor Reg # 932

OFFICE OF REGISTER OF DEEDS
County of Benton } ss.

I hereby certify that the within instrument was filed in this office for record on the 9

day of Feb A. D. 1951 at 2 o'clock P. M.

Thos Niedzielski
Register of Deeds
By Deputy

CERTIFICATE OF REPLACING SECTION CORNER

Corner to Sec. 23-24-25-26 T. 36N. R. 29W.

State of Minnesota }
County of Benton } ss.

I hereby certify that on 9th day of November 19 49

I found the N.E. Corner to Sec. 26 Twp. 36N. Rge. 29W.

which was evidenced by a boat spike

and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a permanent marker consisting of a 8" x 30" precast concrete monument with cap.

I further certify that I established 2 reference or witness monuments consisting of 8" x 30" precast concrete monuments

which reference or witness monuments are located in the manner following:

S.W. 80.0 feet and S.E. 79.9 feet, which is approximately 75 feet from the center line of T. H. 95.

All reference markers are level with ground and guarded with steel posts.

Dated at St. Cloud Minn., this 3rd day of April 19 32

James Westland Surveyor Reg # 932

OFFICE OF REGISTER OF DEEDS
County of Benton } ss.

I hereby certify that the within instrument was filed in this office for record on the 9th day of Feb A. D. 19 51 at 2 o'clock P. M.

Thomas Niedzielski Register of Deeds

By Deputy

CERTIFICATE OF REPLACING SECTION CORNER

Corner to Sec. 22-23-26-27 T. 36N. R. 29W.

State of Minnesota }
County of Benton } ss.

I hereby certify that on 9th day of November 19 49

I found the N.E. Corner to Sec. 27 Twp. 36N Rge. 29W
which was evidenced by flat rock with X inscribed

and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a
permanent marker consisting of 8" x 30" round precast concrete monument with cap.

I further certify that I established 2
reference or witness monuments consisting of 8" x 30" round precast concrete monuments.
which reference or witness monuments are located in the manner following:

S.W. 96.6 feet and S.E. 98.3 feet; which is approximately 75 feet from center
line of T. H. 95.

All reference markers are level with ground and guarded with steel posts.

Dated at St Cloud Minn., this 3rd day of April 19 50

Handwritten signature of Surveyor and Reg #932

OFFICE OF REGISTER OF DEEDS }
County of Benton } ss.

I hereby certify that the within instrument was filed in this office for record on the 9th
day of Feb A. D. 19 51 at 2 o'clock P. M.

Handwritten signature of Register of Deeds

By Deputy