

Certified, Filed and or Recorded on
Oct. 07, 2008 AT 02:46PM


Signed: BW
MARILYN J NOVAK
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 24, Township 36 N., Range 29 W.
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/01/08 found a CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

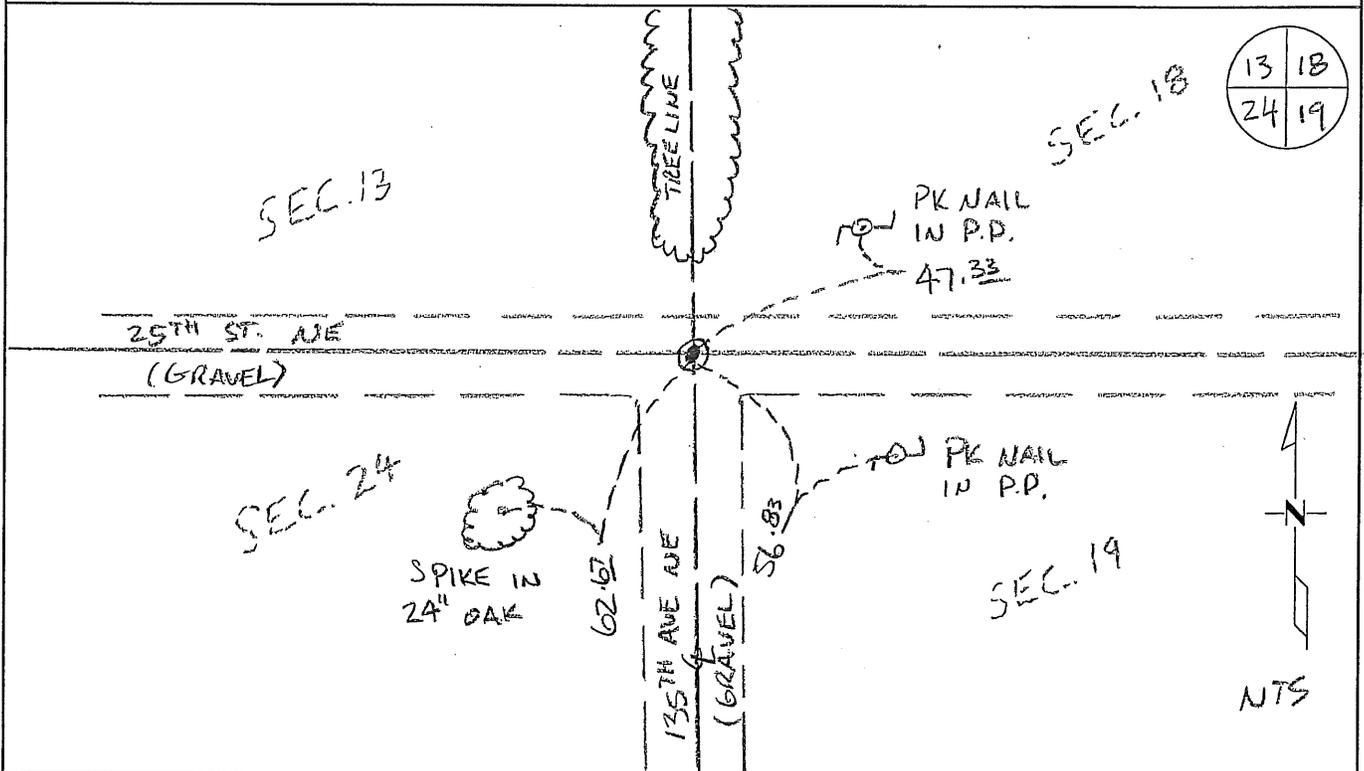

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Gas W. O'G
Benton County Surveyor
License No. 19552

Date: 10/06/08

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence

K242

Northeast Corner of Section 24, Township 36 North, Range 29 West, St. George Township, 4th
 Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded:
- | | | | |
|-------------|--------|----------|----------|
| 10" Blk Ash | S 22 W | 24 links | |
| 14" W. Oak | S 48 E | | 19 links |
| 8" W. Ash | N 40 W | 35 links | |
| 6" W. Ash | N 51 E | | 13 links |
- Line trees are noted as an 18" Basswood, North, 11.18 chains and a 6" Tamarack, South, 16.11 chains
- 1915 County Surveyor's Record Book 1, pages 45 and 46, and Record Book A, Map No. 11, shows that J.P. Soderstrum did a survey of Section 19. The notes state that he set a post for the corner from testimony of old settlers and this location checks with fence lines and centerline of road. He made the following reference ties.
- | | | | |
|-----------|------------|-----------|----------|
| W. Oak | N 22 1/4 W | 158 links | |
| Oak Stump | N 59 E | | 75 links |
- 1926 County Surveyor's Record Book 1, page 131, and County Engineer's Notebook No. 44, page 74, H. G. Elletson notes an iron pipe at the corner with the following reference ties.
- | | | | |
|------------|--------|------------|--|
| 15" W. Oak | 105.0' | N 72 1/4 W | |
| Cor FP | 43.6' | SW | |
- 1994 Kevin Festler, RLS 22702, found a cast iron monument at the corner location. He filed a Certificate of Location (#226909).
- 1995 Comstock and Davis performed GPS work under contract with Benton County and Coordinates Obtained by GPS NAD 83 (1986 Adjustment) to a CIM:
- | | |
|----|------------|
| N- | 116745.571 |
| E- | 542718.636 |
- 2002 On December 4, 2002 Westwood Professional Services, Inc. found a cast iron monument at the intersection of Township Road 49 (running east and south) and 25th Street NE (running west) and 1 of Festler's ties.
 County Coordinates Obtained by GPS to CIM
 NAD 83 (1996 Adjustment)
 N-116745.771
 E-542718.295
- 2008 The County Surveyor's Office searched and found a cast iron monument that fits Festler's 1994 ties. Said position agrees with occupation lines and is accepted as the best evidence. The Surveyor updated ties. Westwood's 2002 coordinates were verified with GPS.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast _____ Corner of Section 24, Township 36, Range 29, 4th P.M.
STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 8-2-94 found a Cast Iron monument
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

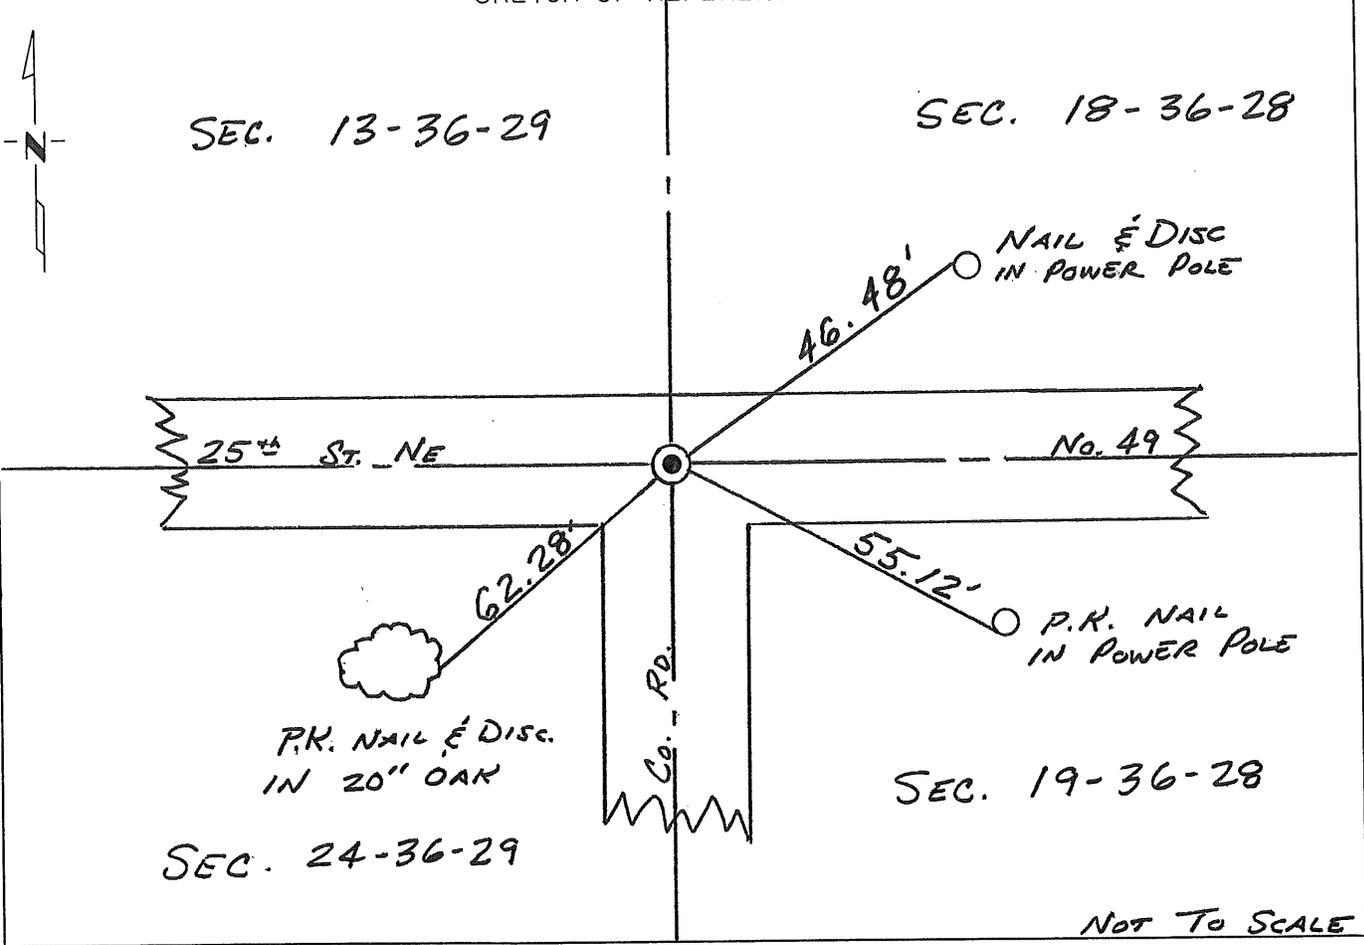

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] Nov 14, 1994
SIGNATURE DATE

Registration No. 22702

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

The northeast corner of Section 24, Township 36, Range 29, 4th Principal Meridian, Benton County, Minnesota, was set under the Public Land Survey as a post with 3 bearing trees. No trace of post or bearing trees now exists.

A search by Benton County Highway personnel of available county survey records revealed no additional information on this corner.

On Aug. 2, 1994, Comstock & Davis, Inc., while remonumenting section corners for the purpose of G.P.S. work for Benton County found a cast iron monument and the northeast corner position of Sec. 24, Twp. 36, Rng. 29. Comstock & Davis, Inc. compared the location of the found cast iron monument to the original US Government Survey and found the position to be within reason of the Public Land Survey records. Comstock & Davis, Inc., accepted the found cast iron monument as the position for the northeast corner of Sec. 24. Refer to Job No. 945017.

226909

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 19 3 05 PM '95

ALICE G. E. HANCOCK
COUNTY RECORDER

BY ma DEPUTY