

Certified, Filed and or Recorded on
Oct. 07, 2008 AT 02:53PM


Signed: BW
MARILYN J NOVAK B V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 25, Township 36 N., Range 29 W.
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/01/08 found a SPIKE & TIES FROM NIELSEN CERTIFICATE OF LOCATION (# 261568).
- left monument as found lowered monument removed monument (explain)
- On 10/01/08 placed an PK NAIL WITH BENTON COUNTY WASHER OVER SPIKE.

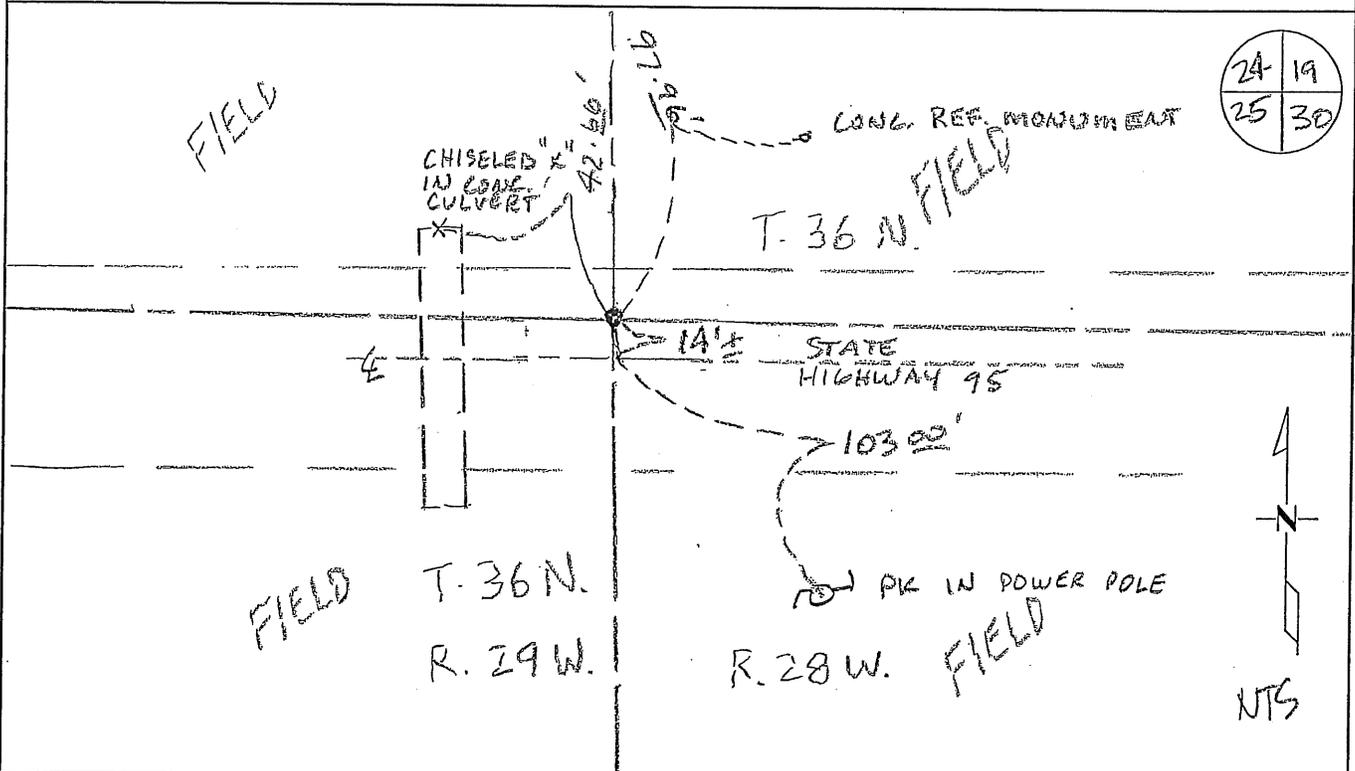

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jason W. Oley
Benton County Surveyor
License No. 19552

Date: 10/06/08

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

K252

Northeast Corner of Section 25, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as:

8" Elm	N 75 W	59 links
6" Elm	N 60 E	257 links
8" Blk Ash	S 89 E	239 links
12" Maple	S 21 W	82 links

No Date County ties:

PP SE 54.5 Cor FP W 33.0

1901 County Road Book, pages 209 and 265, shows road surveyed by John Whilt, County Surveyor, running from NW corner Section 30, 36-29 to North 1/4 corner Section 29, 36-28 on section lines. Gives distance of 39.47 chains to the North 1/4 corner Section 25 and 79.92 chains to the NE corner Sec. 30.

1915 County Surveyor's Record Book 1, pages 45 and 46, and Record Book A, Map No. 11 shows that J.P. Soderstrum did a survey of Section 19. The notes state that he found corner, but no information given. (Believe the following is related: County Engineer's notebook 46, page 72 has notes that show planted a 5"x5"x24" granite monument.)

1922 On January 12, 1922 Bradley Engineering Service notes the corner is at the centerline of roads. (See Plat Cabinet D, 95B)

1925 County Surveyor's Record Book 1, page 133, and County Engineer's Notebook No. 46, note that Paul Zeese found an iron monument at the corner with the following reference tie.

TP NW 77.1'

1940 County Engineer's Notebook No. 134 contains survey of CAR 40 running from the south to this corner. Corner is shown as a spike in center of TH 95. Ties:

Stop Sign N 37.90' Hwy. M. NW 70.15'

1942 Minnesota Highway Department (in Book 89, page 33) notes a spike in place at the intersection of roads north/south/east/west. A boat spike replaced it.

1944 Minnesota Highway Department (in Book 89, page 1-18) notes a boat spike at the corner. The corner is 55.9 feet north of Station 432+04.5.

1948 MN/DOT Roll O-11, File No. 33-18 notes a spike was found and replaced with a boat spike. The corner is at the centerline of roads north/south/east/west and is 13.25 feet north of centerline.

1949 C.H. West, LS 932, found a boat spike and set a 8" X 30" round concrete monument at the location of the spike. He established reference ties and filed Certificate.

1997 James Nielsen, LS 11865, found a concrete monument and 1 reference tie of C.H. West's. He filed a Certificate of Location (#261568).

2008 Westwood Professional Services, Inc. found a spike at the corner and 2 of Nielsen's ties to the east. Position fits centerline location shown on MnDOT R/W Map No/ 33-18. Coordinates were established by GPS. Set a PK Nail with a washer over the found spike and updated ties.

County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-111266.413
 E-542767.679


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 25, Township 36, Range 29, 4th P.M.
STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 07/24/1997 found a concrete monument (down 1.3')
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

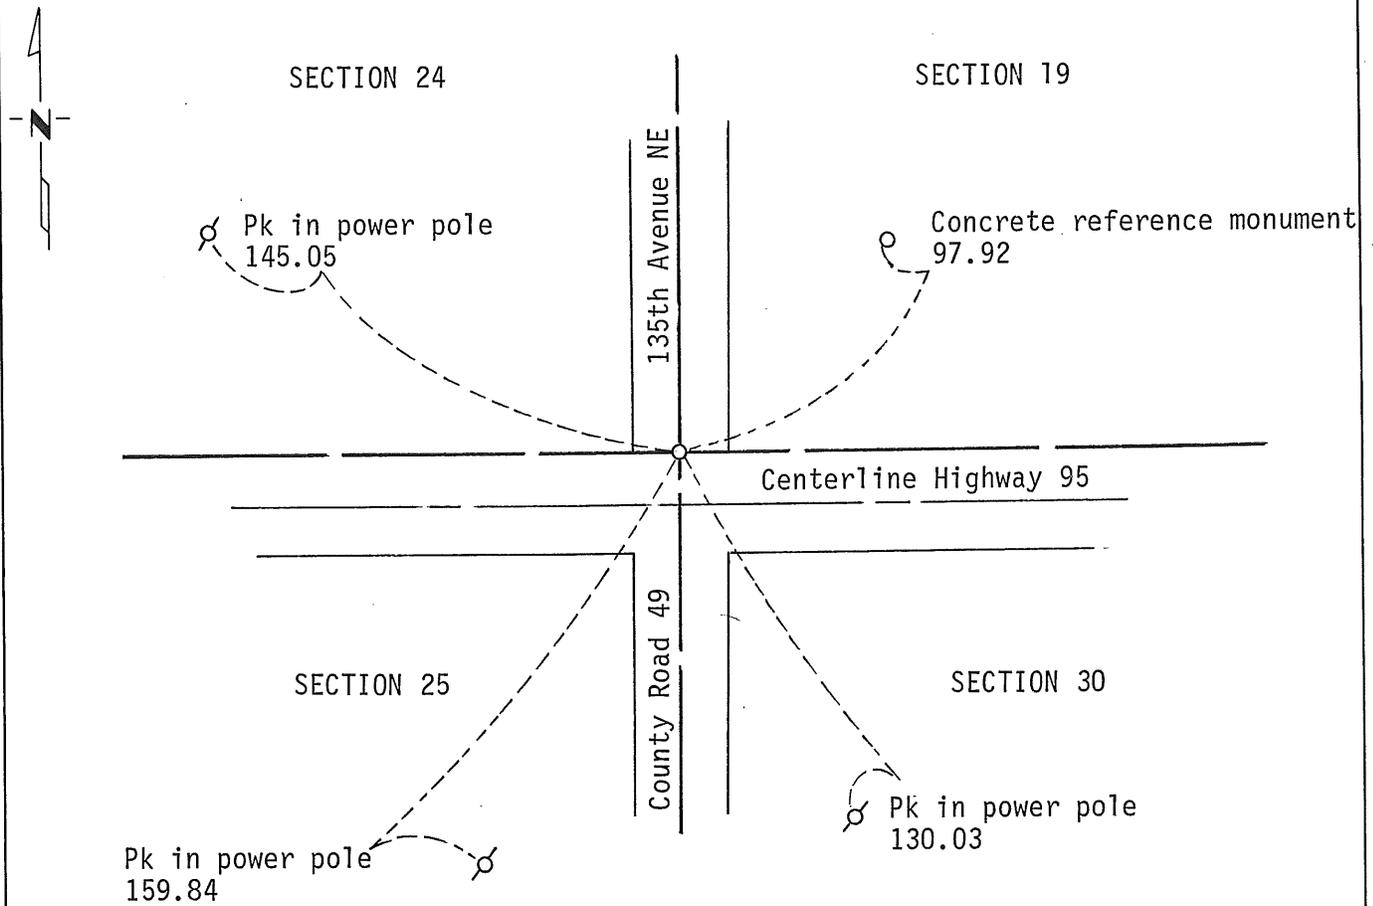

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James W. Nielsen 4/12/99
SIGNATURE DATE

Registration No. 11865
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

NORTHEAST CORNER SECTION 25, TOWNSHIP 36 NORTH,
RANGE 29 WEST, BENTON COUNTY, MINNESOTA

The original public land survey was run in 1855 and a wood post was set to mark the corner.

In 1942, the Minnesota Highway Department notes (Book #89, pages 1-33) call for a spike in place at the corner of the intersection of roads north-south, east-west. The spike was replaced with a boat spike and three reference ties were made.

In 1944, the Minnesota Highway Department notes (Book #89, pages 1-18) call for the boat spike 55.9 feet north of L^w station 432+04.5.

In 1949, TH 95 was reconstructed. The Minnesota Highway Department notes (Book #91 pages 1-27) call for finding the boat spike on July 26, 1949 and making reference ties. Then on November 10, 1949 setting an eight-inch by 30-inch precast concrete monument for the corner and two concrete monuments for reference marks.

In 1997, the Minnesota Department of Transportation recovered the 1949 concrete monument (down 1.3 feet) and one concrete monument reference monument to the northeast.

For details and survey analysis contact the Minnesota Department of Transportation Surveys Office in Baxter.

261568

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

OCT 6 8 35 AM '99

ALICE O. ENGELBOMER
COUNTY RECORDER

BY BW. DEPUTY