

Certified, Filed and or Recorded on  
Nov. 06, 2008 AT 08:43AM



Signed: CK  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 31, Township 36 N., Range 29 W.  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 21 OCT 2008 found a CAST IRON MONUMENT
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

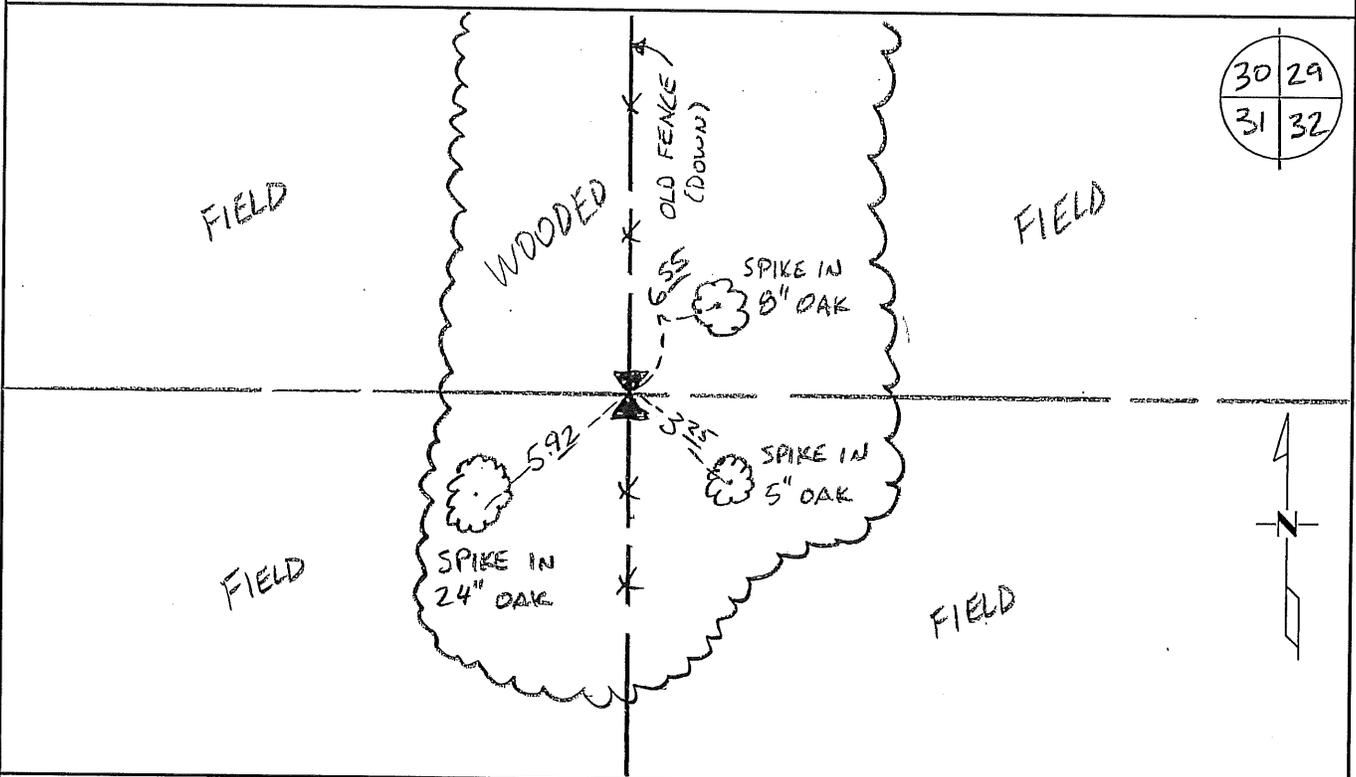

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oly  
Deputy Benton County Surveyor  
License No. 45872

Date: 11/04/2008

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

**Statement of Evidence:**

K312

Northeast Corner of Section 31, Township 36 North, Range 29 West, St. George Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey established corner marked by a wood post with bearing trees:
- |            |         |           |
|------------|---------|-----------|
| 8" Blk Ash | S 2 ¼ W | 675 links |
| 6" Blk Ash | N 3 ½ E | 461 links |
- 1908 County Surveyor's Record Book 1, page 142, notes a post at the corner location.
- 1930 County Surveyor's Record Book 1, page 145, notes Elletson used this corner in setting the East ¼ corner.
- 2004 Certificate of Survey by William Lunser, LS 9394, shows iron monument found at the corner with distances of 2659.35 feet to the East ¼ corner of Section 30 and 2651.15 feet to the North ¼ corner Section 31.
- 2008 The County Surveyor's Office searched and found a cast iron monument as referenced by Lunser in 2004. Corner falls along an old north-south fenceline. Distances to the E ¼ Cor. of Sec. 30 and the N ¼ Cor. of Sec. 31 measure 2659.39 ft. and 2651.16 ft., respectively, which agree with Lunser measurements, above. The Surveyor accepts the monument and updated ties.

County Coordinates Obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-105578.414  
 E-516404.893