

Certified, Filed and or Recorded on
Oct. 14, 2008 AT 10:14AM


Signed: [Signature]
MARILYN J NOVAK G V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 32, Township 36N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/10/08 found a CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

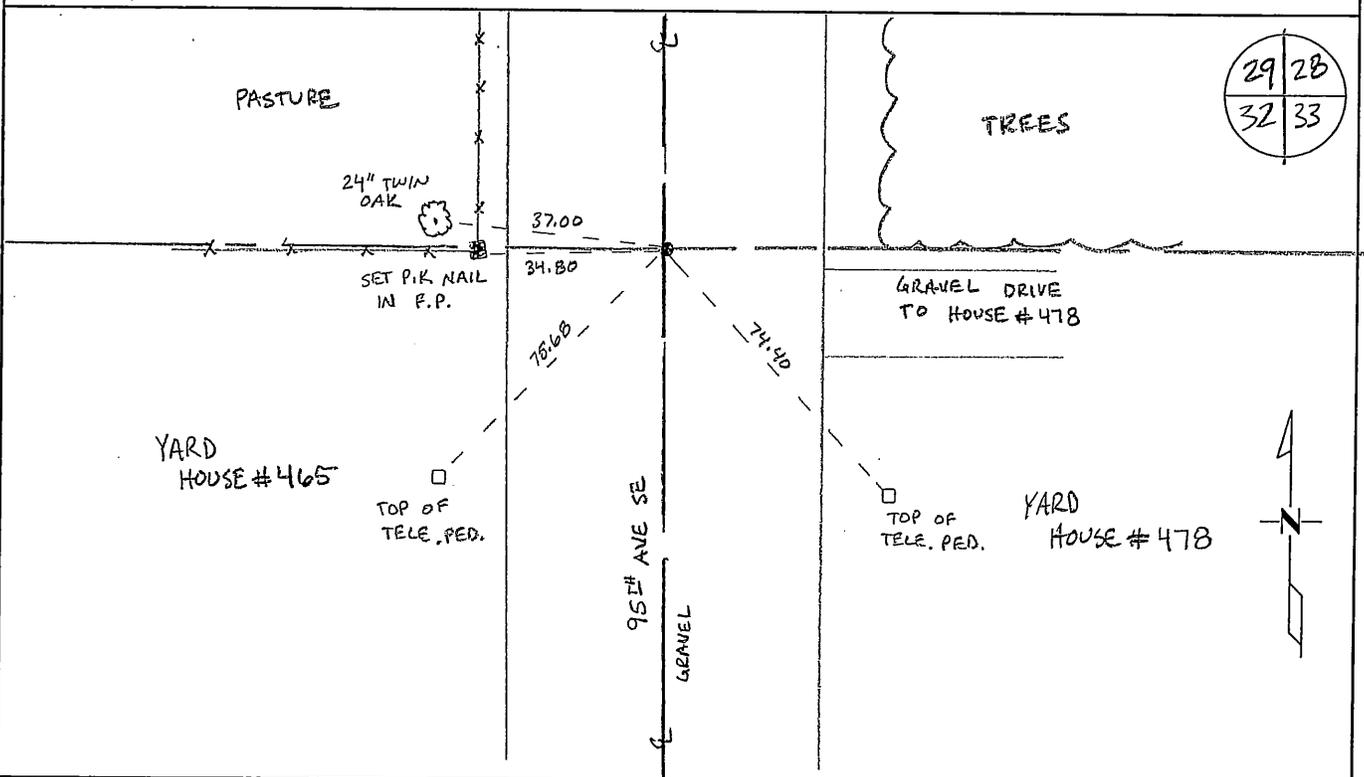

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]
Deputy Benton County Surveyor
License No. 45872

Date: 10-13-2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

K322

The Northeast Corner of Section 32, Township 36 North, Range 29 West, St. George Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey established corner marked by a wood post with bearing trees:

15" Bur Oak	S 1 ½ E	693 links
12" Bur Oak	S 1 ¼ W	661 links

Undated County Surveyor's Record Book 1, page 147, notes a stone with the following reference ties:

6" W Oak	W	54.8
14" R Oak	SE	67.3

1982 David Regan, LS 12236, set a cast iron monument at the centerline of a road north/south and a fence line west. He filed a Certificate of Location (#163372).

2003 On 5/7/03 dug with a backhoe at corner area and found a 8" x 10" x 16" pointed stone standing upright down 2.2 feet under the east side of the CIM set in 1982. Found no evidence of the previous ties noted as "undated". Left CIM in place as the corner and took new ties:

N & D in north side 18" Bur Oak	East	76.29
N & D in NW side PP	SE	61.64
Iron pipe w/cap 16095	East	33.00

County Coordinates Obtained by GPS to CIM:

NAD 83 (1996 Adjustment)

N- 105599.290

E- 521665.614

2008 The County Surveyor's Office searched and found a cast iron monument as set by Regan in 1982 and verified per corner excavation of found stone monument in 2003. The Surveyor accepts the CIM position and set new ties to same. Benton Coordinates obtained by GPS to the CIM agree with those reported in 2003, above.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 32, Township 36, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 7/14/82 placed a Benton County cast iron monument on center
DATE
line of north-south Twp. Rd. and on fence line to west

SKETCH OF REFERENCE TIES

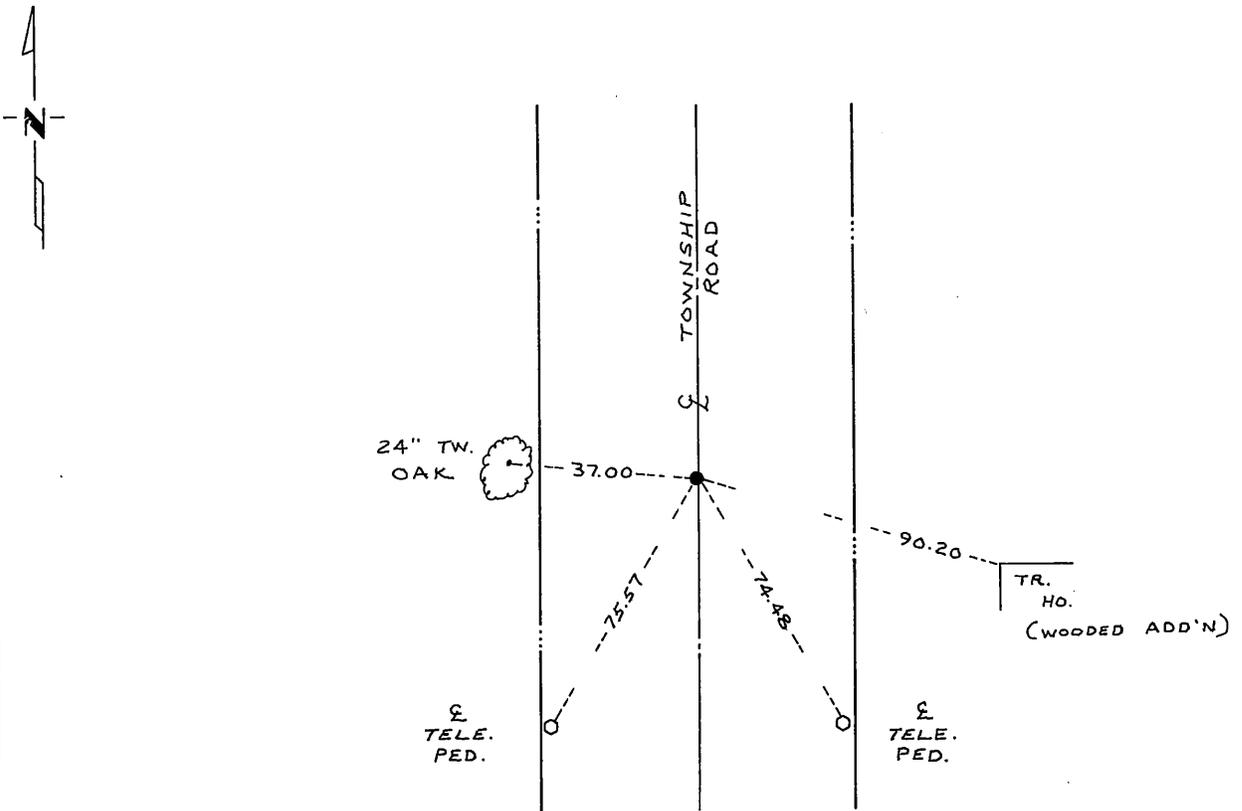

Statement of evidence relative to this corner location is on back of page. **163372**

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David S. Regan 9/1/82
SIGNATURE DATE

Registration No. 12236

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

County Recorder
OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 11 A.M. on the 18th day of October A.D., 1982

Register of Deeds T.A. Johnson

By _____, Deputy

DOCUMENT NO. _____