

Certified, Filed and or Recorded on  
Oct. 14, 2008 AT 10:15AM

Signed: CK  
MARILYN J NOVAK G V  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


SOUTH QUARTER Corner of Section 34, Township 36N, Range 29W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10/10/08 found a CAST IRON MONUMENT

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

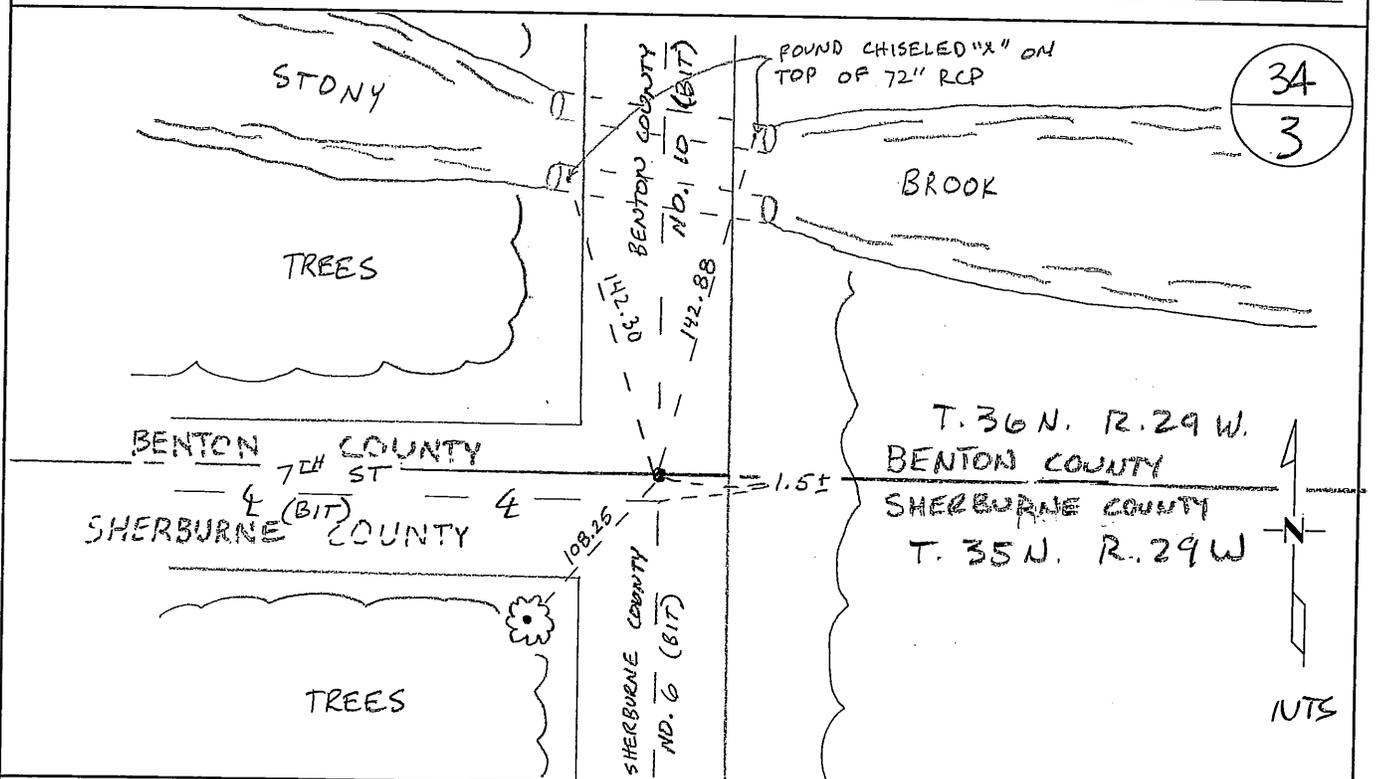

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Gley  
Deputy Benton County Surveyor  
License No. 45872

Date: 10-13-2008

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

**Statement of Evidence:**

K345

South Quarter Corner of Section 34, Township 36 North, Range 29 West, St. George Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey established this corner and set a wood post in a mound for the corner location with a pit 6 links east.
- 1914 County Surveyor's Record Book 1, page 151, J.P. Sodestrum shows corner found as an oak stake on south side of creek marked "¼ S" with road north. Said stake claimed by Jos. Kampa to have remained in same location for last 30 years.

No Date ties on same page to iron:

S. End W. Bridge Rail	NW	117.2'
8" Poplar	NE	111.35'
8" Poplar	NW	90.1'

- 1927 County Engineer's Notebook No. 52 lists ties to oak stake:
- |              |          |
|--------------|----------|
| Cor. F.P. SW | 67.6'    |
| 8" Pop.      | NE 71.0' |

Pre 1940 MN/DOT notes by C. H. West for TH 95 show corner assumed in center of north-south road and 22 feet south of line between section corners.

- 1972 John Oliver, LS 8194, Sherburne County Surveyor, found iron pipe in road intersection with roads north, south, and west per old tie to bridge. He set a cast iron monument and filed Certificate of Location in Sherburne County. Tie to PK in Bridge Rail NW 117.16'.
- 1995 Comstock and Davis performed GPS work under contract with Benton County and Coordinates Obtained by GPS NAD 83 (1986 Adjustment) to a CIM:  
 N- 100220.669  
 E - 529565.256
- 1999 Sherburne County Surveyor's Office found a PK Nail per Document No. 177857 that fit old ties and set a cast iron monument and prepared new Certificate of Location.  
 County Coordinates converted from Sherburne County Coordinates:  
 NAD 83 (1986 Adjustment)  
 N- 100220.43  
 E- 529565.57  
 Using coordinates converted from Sherburne County gives distances of 2664.79 feet to the SW corner and 2656.8 feet to the SE corner with the corner being 36.93 feet south of a straight line between section corner.
- 2004 County Coordinates obtained by GPS to CIM  
 NAD 83 (1996 Adjustment)  
 N- 100220.768  
 E- 529565.063
- 2008 The County Surveyor's Office searched and located the cast iron monument as set by the Sherburne County Surveyor's Office in 1999, and which was perpetuated by Oliver's position in 1972. Position fits east-west and north-south occupation lines. The Surveyor accepts the CIM position and ties were updated.

Benton County Coordinates obtained by GPS to CIM  
 NAD 83 (1996 Adjustment)  
 N- 100220.680  
 E- 529565.004