

Certified, Filed and or Recorded on
Nov. 05, 2008 AT 08:32AM


Signed: [Signature]
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 4, Township 37, Range 31
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 9-29-08 found a CAST IRON MON
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

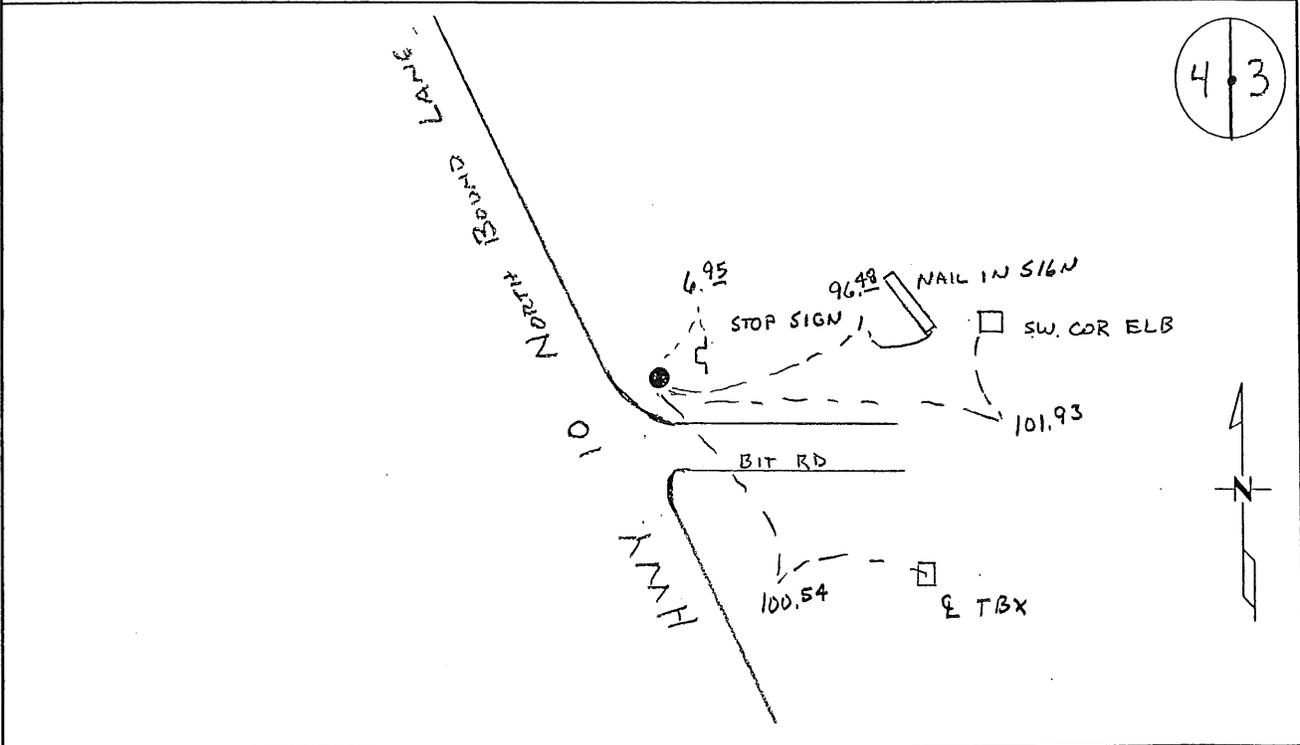

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]
Deputy County Surveyor
License No. 43932

Date: 11/3/08

Benton County Surveyor's Office
Chris Hoglund, Deputy County Surveyor
Minnesota License No. 43932

Statement of Evidence:

F043

East Quarter Corner of Section 4, Township 37 North, Range 31 West, Watab Township,
4th Principal Meridian, Benton County, Minnesota.

- 1850 Original US General Land Office survey set a wood post in a mound with pit 6 links east for the corner location.
- 1945 MN/DOT alignment and right of way map for US Highway 10 shows corner assumed in north-south road. No information about the corner is shown.
- 1975 M.W.Carley survey notes show a 1" iron pipe was found at the corner.
- 1975 Survey by H.G. Elletson, LS 728, shows an IM at the corner with a distance of 2883.70 feet to the NE corner of Section 4.
- 1988 William Lunser, LS 9394, set a cast iron monument at the found 1" iron pipe location that he had previously found in 1987 and filed a Certificate of Location (#191254). He notes distance to the NE corner of Sec 4 is 2882.29 feet and the distance to the SE corner of Sec. 4 is 2659.05 feet.
- 2002 Westwood Professional Services, Inc. found CIM per Lunser's certificate with 3 ties checking.
County Coordinates Obtained by GPS to CIM
NAD 83 (1996 Adjustment)
N-161417.581
E -462831.156
- 2008 Westwood Professional Services, Inc. found CIM at the corner location. CIM fits one remaining Lunser tie and coordinates obtained by GPS coincide with 2002 position. CIM is accepted as marking the obliterated position for this corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 4, Township 37, Range 31, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 12-1-1987 found a 1" Iron Pipe
DATE

left monument as found, lowered monument, removed monument (explain)

On 6-2-88 placed a Benton County Cast Iron Monument
DATE

SKETCH OF REFERENCE TIES

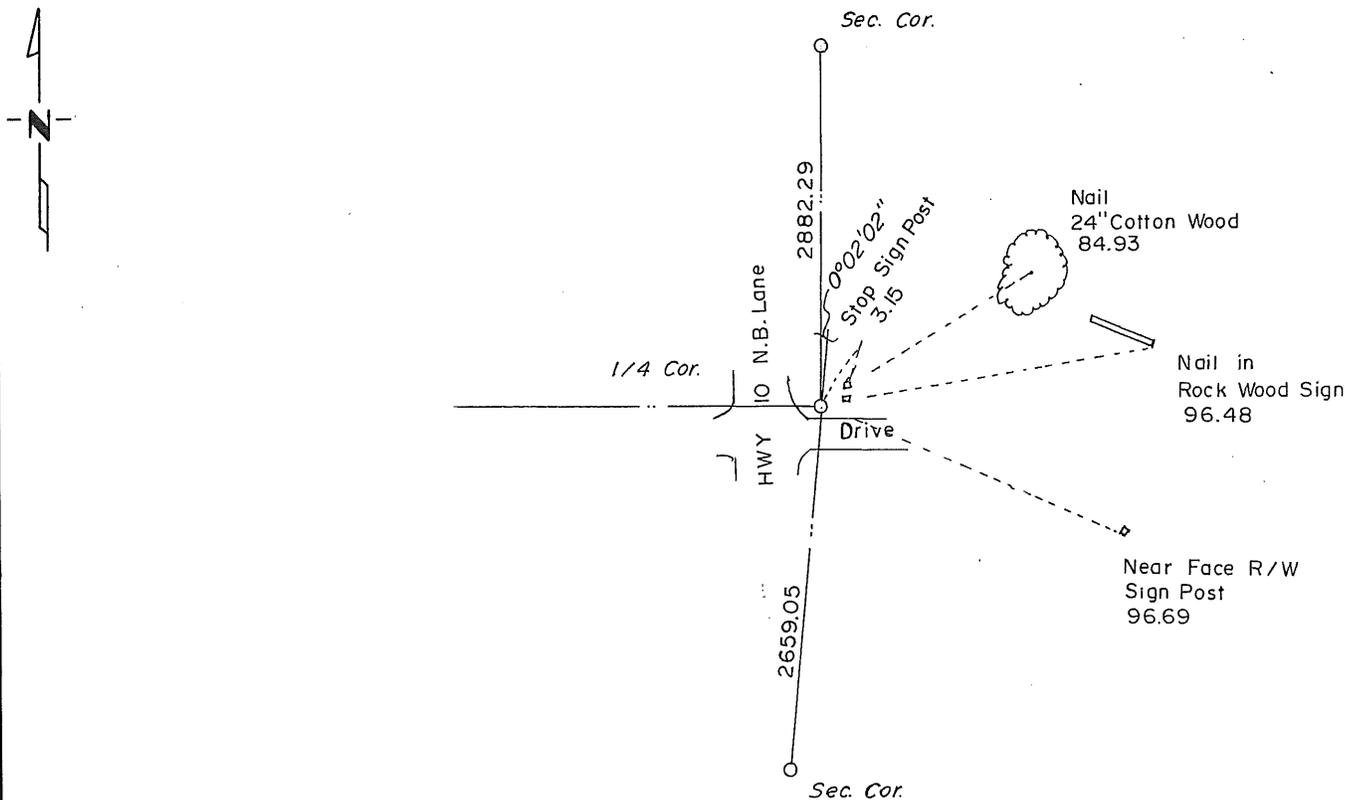

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Loren 12/15/88
SIGNATURE DATE

Registration No. 9394

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

EAST QUARTER CORNER OF SECTION 4, TWP 37, RG 31;
6-5-1975

1" Iron Pipe was found and used as 1/4 Corner
by M.W. Carley

12-1-87

Found 1" iron pipe and measurements to the north
and south verified this location.

6-2-88

Located 1" iron pipe as found in 1987, verified
ties and placed a Benton County Cast Iron Monument
at this location.

1 9 1 2 5 4

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 12 11 59 AM '89

ALICE C. ENGELMEYER
COUNTY RECORDER

BY *[Signature]* DEPUTY