

Certified, Filed and or Recorded on
Nov. 05, 2008 AT 08:33AM


Signed: [Signature]
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 12, Township 37, Range 31
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 9-29-08 found a CAST IRON MON
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

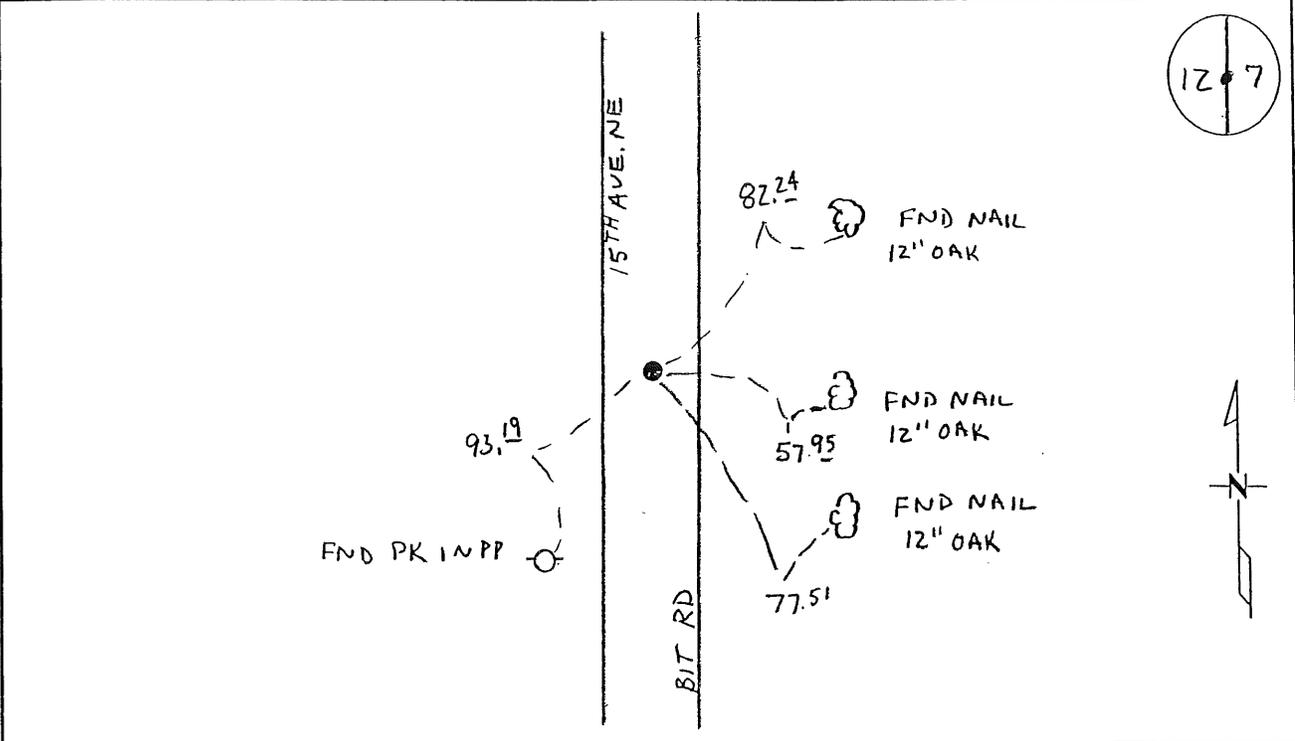

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]
Deputy County Surveyor
License No. 43932

Date: 11/3/08

Statement of Evidence:

F123

East Quarter Corner of Section 12, Township 37 North, Range 31 West, Watab Township, 4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|-------------|------------|----------|
| 6" Blk. Oak | N 63 W | 16 links |
| 6" Blk. Oak | S 55 1/2 E | 52 links |
- A line tree was noted as a 6" Bur Oak South 24.97 chains
- 1940 County Engineer's Notebook No. 133 contains a road survey for CAR No. 41 running south to north. No corner is shown. Stationing gives distance of 5477.7 feet for the east line of the section.
- 1980 William Lunser, LS 9394, set a 1/2" iron monument on a straight line and split between the NE and the SE corners of Section 12 and filed a Certificate of Location (#158866). He shows corner in the centerline of roads north/south. He notes a distance of 2739.05 feet to the NE and the SE corners of Section 12.
- 1988 Paul Wellen, LS 10461, found a RR spike at the centerline of a north/south road. Reference ties to Lunser's monument fit the RR spike. Wellen removed the RR spike and set a cast iron monument and filed a Certificate of Location (#191226).
- 2002 Westwood Professional Services, Inc. found a cast iron monument in the centerline of County Road 78 (running north and south).
- 2005 Daniel Kron, LS 42621, found a broken CIM and measured 2738.93 feet to the SE corner and 2739.06 feet to the NE corner.
County Coordinates obtained by SEPI:
NAD 83 (1996 Adjustment)
N- 156257.423
E- 478857.889
- 2008 Westwood Professional Services Inc. found a broken cast iron monument at the centerline of roads north/south. Ties noted on the Certificate of Location Doc. # 191226 were checked and found correct. Coordinates Obtained by GPS coincide with 2005 Kron position. CIM is accepted as marking the obliterated position for this corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 12, Township 37N, Range 31W, 4TH P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 7/18/88 found a RAILROAD SPIKE
DATE

left monument as found, lowered monument, removed monument (explain)

On 7/18/88 placed a CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

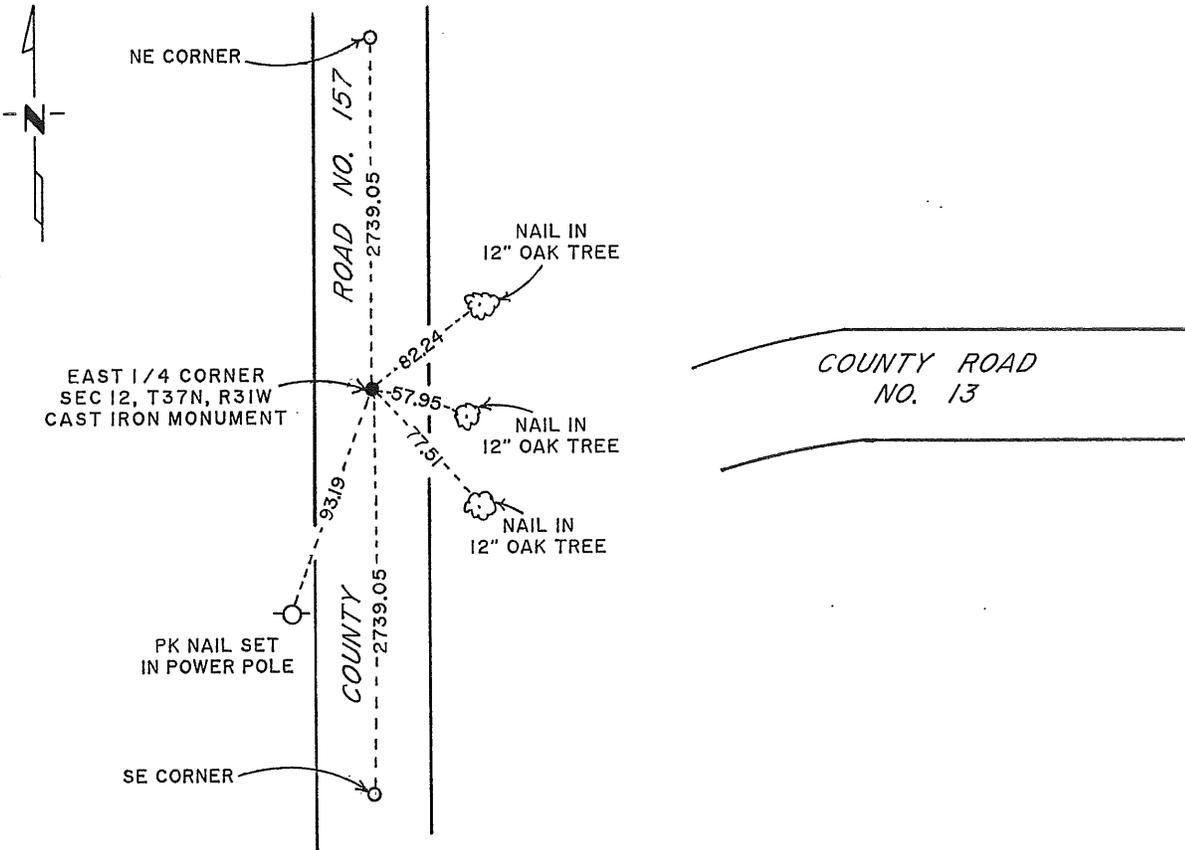

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul Miller 12/12/88
SIGNATURE DATE

Registration No. 10461

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

EAST Quarter CORNER, SEC. 12, T37N, R31W, 4TH P.M

1. During the G.L.O. Survey of 1849, Mr. Theodore Conkey, a U.S. Deputy Surveyor, set a wooden post to mark this corner.
2. The Benton County Surveyor's records provide no information for the relocation of this corner.
3. On 25 April 1980, William F. Lunser, Land Surveyor, set a 1/2 inch iron monument to mark this corner.
4. On 18 July 1988, Paul E. Wellen & Associates Inc., found a railroad spike set at the location of the 1/2 inch iron monument set by William F. Lunser (reference ties still fit) and set a cast iron monument.

191226

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, ILL
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 12 11 42 AM '89


ALICE C. ENGELMEYER
COUNTY RECORDER

BY *Alice C. Engelmeyer*

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 25 day of April, 1980
 I did SET the East Quarter corner of Section 12,
 Twp. 37, Rg. 31, Benton County, Minnesota, which
 was evidenced by Centerline Road N&S And Straight line and Split
Between NE. Cor. and SE. Cor.

I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of 1/2" iron monument and that
 I did establish witness or reference monuments as shown below:

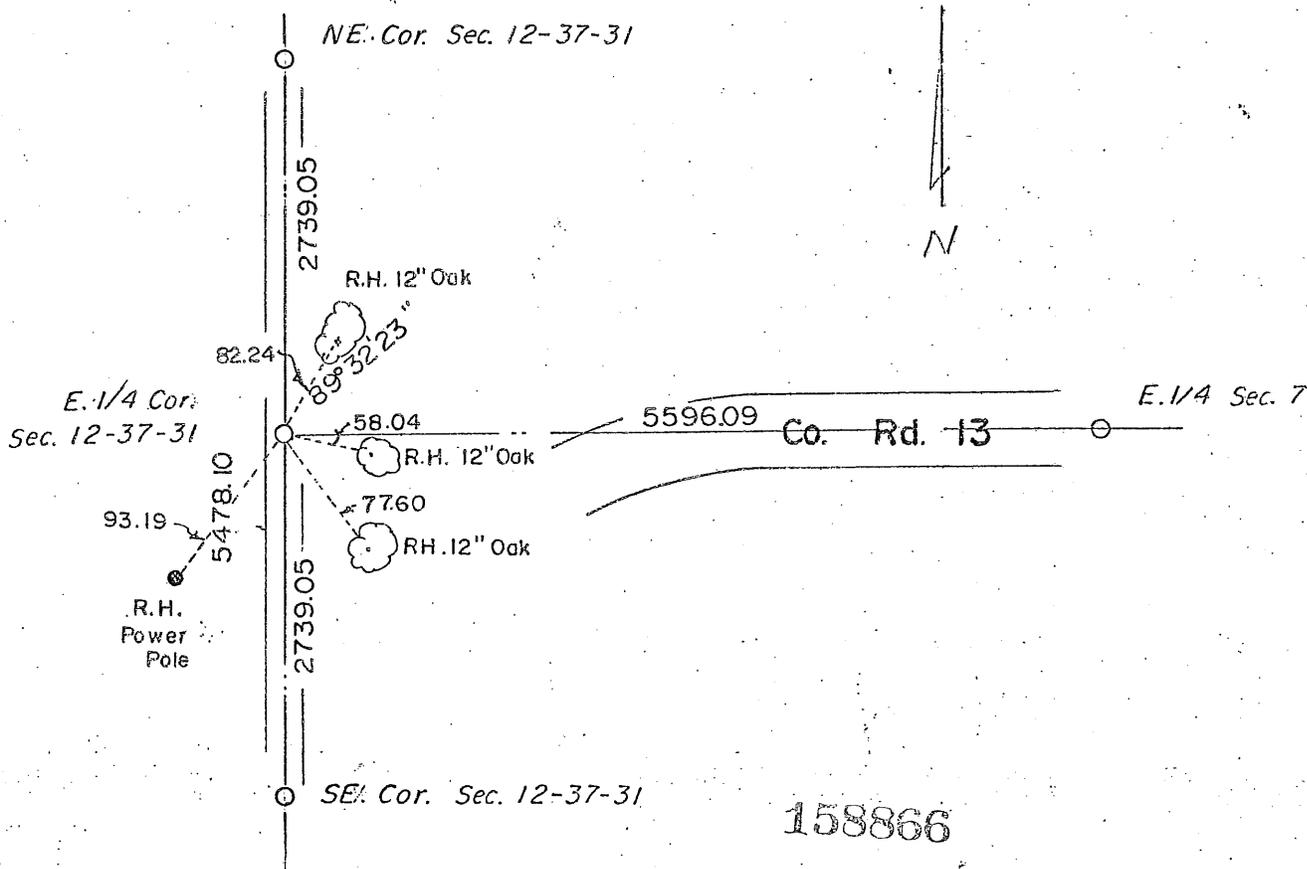

158866

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

William J. Larson

Minn. Registration No. 9394

County Recorder
 Office of the ~~Register of Deeds~~,
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 7th day of April, 1981. 3 P.M.

F. G. Johnson
~~Register of Deeds~~ *County Recorder*

By _____ Deputy.