

Certified, Filed and or Recorded on
Nov. 05, 2008 AT 08:34AM


Signed: [Signature]
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 13, Township 37, Range 31
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10-6-08 found a CAST IRON MON
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

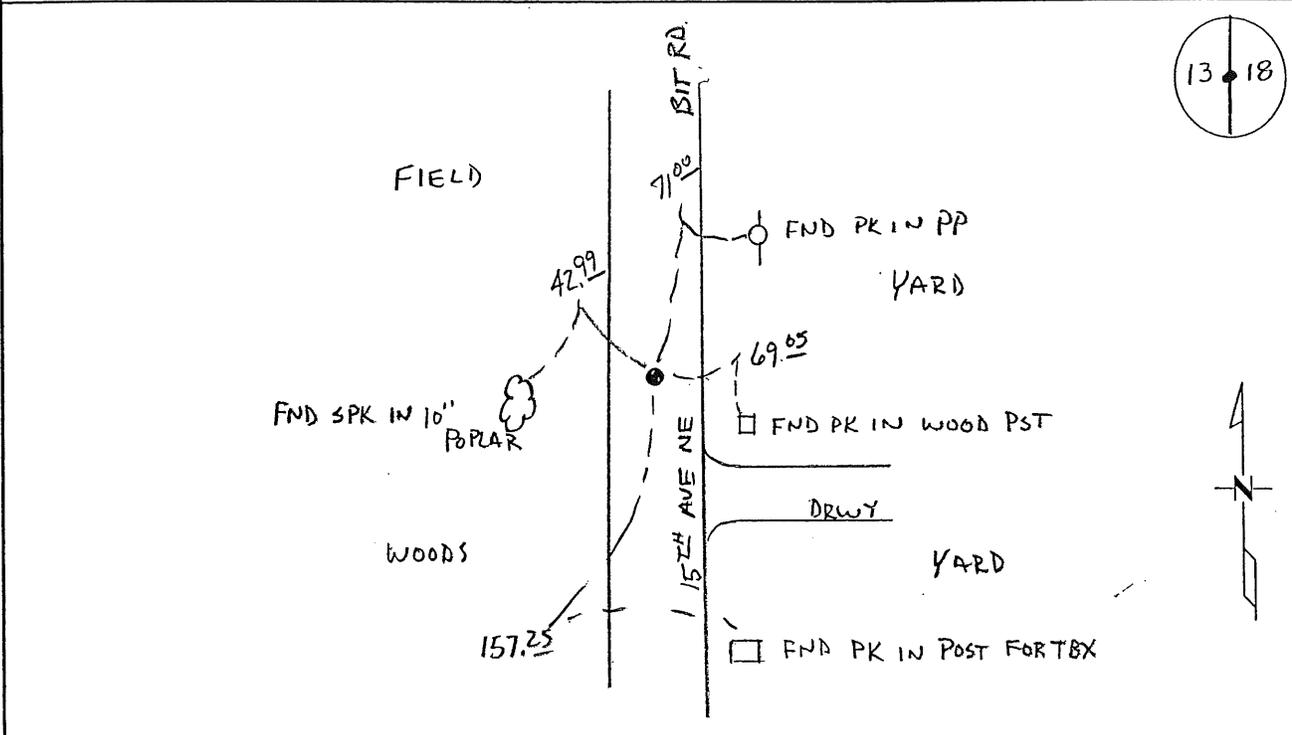

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]
Deputy County Surveyor
License No. 43932

Date: 11/3/08

Statement of Evidence:

F133

East Quarter Corner of Section 13, Township 37 North, Range 31 West, Watab Township, 4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|-------------|--------|-----------|
| 4" Blk. Oak | S 29 E | 84 links |
| 2" Blk. Oak | S 71 W | 262 links |
- 1898 County Road Book, page 163, shows road surveyed by Felix Parrent, County Surveyor, south to north on town line. Survey gives distance of 80.58 chains (5318.28 feet) along the east line with no mention of the ¼ corner.
- 1940 County Engineer's Notebook No. 133 contains a road survey for CAR No. 41 running south to north. No corner is shown. Stationing gives distance of 5318.3 feet for the east line of the section with a fence line east at 2721.0 feet north of the SE corner.
- 1979 Paul Wellen, LS 10461, found an iron pipe in the centerline of County Road 57 opposite a fence line to the east. He set a cast iron monument and filed a Certificate of Location (#154384). His notes show a distance of 2596.62 feet to NE corner and 2717.02 feet to the SE corner of Section 13.
- 1990 Paul Wellen found a RR spike in the centerline of County Road 57 at the location where the 1979 cast iron monument was set. (The cast iron monument is now gone). A new cast iron monument was set and a Certificate of Location (#201471) was filed.
- 2008 Westwood Professional Services found a cast iron monument. CIM fits 1990 Wellen ties. CIM is accepted as marking the obliterated position for this corner.
Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N- 150922.968
E- 478757.256

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST 1/4 Corner of Section 13, Township 37, Range 31, 4 P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 7 AUG. 90 found a R.R. SPIKE
DATE

left monument as found, lowered monument, removed rnonument (explain)

On 7 Aug 90 placed a COUNTY MONUMENT
DATE

SKETCH OF REFERENCE TIES

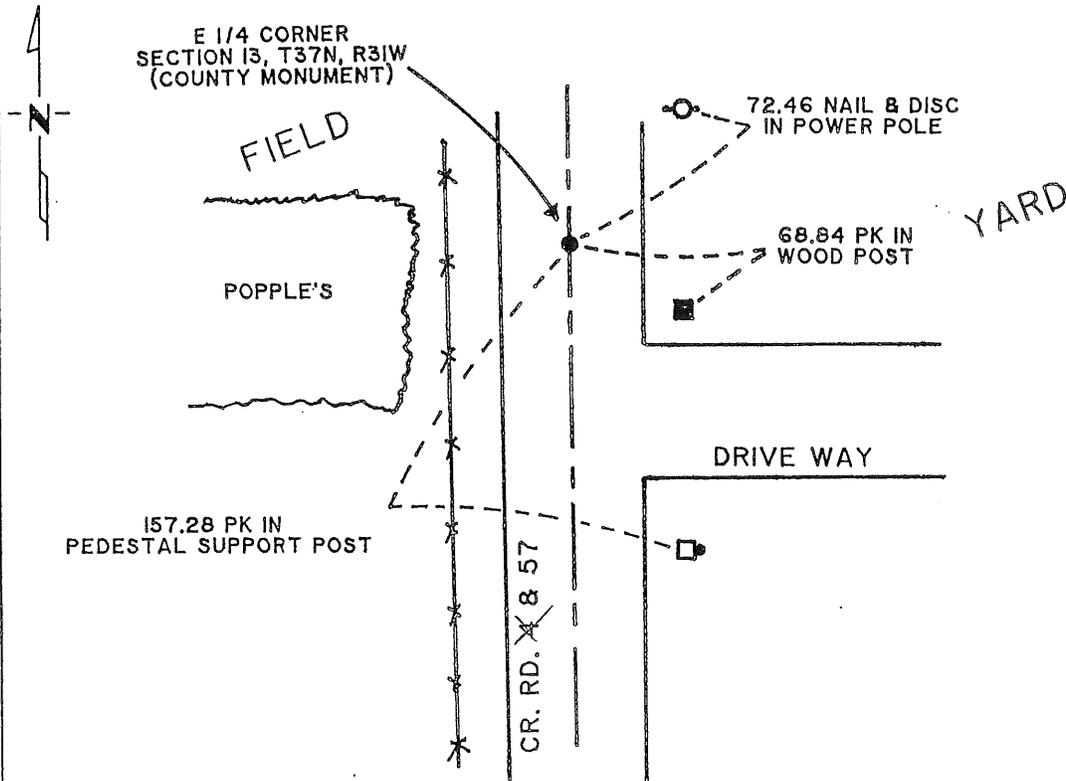

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Long J. Miller 1/14/91
SIGNATURE DATE

Registration No. 10461

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

Northeast corner, of Section 36, T
37 N, R 31 W, of the 4th Principal Meridian.

1. During the G.L.O. Survey of 1849, Mr. Theodore Conkey, a U.S. Deputy Surveyor, set a wood post to mark this corner.
2. A search of the Benton County Surveyor records provided no further information for the location of this corner.
3. On July 20, 1979, Paul E. Wellen & Association, found an iron pipe in the center line of Benton County Road 57 opposite a fence line to the east and placed a cast iron monument and made three (3) reference ties.
4. On August 7, 1990, Paul E. Wellen & Associates, Inc., found a railroad spike in the intersection of the center line of Benton County Road 57 at the location where 1979 cast iron monument was placed, (there is no evidence of 1979 cast iron monument) and placed a new cast iron monument at this location. We also established new reference ties as indicated.

201471

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

FEB 25 8 20 AM '91

ALICE C. ENGELMEYER
COUNTY RECORDER

BY Jed DEPUTY

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East 1/4 _____ Corner of Section 13, Township 37, Range 31, _____ P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES



Filed under West 1/4 Section 18 , T37 R30

Certificate # 154384

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE DATE

Registration No. _____

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____