

Certified, Filed and or Recorded on  
July 06, 2010 AT 03:15PM

Signed: BW  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter Corner of Section 22, Township 37 North, Range 31 West, Fourth Principal Meridian, Benton County, Minnesota.

At this corner location shown on the sketch:

On 10/08/2008 found a 1" open iron pipe

left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

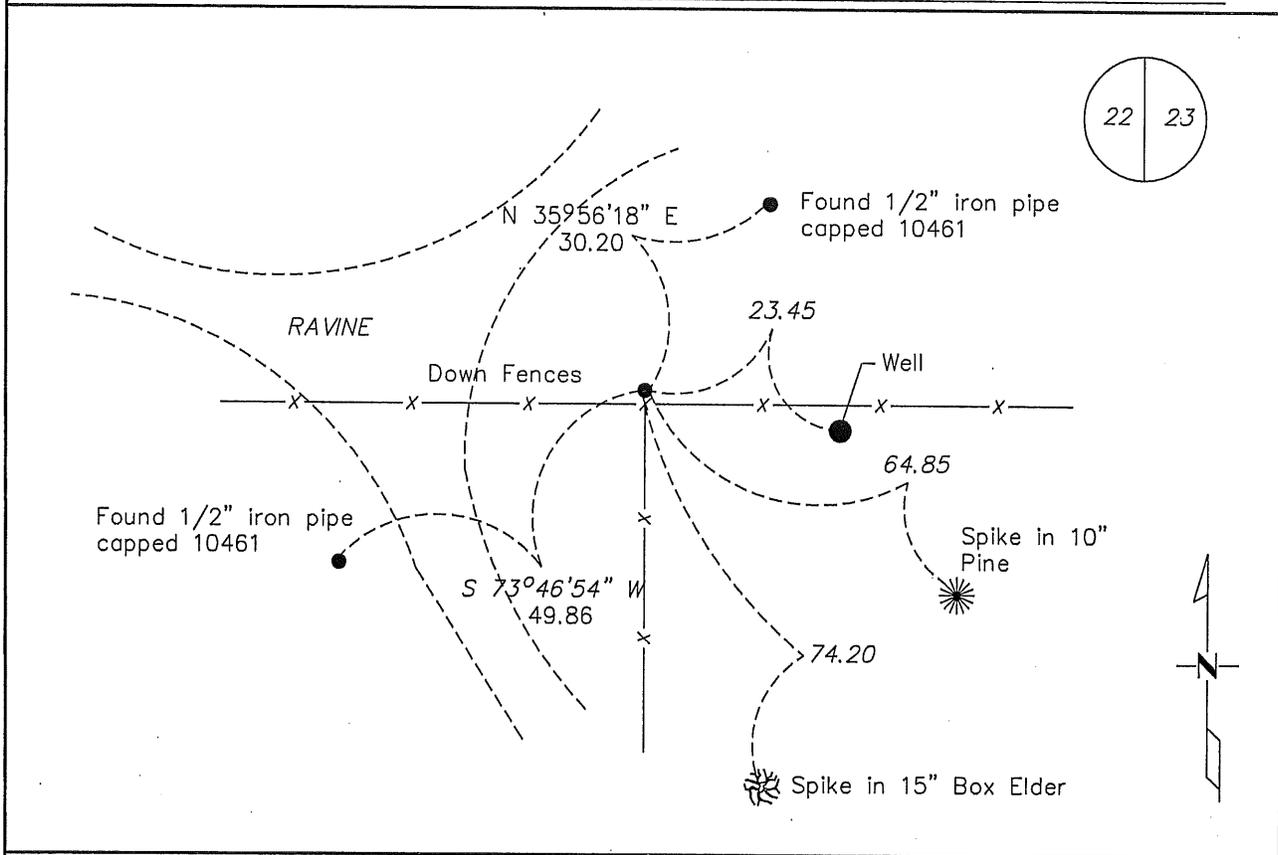

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a Licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock  
Benton County Surveyor  
License No. 19552

Date: 7/2/2010

Benton County Surveyor's Office  
 Jerome C. Wittstock, County Surveyor  
 Minnesota License No, 19552

**Statement of Evidence:**

East Quarter Corner of Section 22, Township 37 North, Range 31 West, Watab Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1850 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.  
 10" Bur Oak N 1/2 E 897 links
- 1946 MN/DOT alignment map for TH 10 shows corner assumed at the intersection of fence lines north, south, and west 503.5 feet west of the centerline.
- 1978 Ronald Engelmeyer, LS #13334, set a 1" iron pipe at the intersection of occupation lines from the west and the south. A Certificate of Location (#151562) was filed. A distance of 2648.75 feet was measured to the NE Corner of Section 22 and a distance of 2659.87 feet was measured to the SE Corner of Section 22.
- 1978 Paul Wellen, LS #10461, found an iron monument at the intersection of a fence line from the east and a broken wire from the south. A Certificate of Location (#151865) was filed. (2 ties appear to be common with Engelmeyer).
- 2001 Barry Dorniden, LS #23044, found an iron pipe at the corner location. Measured 2648.76 feet to the NE corner and 2660.01 to the SE corner of Section 22.
- 2004 MN/DOT  
 County Coordinates obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-145478.004  
 E-468081.884
- 2008 Westwood Professional Services found a 1" iron pipe at the intersection of downed fences east-west and south. The found pipe measures 2648.66 feet to the northeast corner and 2660.25 feet to the southeast corner of Section 22 which agrees with the 1978 Englemeyer and 2001 Dorniden measurements. A capped iron LS #10461 was found 30.40 feet northeast of the corner position which fits the 2004 MN/DOT coordinates, but were not able to locate a survey referencing this monument or another capped iron LS #10461 found west southwest of the corner position. The found 1" iron pipe is accepted as marking the obliterated corner position and coordinates were obtained with reference ties as shown.
- County Coordinates obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-145453.503  
 E-468064.089

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East 1/4 Corner of Section 22, Township 37, Range 31, 4 P.M.  
STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 10-24-78 found a iron monument at the intersection of east fence line and south broken wire fence line  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

## SKETCH OF REFERENCE TIES



*Refer to next page*

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul E. Skellen  
SIGNATURE DATE

Registration No. 10461

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

County Recorder  
OFFICE OF THE REGISTER OF DEEDS  
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 10 A.M. on the 26th day of March A.D., 1979  
County Recorder  
Register of Deeds J.A. Johnson


By \_\_\_\_\_, Deputy

DOCUMENT NO. 151865

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 2 day of October, 1978  
 I did find the East 1/4 corner of Section 22,  
 Twp. 37, Rg. 31, Benton County, Minnesota, which  
 was evidenced by an iron monument, at the intersection of east fence  
line, and south broken wire fence line.

I further certify that in order to perpetuate said corner I did  
 at the exact location thereof place a permanent marker consisting  
 of \_\_\_\_\_ and that  
 I did establish witness or reference monuments as shown below:

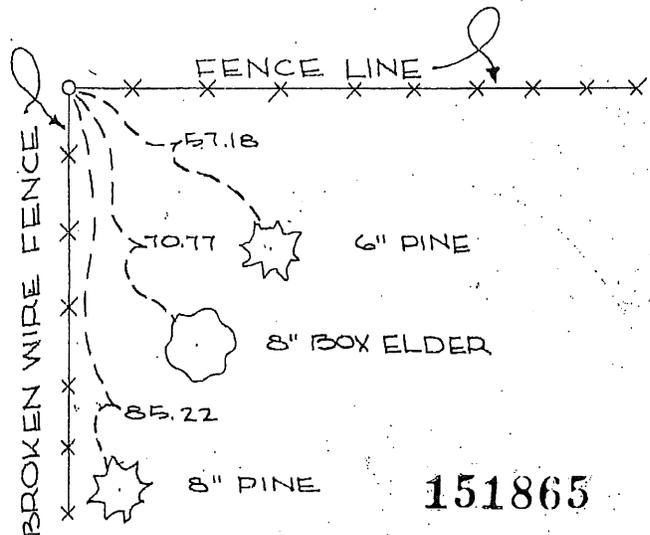

I hereby certify that the above  
 is true and correct and that I am  
 a registered Land Surveyor under  
 the laws of the State of Minnesota.

David J. Nelson

Minn. Registration No. 10461

Office of the County Recorder,  
Benton County, Minn.

I hereby certify that the within instrument  
 was filed for record in this office on the  
26th day of March, 1979,  
 at 10 a.m.

F. L. Johnson  
 County Recorder

By \_\_\_\_\_ Deputy.

**151865**

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 22, Township 37, Range 31, \_\_\_\_\_ P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On 8-24-1978 found a \_\_\_\_\_ was evidenced by occupation line to west & South  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a permanent marker consisting of 1" iron pipe  
DATE

### SKETCH OF REFERENCE TIES

  
*Refer to next page*

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Russell Engelmeiers \_\_\_\_\_  
SIGNATURE DATE

Registration No. 13334

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

County Recorder  
OFFICE OF THE REGISTER OF DEEDS  
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 9 A .M. on the 22nd day of February A.D., 1979

Register of Deeds W.E. Johnson


County Recorder, Deputy

DOCUMENT NO. 151562

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 24 day of August, 1978  
 I did restore the EAST QUARTER corner of Section 22,  
 Twp. 37, Rg. 31, BENTON County, Minnesota, which  
 was evidenced by OCCUPATION LINE to west & SOUTH

I further certify that in order to perpetuate said corner I did  
 at the exact location thereof place a permanent marker consisting  
 of 1" IRON PIPE and that  
 I did establish witness or reference monuments as shown below:

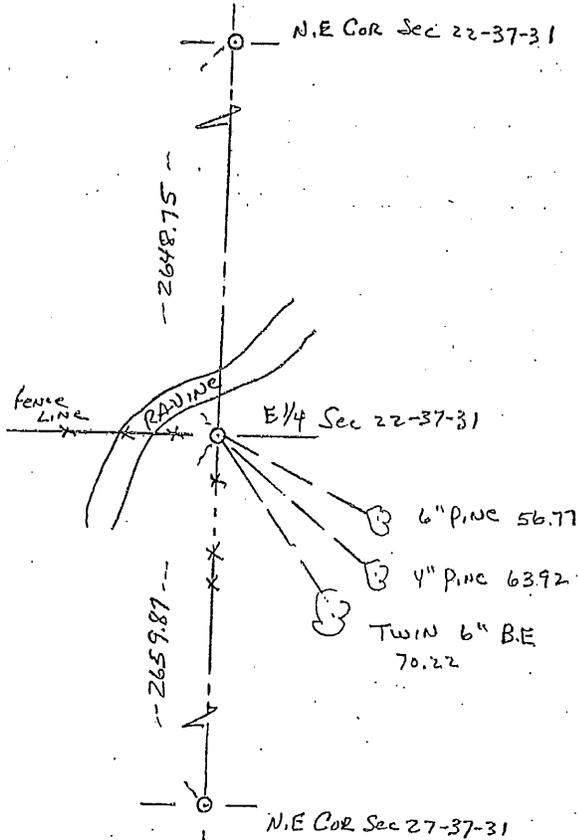

I hereby certify that the  
 above is true and correct  
 and that I am a registered  
 Land Surveyor under the laws  
 of the State of Minnesota.

[Signature]  
 Minn. Registration No. 13334

**151562**  
 Office of the ~~Register of Deeds~~  
Benton County, Minn.

I hereby certify that the within  
 instrument was filed for record  
 in this office on the 21 day of  
February, 1979. 9 a.m.

[Signature]  
 Register of Deeds County Recorder  
 By \_\_\_\_\_ Deputy.