

Certified, Filed and or Recorded on  
Dec. 24, 2008 AT 08:50AM


Signed: BW  
MARILYN J NOVAK B V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 27, Township 37, Range 31  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10-10-08 found a CAST IRON MONUMENT
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed on \_\_\_\_\_

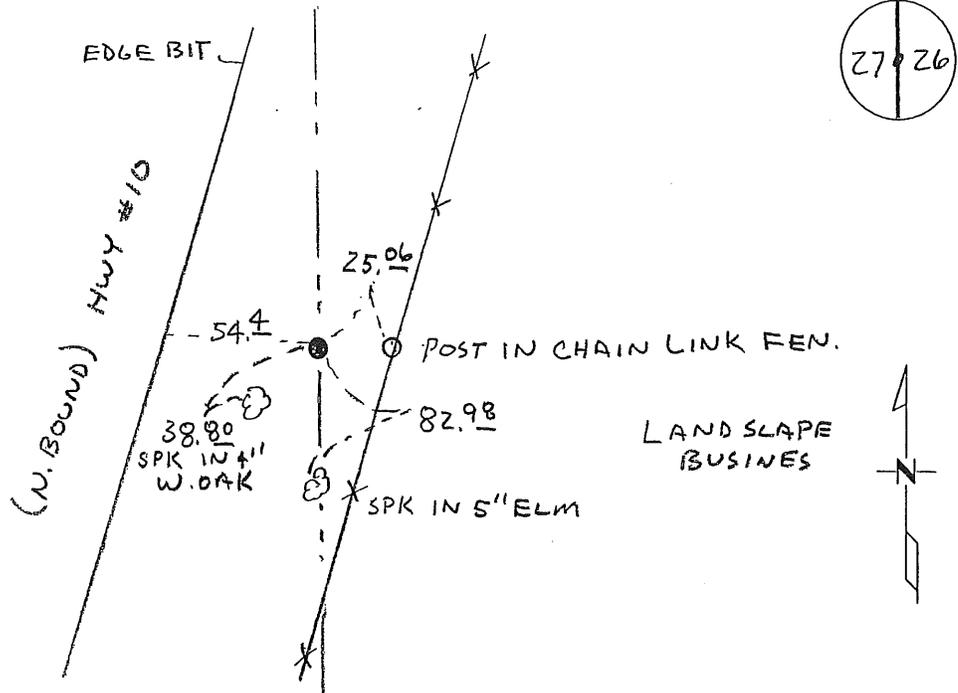

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature *Chris Hyslop*  
Deputy County Surveyor  
License No. 43932

Date: 12/17/08

Statement of Evidence:

F273


East Quarter Corner of Section 27, Township 37 North, Range 31 West, Watab Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1850 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.  
20" Bur Oak N 78 1/4 E 79 links  
12" Bur Oak N 79 1/2 W 326 links
- 1946 MN/DOT alignment map for TH 10 shows corner assumed on fence line east.
- 1980 William Lunser, LS 9394, set a 1/2" iron pipe at a proportionate measurement between the SE and NE Corners of Section 27. He filed a Certificate of Location (#158868) and notes a distance of 2651.53 feet to both the NE and the SE Corners of Section 27.
- 2003 Westwood Professional Services, Inc. found a MN/DOT cast iron monument. Measured 2662.62 feet to the NE corner and 2662.58 feet to the SE corner of Section 27. Corner found fits the lost position.  
County Coordinates obtained by GPS  
NAD 83 (1996 Adjustment)  
N-140132.058  
E-467997.572
- 2008 Westwood Professional Services, Inc. found a MN/DOT cast iron monument. Measured 2662.62 feet to the NE corner and 2662.58 feet to the SE corner of Section 27. Corner found fits the lost position. CIM is accepted as marking the obliterated position for this corner. Coordinates obtained by GPS coincide with 2003 position.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 5th day of August, 1980  
 I did locate \_\_\_\_\_ the East Quarter corner of Section 27,  
 Twp. 37, Rg. 31, BENTON County, Minnesota, which  
 was evidenced by \_\_\_\_\_ proportionate measurement between southeast  
 and northeast corners of same section.

I further certify that in order to perpetuate said corner I did  
 at the exact location thereof place a permanent marker consisting  
 of 1/2 inch iron pipe and that  
 I did establish witness or reference monuments as shown below:

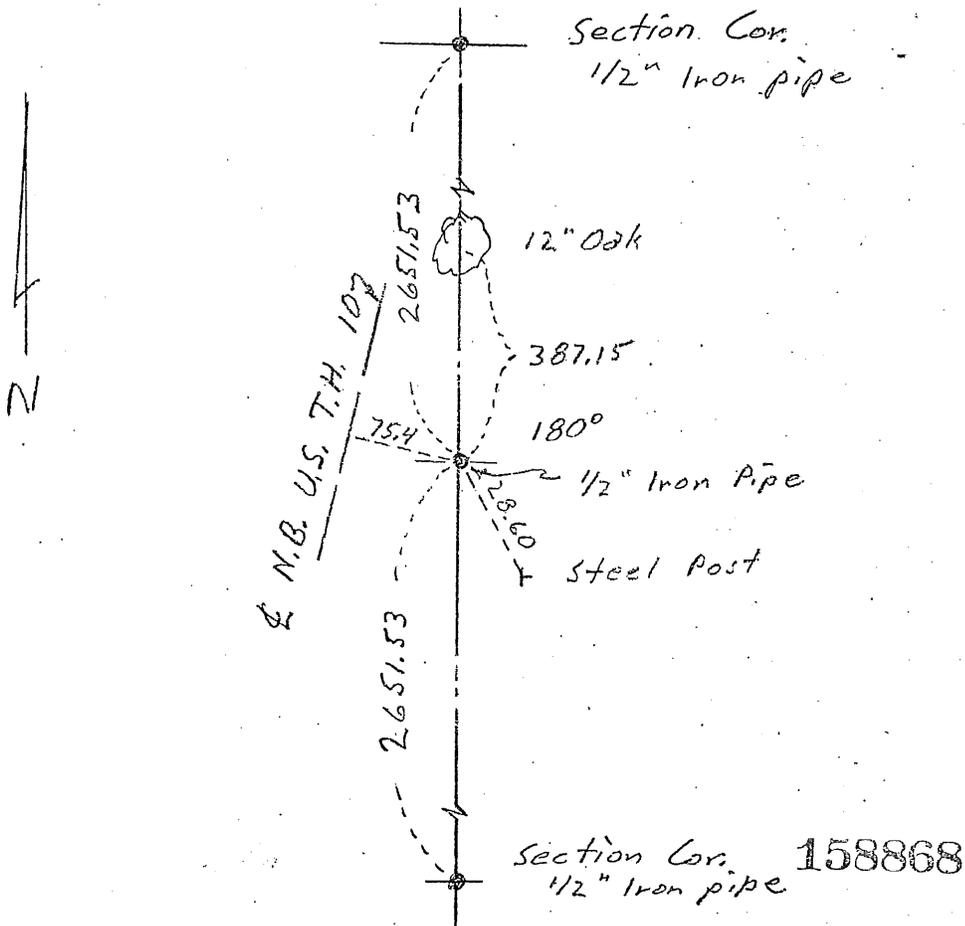

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

*William P. Luman*

Minn. Registration No. 9394

Office of the County Recorder  
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 7th day of April, 1981. 3 P.M.

*F.A. Johnson*  
 County Recorder

By \_\_\_\_\_ Deputy.