

265888


OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON
MAY 5 8 19 AM '00
ALICE O. ENGELBREYER
COUNTY RECORDER
BY *Alice O. Engelbreyer*

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 34, Township 37, Range 31
4th Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

- On 1/6/99 found a RAILROAD SPIKE AT THE SURFACE
DATE
- left monument as found lowered monument removed monument (explain)
- On 10/25/99 placed a HARRISON TYPE CAST IRON MONUMENT
DATE

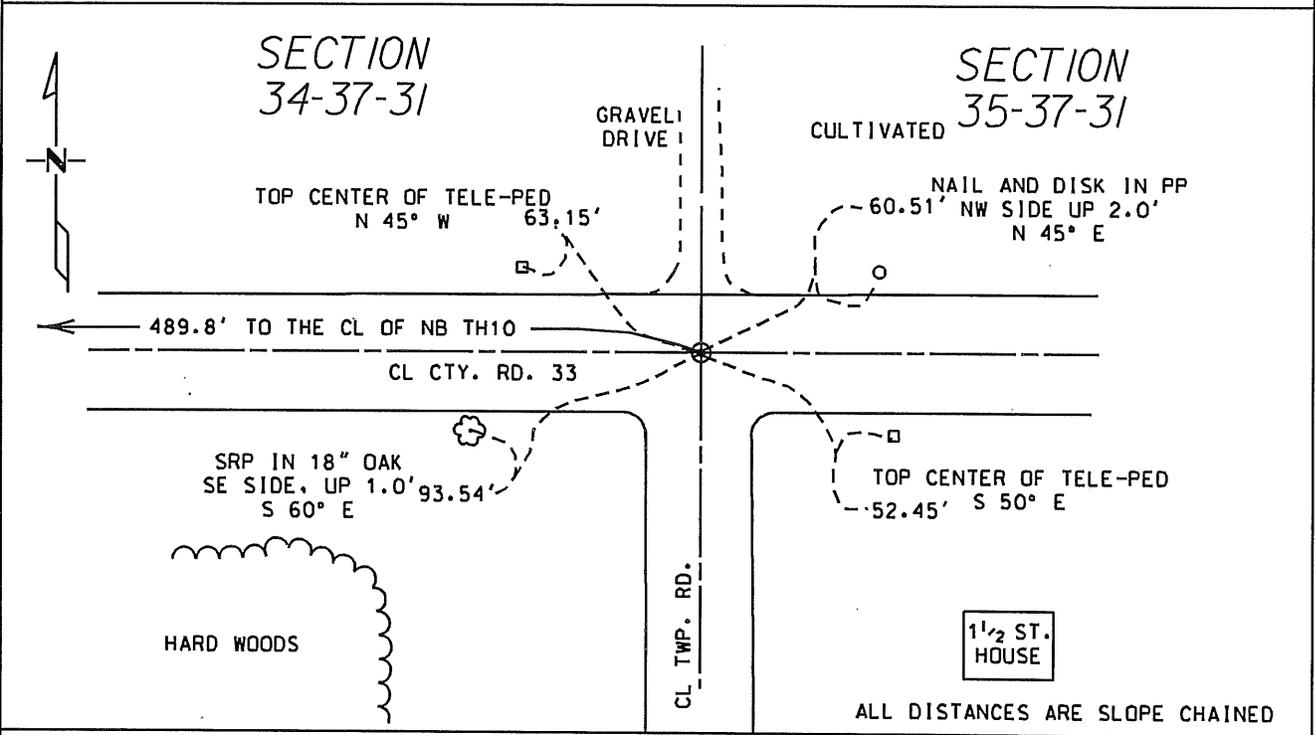

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

Signature *James Kramer* Date 4-5-2000 License No. 23668

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

East Quarter Corner Section 34, Township 37 North, Range 31 West.

Theodore Conkey and John Ryan ran the original public land surveys in 1849 and 1850. A wood post was set to mark the corner. Bearing tree ties were made to two 10" black oak trees.

A survey by Benton County done in approximately 1915 titled "Survey #2, Town of Watab" shows an iron monument being set 2655' north of the southeast corner of the said Section 34 at the intersection of roads to the east and west.

In 1960, Mn/ Dot survey crews found and surveyed an iron pin, which was later described in a 1975 Mn/DOT survey as a 14" x 5/8" bolt. Mn/DOT R/W map (File No. 34-23) shows a 14" x 5/8" bolt with one reference in common and agreement with that of Regan's 1982 certificate, see below. The distance from the bolt shown on the Mn/DOT R/W map to NB TH 10 centerline P.O.S.T. 368+64.5, by stationing of the Twp. Road, is 492.0 feet. The computed distance from the found RR spike to the computed NB TH 10 centerline, tangent line of the same curve, is 491.8 feet. This computes to a distance of 489.8 feet to the NB TH 10 centerline on curve.

On June 21, 1982 RLS David P. Regan found a bolt at the centerlines of the township roads to the east, west, and south. He then set a Benton County cast iron monument in place of the found bolt and filed a certificate, Doc. #162604.

In 1988 the roadway was reconstructed (SAP 05-633-05) by the Benton County Highway Dept. The plans for this project show an iron monument with two of the reference ties matching those on Regan's certificate.

On January 6, 1999 Mn/Dot survey crews found a railroad spike at the intersection of the roads to the east, west, and south. Two of the four ties from Regan's certificate existed and distances checked with the found railroad spike. The railroad spike was removed and no other monuments were found. A 3/4" x 12" iron pin was set in place of the railroad spike and new ties made. No accessories to the original government survey were found at this time. On October 25, 1999 the iron pin was replaced with a Harrison type cast iron monument. The Minnesota Department of Transportation accepts the position of the found railroad spike as the correct location for the corner.

For details and survey analysis, contact the Minnesota Department of Transportation District Surveys Office in Baxter, Minnesota.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter _____ Corner of Section 34, Township 37, Range 31, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 6/21/82 found a bolt in center lines of township roads
DATE
east-west and south
 - left monument as found, lowered monument, removed monument (explain)
- On 6/21/82 placed a Benton County cast iron monument
DATE

SKETCH OF REFERENCE TIES

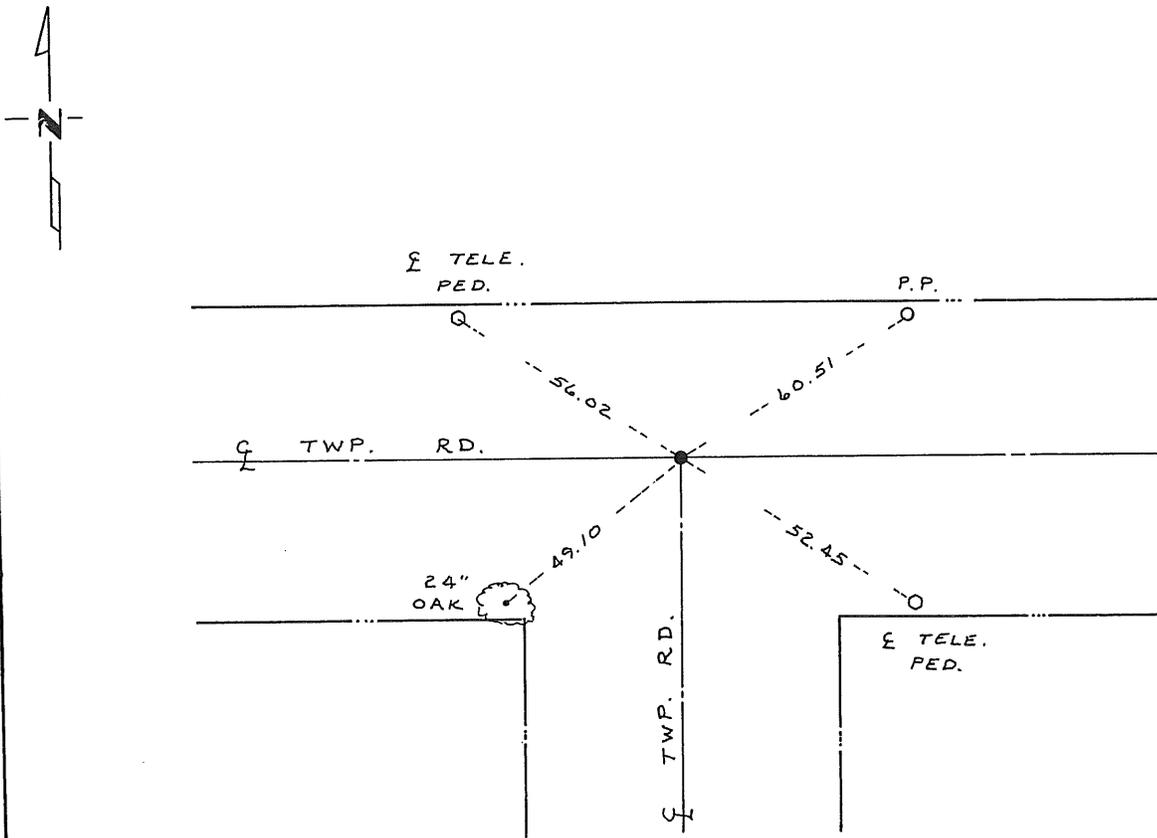

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David P. Regan 7/13/82
SIGNATURE DATE

Registration No. 12236

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS County Recorder
 County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 10 A.M. on the 27 day of July A.D., 1982

Register of Deeds County Recorder F.A. Johnson

By _____, Deputy

DOCUMENT NO. 162604