

Certified, Filed and or Recorded on
Dec. 24, 2008 AT 08:53AM


Signed: BW
MARILYN J NOVAK E V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 36, Township 37, Range 31
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10-9-08 found a CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

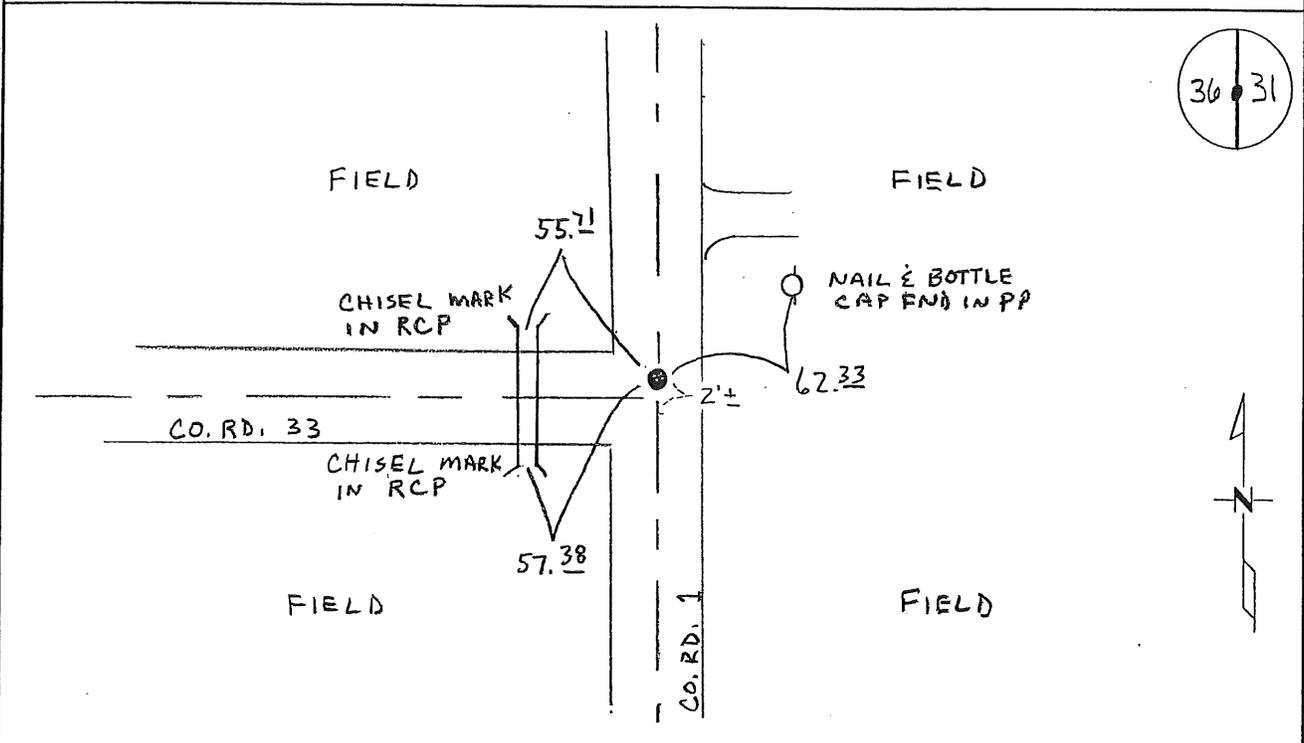

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 12/17/08

Benton County Surveyor's Office
 Chris Hoggund, Deputy County Surveyor
 Minnesota License No. 43932

Statement of Evidence:**F363**

East Quarter Corner of Section 36, Township 37 North, Range 31 West, Watab Township, 4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
 10" Blk. Oak N 65 1/2 E 618 links
- 1938 County Engineers' Notebook No. 116 shows survey of SAR 1 running from south to north. Notes show corner being a spike in center of north-south road and road west. Ties:
 FP NW 39.9'
 15" Oak NE 67.4'
 Stationing gives distances of 2654.8 feet to the SE corner and 2650.7 feet to the NE corner with a delta angle of 0-39' right.
- 1990 Paul Wellen, LS 10461, found a 3/4" pipe at the intersection of County Road 1 (running north and south) and County Road 57 (from the west). He set a cast iron monument over it and filed a Certificate of Location (#202365).
- 2004 Westwood Professional Services, Inc. found a CIM and measured 2655.30 feet to the NE corner and 2659.51 feet to the NE corner.
 County Coordinates obtained by GPS to CIM.
 NAD 83 (1996 Adjustment)
 N-134807.223
 E-478536.502
- 2008 Westwood Professional Services, Inc. found a CIM at the corner location. Only one tie from Wellen Certificate of location remains, and CIM fits this tie. Measured 2659.51 feet to the SE corner and 2655.30 feet to the NE corner which is consistently long (4.71 feet long to SE and 4.61 feet long to NE). CIM is accepted as marking the obliterated position for this corner. County Coordinates obtained by GPS coincide with 2004 position.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST 1/4 Corner of Section 36, Township 37, Range 31, 4 P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 7 AUG 90 found a 3/4" IRON PIPE
DATE

left monument as found, lowered monument, removed monument (explain)

On 7 AUG 90 placed a COUNTY MONUMENT
DATE

SKETCH OF REFERENCE TIES

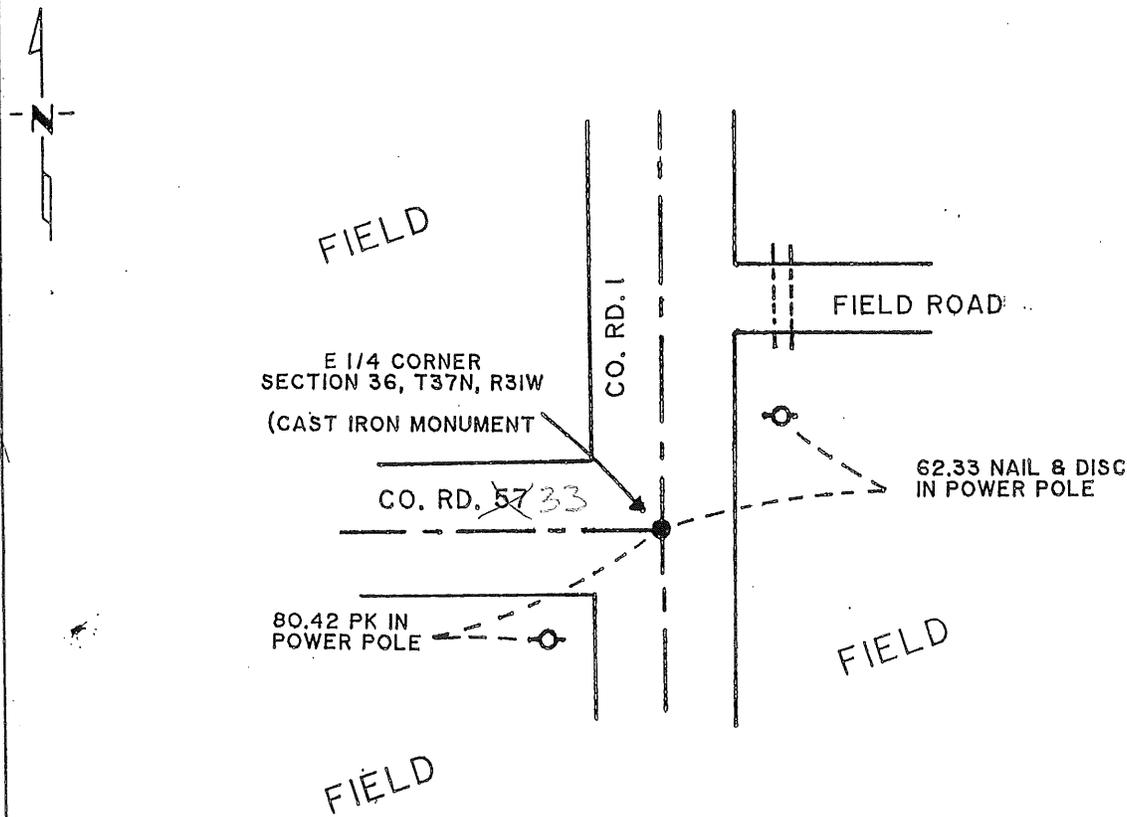

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 11/14/91
SIGNATURE DATE

Registration No. 10461

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

East 1/4 corner, of Section 36, T
37 N, R 31 W, of the 4th Principal Meridian.

1. During the G.L.O. Survey of 1849, Mr. Theodore Conkey, a U.S. Deputy Surveyor, set a wood post to mark this corner.
2. A search of the Benton County Surveyor records provided no further information for the location of this corner.
3. On August 7, 1990, Paul E. Wellen & Associates, Inc., found a 3/4 inch iron pipe in the intersection of the center line of Benton County Road 1 (north-south) and the center line of Benton County Road 57 (west) and placed a cast iron monument at this location. We also established new reference ties as indicated.

BY AL DEPUTY

AUDIE G. HODGSON
COUNTY RECORDER

APR 29 1 48 PM '91

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

202365