

A 364270

Certified, Filed and or Recorded on
Mar. 11, 2009 AT 10:15AM


Signed: [Signature]
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 5, Township 37, Range 31
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 12-3-08 found a CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

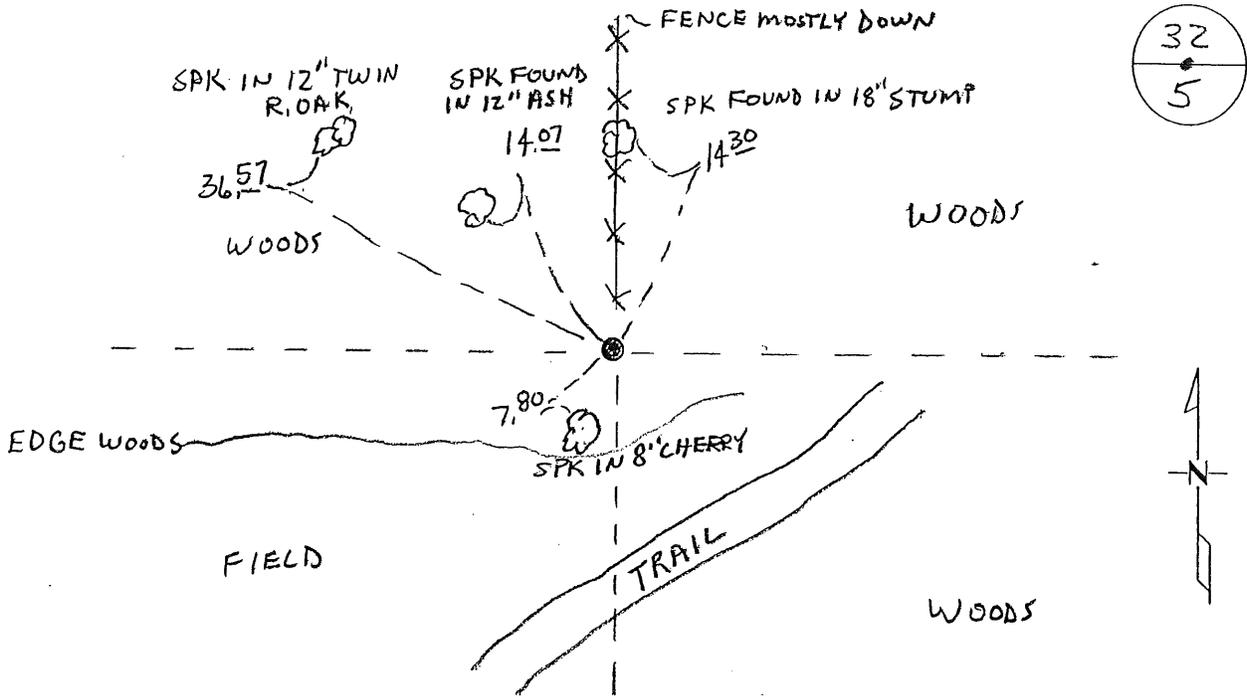

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]
Deputy County Surveyor
License No. 43932

Date: 3/6/09

Statement of Evidence:

F051

North Quarter Corner of Section 5, Township 37 North, Range 31 West, Watab Township, 4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
 12" Bur Oak N 64 E 53 links
 12" Bur Oak S 6 E 46 links
 Line tree was noted as: 10" Tamarack East 28.18 chains
- 1978 William Lunser, LS 9394, set a 1/2" iron pipe at the intersection of a fence line from the north and occupation to the west.
- 1985 William Lunser found the 1/2" iron pipe set in 1978 and replaced it with a cast iron monument and filed a Certificate of Location (#191260). Distances given: 2700.61 feet to the NE corner and 2688.51 feet to the NW corner of Section 5.
- 1990 MN/DNR survey information shows CIM found and measured 2700.66 feet to the NE corner of Section 5.
- 2003 Survey & Engineering Professionals, Inc. obtained coordinates by conventional traverse. County Coordinates:
 NAD 83 (1996 Adjustment)
 N- 164270.121
 E- 454748.550
- 2004 MN/DOT
 County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-164269.572
 E-454748.184
- 2008 Westwood Professional Services, Inc. found a cast iron monument at the corner location. Old fence line north as referred to in 1978 still remains but is mostly down. Measured 2700.81 feet to the NE corner and 2688.51 feet to the NW corner which agrees with Lunser and MN/DNR distances. Three 1985 Lunser ties are still in place and check. CIM is accepted as marking the obliterated position for this corner. Coordinates obtained by GPS coincide with 2004 MN/DOT position.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 5, Township 37, Range 31, 4th. P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9-19-1985 placed a Cast Iron Monument at the intersection of
DATE fence line to the north and occupation line to the west.

SKETCH OF REFERENCE TIES

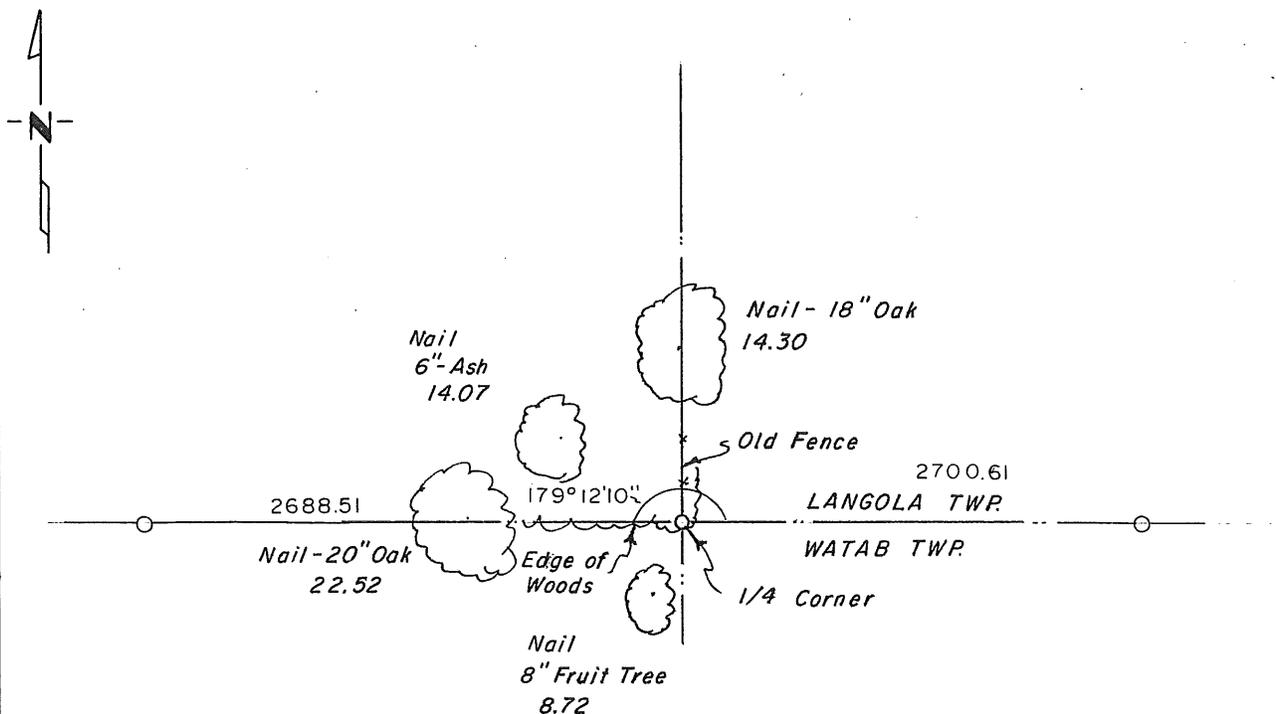

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Lunsar 12/15/88
SIGNATURE DATE

Registration No. 9394

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

9-25-78 Set $\frac{1}{2}$ " iron pipe at the intersection of a fence line to the north and occupation line to the west.

9-19-1985 Found $\frac{1}{2}$ " iron pipe set in 1978 and replaced it with C.I.M.

191260

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 12 12 08 PM '89

ALICE S. ENGBLMEYER
COUNTY RECORDER

BY *[Signature]* DEPUTY