

Certified, Filed and or Recorded on
Nov. 05, 2008 AT 08:33AM


Signed: MJ
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 12, Township 37, Range 31
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10-6-08 found a 1/2" OPEN I.P.
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

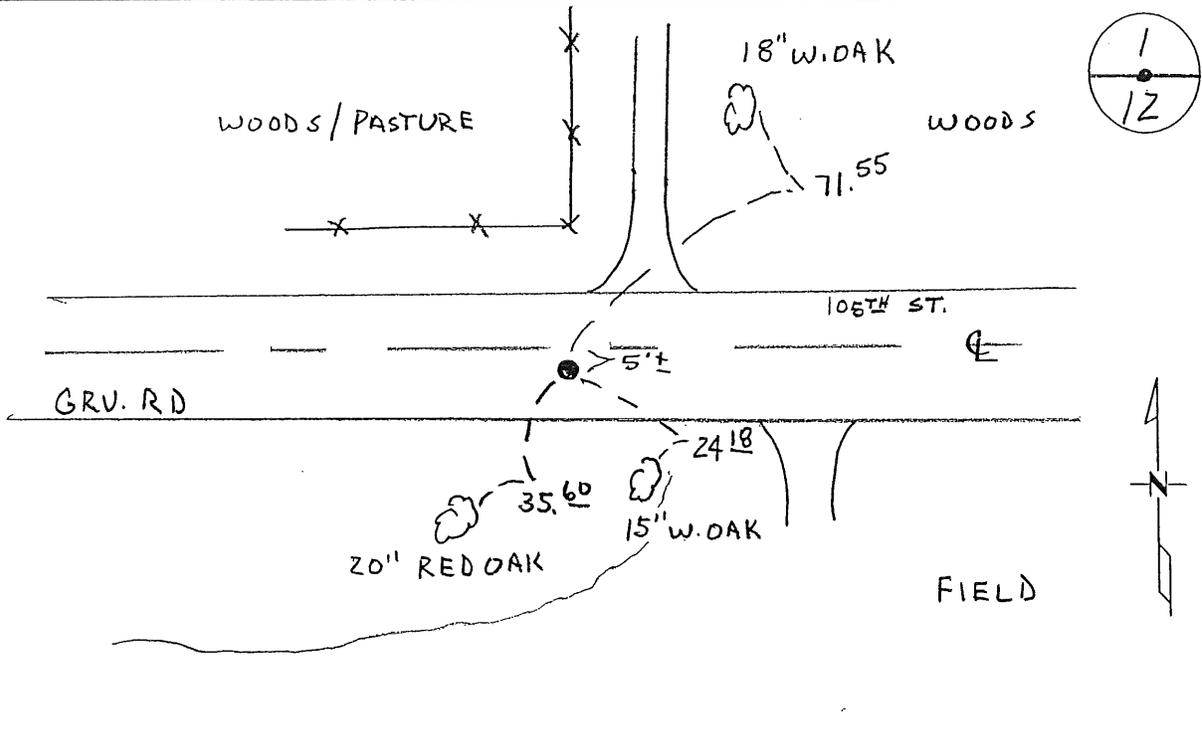

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]
Deputy County Surveyor
License No. 43932

Date: 11/3/08

Statement of Evidence:

F121

North Quarter Corner of Section 12, Township 37 North, Range 31 West, Watab Township, 4th Principal Meridian, Benton County, Minnesota.

- 1850 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|------------|------------|-----------|
| 4" Blk Oak | S 41 1/2 E | 80 links |
| 8" Blk Oak | N 68 W | 377 links |
- 1923 County Surveyor's Record Book 1, page 315, shows a survey of Section 1 by Samuel S. Chute, which notes a post at the corner. It appears he set the corner lost as his notes show a distance of 2760.94 feet to the NW corner of Sec. 12 (Iron Mt) and a distance of 2760.94 feet to the NE corner Sec. 12 (oak post).
- 1961-1968 M.W. Carley, LS 855, reference ties:
- | | | |
|--------------|----|-------|
| 12" Twin Oak | NW | 57.95 |
| 12" Oak | SE | 24.02 |
| 15" Oak | SW | 35.85 |
- 1978 Paul Wellen, LS 10471, found a 1/2" iron pipe 5.0 feet south of the centerline of an east/west road. He filed a Certificate of Location (#151862). His notes give a distance of 2763.79 feet to the NW corner.
- 1982 Wellen's records give distances of 2764.25 feet to the NE corner and 2763.79 feet to the NW corner.
- 2005 Daniel Kron, LS 42621, found 1 1/2" iron pipe and measured 2764.82 feet to the NW corner and 2764.25 feet to the NE corner. Distances confirm that the iron found is the same as set in the 1923 survey.
 County Coordinates obtained by SEPI:
 NAD 83 (1996 Adjustment)
 N- 158895.506
 E- 476166.989
- 2008 Westwood Professional Services, Inc. found a 1 1/2" iron pipe at the corner location. The top of the iron pipe is bent west ~0.5 feet. Position at the base of said pipe fits 1978 Wellen ties and coordinates obtained by GPS coincide with 2005 Kron position. The iron pipe is accepted as marking the obliterated position for this corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

set the North 1/4 Corner of Section 12, Township 37, Range 31, 4 P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 9-21-78 found a 1/2" iron pipe, 5 feet south of the center-line of East-West Township road
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES



Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul E. Hullen _____
SIGNATURE DATE

Registration No. 10461

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

County Recorder
OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the County Recorder office at 10 A.M. on the 26th day of March A.D., 1979
County Recorder
Register of Deeds F. A. Johnson


By _____, Deputy

DOCUMENT NO. 151862

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 21 day of September, 19 78
I did set the North 1/4 corner of Section 12,
Twp. 37, Rg. 31, Benton County, Minnesota, which
was evidenced by a 1/2" iron pipe, 5 feet south of the center-line of
east-west township road.

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of a 1/2" iron pipe and that
I did establish witness or reference monuments as shown below:

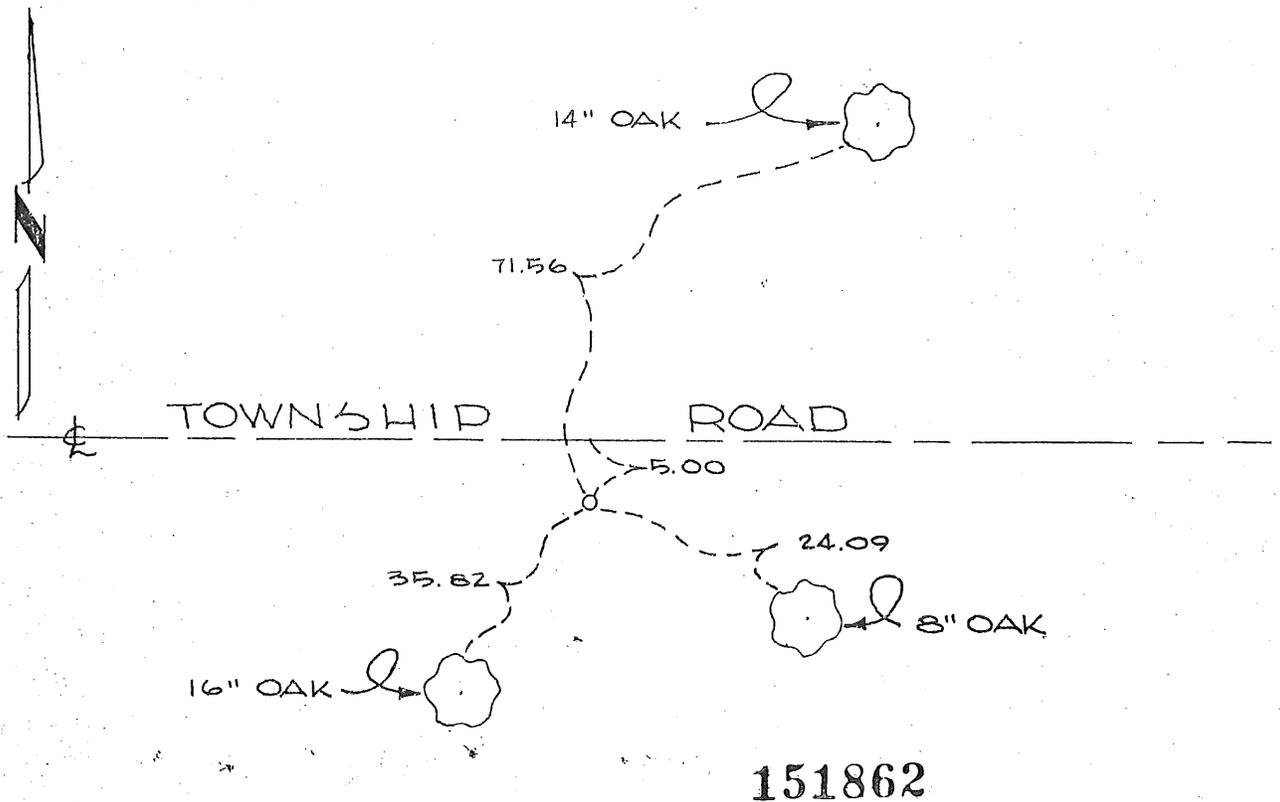

151862

I hereby certify that the above
is true and correct and that I am
a registered Land Surveyor under
the laws of the State of Minnesota.

Paul J. Miller

Minn. Registration No. 10461

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument
was filed for record in this office on the
26th day of March, 19 79
at 10 A.M.

F. A. Johnson
County Recorder

By _____ Deputy.