


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North 1/4 Corner of Section 13, Township 37, Range 31, 4th P.M.
STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain).
- On 10/30/89 placed a Cast iron monument
DATE

SKETCH OF REFERENCE TIES

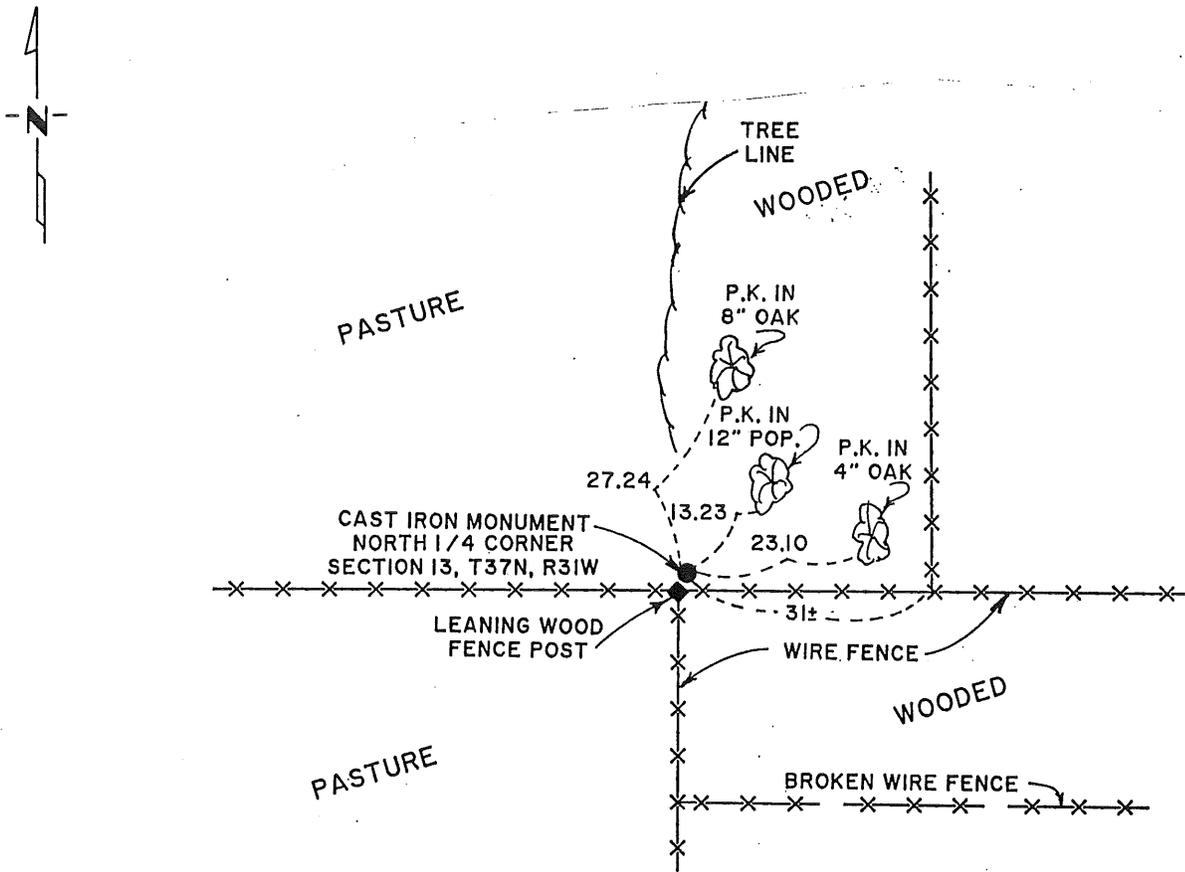

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 12/12/89
SIGNATURE DATE

Registration No. 10461

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of Benton

I hereby certify that this document was filed in the Co. Recorders office at _____ M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

North quarter corner, Section 13, Township 37 North, Range 31 West, of the 4th Principal Meridian.

1. During the G.L.O. Survey of 1850. the John Ryan, a U.S. Deputy Surveyor, set a wood post to mark this corner.
2. On April 21, 1980, David P. Regan, Land Surveyor used a point on the north side of a fence corner for the location of this corner during a survey made in the Southwest Quarter of Section 12, Township 37 North, Range 31 West.
3. On October 30, 1989, Paul E. Wellen & Associates, Inc. searched the area around this fence corner and found nothing, but this location can be substantiated by the iron monuments and distances of the Regan Survey. I set a cast iron monument at this location.

195981

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 11 8 43 AM '90

ALICE G. ENGELMEYER
COUNTY RECORDER

BY Jew DEPUTY