

381036

Certified, Filed and or Recorded on
April 07, 2011 2:52 PM

BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

By: BW
6-1-11


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH Quarter Corner of Section 14, Township 37, Range 31
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
- left monument as found lowered monument removed monument (explain)
- On 3/01/2011 placed an 1/2" X 14" IRON PIPE CAD # 19552 AT 2002
Coordinate position.

* Set mag nail in wood posts
NEXT TO TELEPHONE PED. BOXES

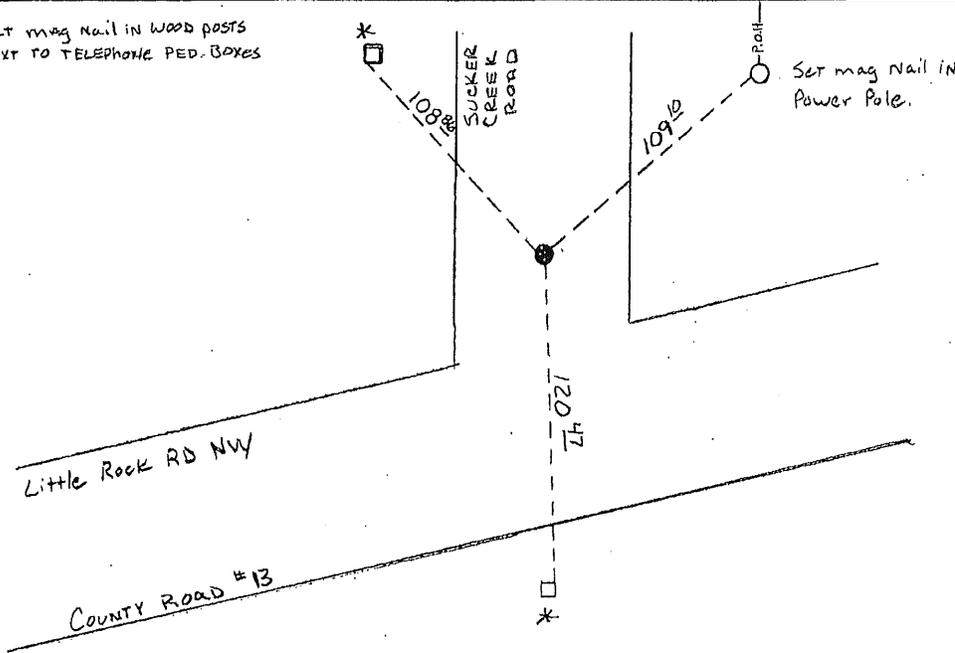

Set mag nail in
Power Pole.

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jerome C. Wittstock
Benton County Surveyor
License No. 19552

Date: 05 April 2011

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:

F141

North Quarter Corner of Section 14, Township 37 North, Range 31 West, Watab Township, 4th Principal Meridian, Benton County, Minnesota.

1850 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

12" Burr Oak S 5 3/4 W 124 links
 8" Burr Oak N 5 W 82 links

This corner is noted on the following recorded plats:

<i>DEERWOOD ESTATES</i>	4/7/1976	Paul E. Wellen
<i>FRALENE ACRES</i>	11/15/1967	Milner W. Carley
<i>OAK HILL ESTATES</i>	2002	Linda Brown

1932 County Surveyor's Record Book 1, page 333, and Engineer's Notebook No. 73 shows road survey by H. G. Elletson. The corner is described as being in center of north-south town road and 95.0 feet South to the centerline of S.A.R. 13.

1982 David Regan, LS 12236, found a 1/2" iron pipe in the centerline of a township road (running north and south) and the westerly extension of the centerline of County Road 13. He removed the 1/2" iron pipe and set a cast iron monument and filed a Certificate of Location (#163362).

2002 Westwood Professional Services, Inc.
 County Coordinates obtained by GPS (Cast Iron Monument)
 NAD 83 (1996 Adjustment)
 N-153482.508
 E-470717.546

2004 MN/DOT
 County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-153482.483
 E-470717.489

2010 The Benton County Surveyor's Office searched the area, but found no evidence of the CIM. A 1/2" by 14" iron pipe capped 19552 was set to mark the position. The GPS coordinates were used to reset the iron and references were established as shown.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter _____ Corner of Section 14, Township 37, Range 31, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 8/12/82 found a $\frac{1}{2}$ inch iron pipe in center line of Twp Rd. DATE
north-south and west extension of center line tangent of C.A.R. #13
 left monument as found, lowered monument, removed monument (explain)
- On 8/12/82 placed a Benton County cast iron monument DATE

SKETCH OF REFERENCE TIES

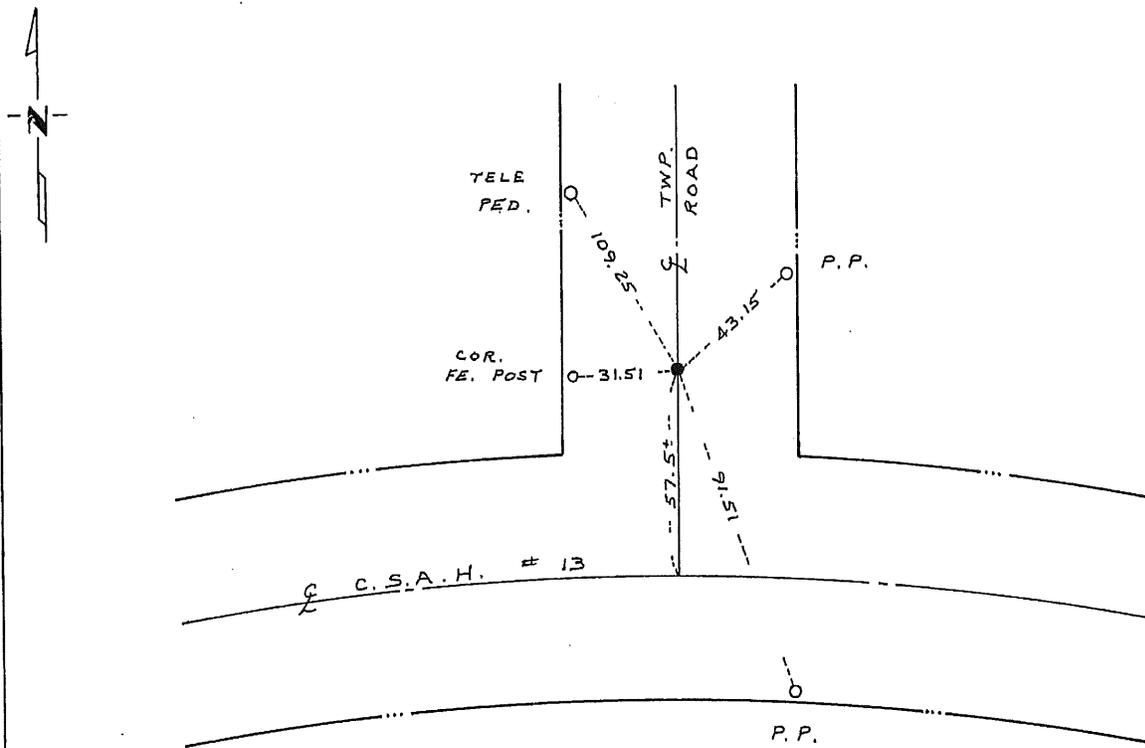

Statement of evidence relative to this corner location is on back of page. **163362**

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David G. Regan 9/1/82
SIGNATURE DATE

Registration No. 12266

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

County Recorder
 OFFICE OF THE REGISTER OF DEEDS
 County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 11 A.M. on the 18th day of October A.D., 1982

County Recorder
 Register of Deeds F.A. Johnson

By _____, Deputy

DOCUMENT NO. _____