

Certified, Filed and or Recorded on  
Nov. 05, 2008 AT 08:32AM

Signed: [Signature]  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 22, Township 37, Range 31  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 9-24-08 found a 1 1/2" SOLID PIN

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

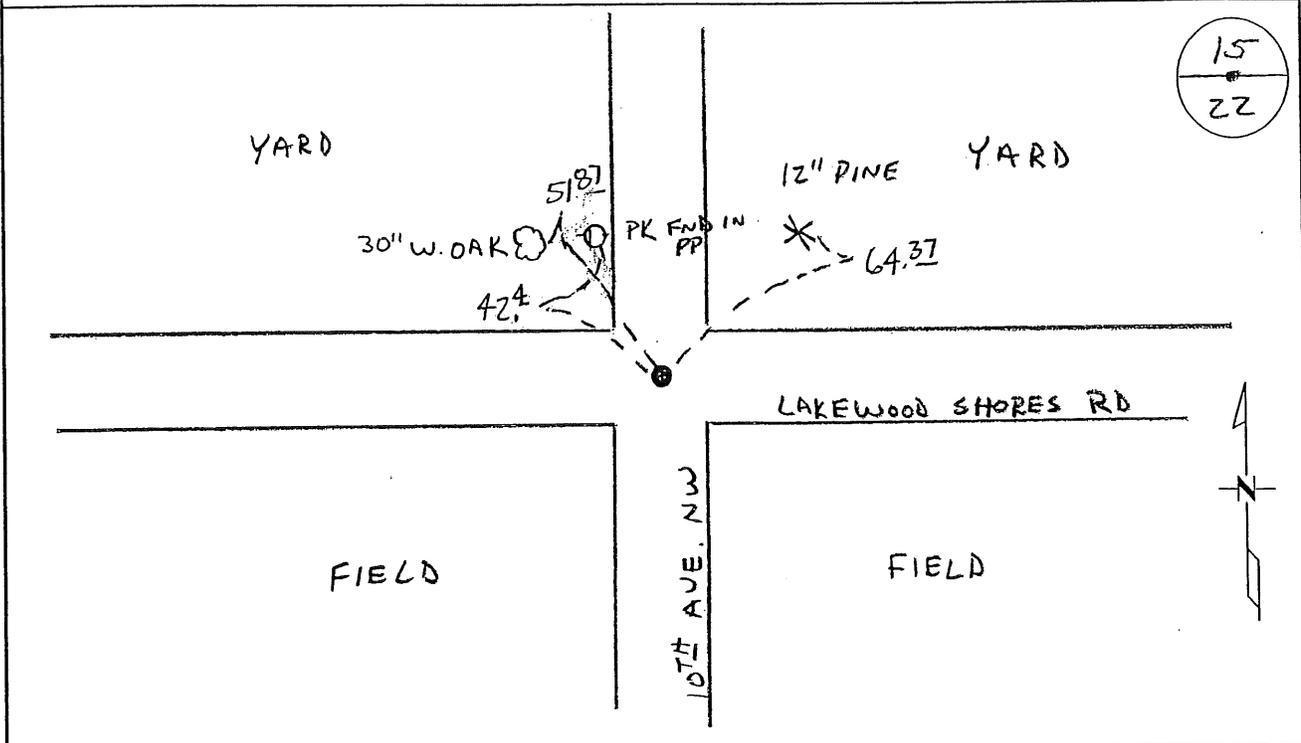

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]  
Deputy County Surveyor  
License No. 43932

Date: 11/3/08

Benton County Surveyor's Office  
Chris Hogleund, Deputy County Surveyor  
Minnesota License No. 43932

**Statement of Evidence:****F221**

North Quarter Corner of Section 22, Township 37 North, Range 31 West, Watab Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1850 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.  

Bur Oak	S 34 E	73 links
Bur Oak	N 27 1/2 E	43 links

This corner is noted on the following recorded plats:

<i>CIRCLE PINES ACRES</i>	7/25/1969	Milner W. Carley
---------------------------	-----------	------------------

No Date County Surveyor's Record Book 1, page 355, shows an iron at the corner with the following reference ties. (Also found in Notebook No. 133 from 1940.)  

15" Oak NW	52.8
8" Oak NW	107.7

No Date Notes for Watab Road No. 3 show pipe with ties:

24" Oak NW	51.4'
PP NW	42.4'
Tel. Ped.NE	32.4'

1971 County information shows the corner is at the centerline of a north/south and east/west road with the following reference ties:

Round Conc. Pillar	NE	26.90
28" Oak (face tie)NW	51.96	
6" W. Oak	NNW	116.19

1978 Paul Wellen, LS 10461, found a 1/2" pipe at the intersection of the centerline of a township road north/south and east/west. He filed a Certificate of Location (#151866). Ties to 3 Pine trees.

1981 County information shows a solid 1" steel pin marked the corner with the following reference ties.

N&D 24" Oak	WNW	51.87
N&D 8" Pine	NNE	64.37
Center of Round Concrete Pillar	NE	26.90

2001 Brown Herkenhoff, Inc. notes a found 1 1/2" iron pin at the corner. Measured 2661.01 feet to the NW corner and 2657.23 feet to the NE corner of Section 22.

2003 Westwood Professional Services, Inc. found a 1 1/2" square iron pin.

County Coordinates obtained by GPS  
NAD 83 (1996 Adjustment)  
N-148121.098  
E - 465466.360

2004 MN/DOT

County Coordinates obtained by GPS  
NAD 83 (1996 Adjustment)  
N-148121.149  
E-465466.278

2008 Westwood Professional Services, Inc. found a 1 1/2" square iron pin fitting two of the 1981 ties and coordinates obtained by GPS coincide with 2004 MN/DOT position. Measured 2661.00 feet to the NW corner and 2657.45 feet to the NE corner of Section 22. 1 1/2" square iron pin is accepted as marking the obliterated position for this corner.

10/15/2008

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North 1/4 Corner of Section 22, Township 37, Range 31, 4 P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On 10-3-78 found a 1/2" iron pipe, at the intersection of the center line of North-Danish Twp. road & the center line of east-west Twp. road  
DATE  
 left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a 1/2" iron pipe  
DATE

### SKETCH OF REFERENCE TIES



*Refer to next page*

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul E. Skellen \_\_\_\_\_  
SIGNATURE DATE

Registration No. 10461  
 Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

County Recorder  
OFFICE OF THE REGISTER OF DEEDS  
County of Benton


I hereby certify that this document was filed in the Reg. of Deeds office at 10:4 A.M. on the 26th day of March A.D., 1979

Register of Deeds F.A. Johnson  
By County Recorder, Deputy  
DOCUMENT NO. 151866

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 2 day of October, 1978  
I did set the North 1/4 corner of Section 22,  
Twp. 37, Rg. 31, Benton County, Minnesota, which  
was evidenced by a 1/2" iron pipe, at the intersection of the center  
line of north-south township road and the center line of east-west township  
road.

I further certify that in order to perpetuate said corner I did  
at the exact location thereof place a permanent marker consisting  
of a 1/2" iron pipe and that  
I did establish witness or reference monuments as shown below:

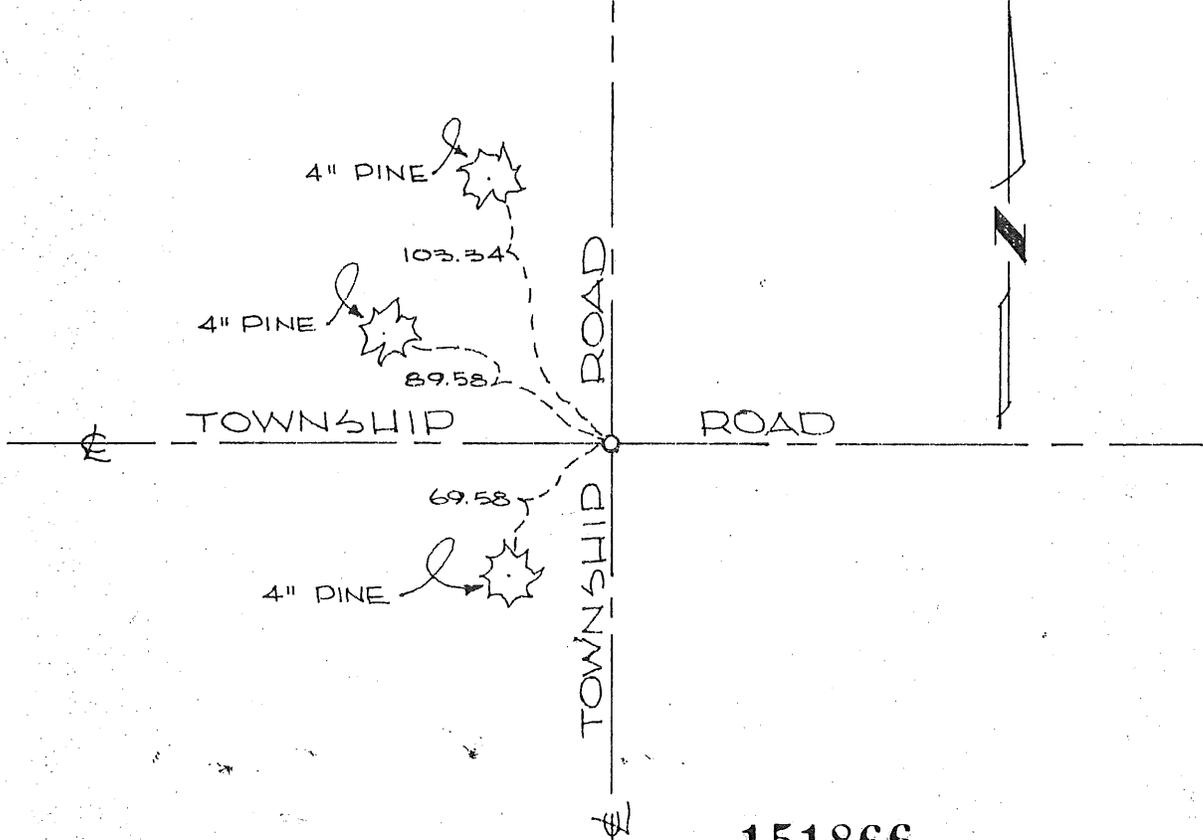

I hereby certify that the above  
is true and correct and that I am  
a registered Land Surveyor under  
the laws of the State of Minnesota.

Paul Miller

Minn. Registration No. 10461

Office of the County Recorder,  
Benton County, Minn.

I hereby certify that the within instrument  
was filed for record in this office on the  
26th day of March, 1979  
at 10 A.M.

F.A. Johnson  
County Recorder

By \_\_\_\_\_ Deputy.