

Certified, Filed and or Recorded on  
Nov. 05, 2008 AT 08:22AM

Signed: Ju  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER


### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 26, Township 37, Range 31  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10-9-08 found a CAST IRON MONUMENT

left monument as found       lowered monument       removed monument (explain)  
 On \_\_\_\_\_ placed an \_\_\_\_\_

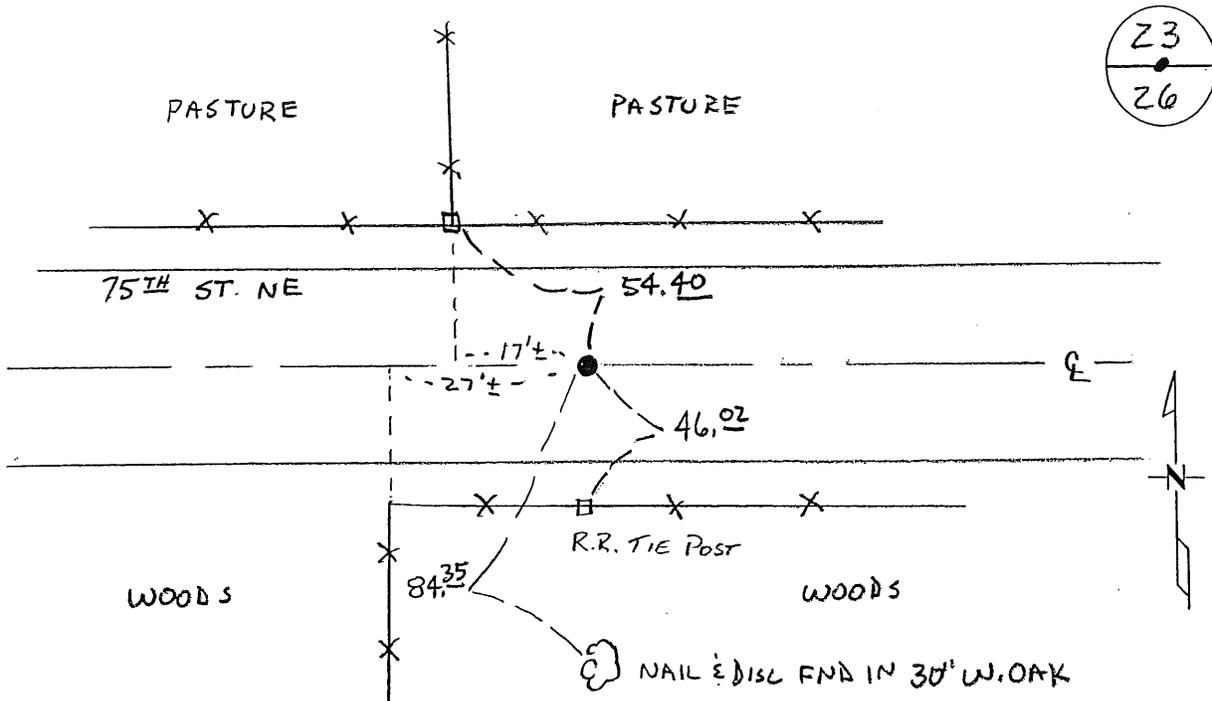

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy County Surveyor  
License No. 43932

Date: 11/3/08

Benton County Surveyor's Office  
 Chris Hoglund, Deputy County Surveyor  
 Minnesota License No. 43932

**Statement of Evidence:**

F261

North Quarter Corner of Section 26, Township 37 North, Range 31 West, Watab Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1850 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- |             |        |           |
|-------------|--------|-----------|
| 10" Bur Oak | S 35 E | 106 links |
| 14" Bur Oak | N 27 E | 353 links |
- 1939 County Engineer's notebook No. 112 contains a road survey by H. G. Elletson for SAR No. 4. Corner is shown marked by an iron with ties:
- |           |       |        |
|-----------|-------|--------|
| 15" Oak   | South | 38.05' |
| 8" R. Oak | SW    | 59.7'  |
- Stationing gives distances of 2644.5 feet to the NW corner and 2650.0 feet to the NE corner of Section 26. Notes show corner 17.3 feet east of fence line north-south.
- 1946 MN/DOT alignment map for TH 10 shows distance of 2645.2 feet to the NW corner of Section 26.
- 1963 County Engineer's Notebook No. 237 contains survey for CSAH 4 running west to east on section line. Notes show corner marked by an iron in center of road with ties:
- |            |    |         |
|------------|----|---------|
| 18" W. Oak | S  | 84.3'   |
| 12" W. Oak | SE | 113.35' |
- Stationing gives distance of 2651.0 feet to the NE corner. Notes show fence line south 25 feet west and fence line north 16 feet west.
- 1982 David Regan, LS 12236, found a RR Spike in the centerline of a road east/west and 19.0 feet east of a fence line north. He replaced it with a cast iron monument and filed a Certificate of Location (162603).
- 2004 Westwood Professional Services, Inc. found CIM and measured 2645.06 feet to the NW corner and 2649.82 feet to the NE corner. Position agrees with 1939 location. County Coordinates obtained by GPS to CIM.  
 NAD 83 (1996 Adjustment)  
 N-142799.252  
 E-470688.110
- 2004 MN/DOT  
 County Coordinates obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-142799.338  
 E-470688.076
- 2008 Westwood Professional Services, Inc. found CIM and measured 2645.06 feet to the NW corner and 2649.82 feet to the NE corner. Position agrees with 1939 location. CIM also fits two of the found ties from 1982 Regan Certificate of Location #162603. CIM is accepted as marking the obliterated position for this corner. County Coordinates obtained by GPS coincide with 2004 Westwood Professional Services, Inc. position.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter \_\_\_\_\_ Corner of Section 26, Township 37, Range 31, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 6/21/82 found a railroad spike in center line of east-west  
County road, 19 feet east of fence line to north  
 left monument as found,  lowered monument,  removed monument (explain)
- On 6/21/82 placed a Benton County cast iron monument

### SKETCH OF REFERENCE TIES

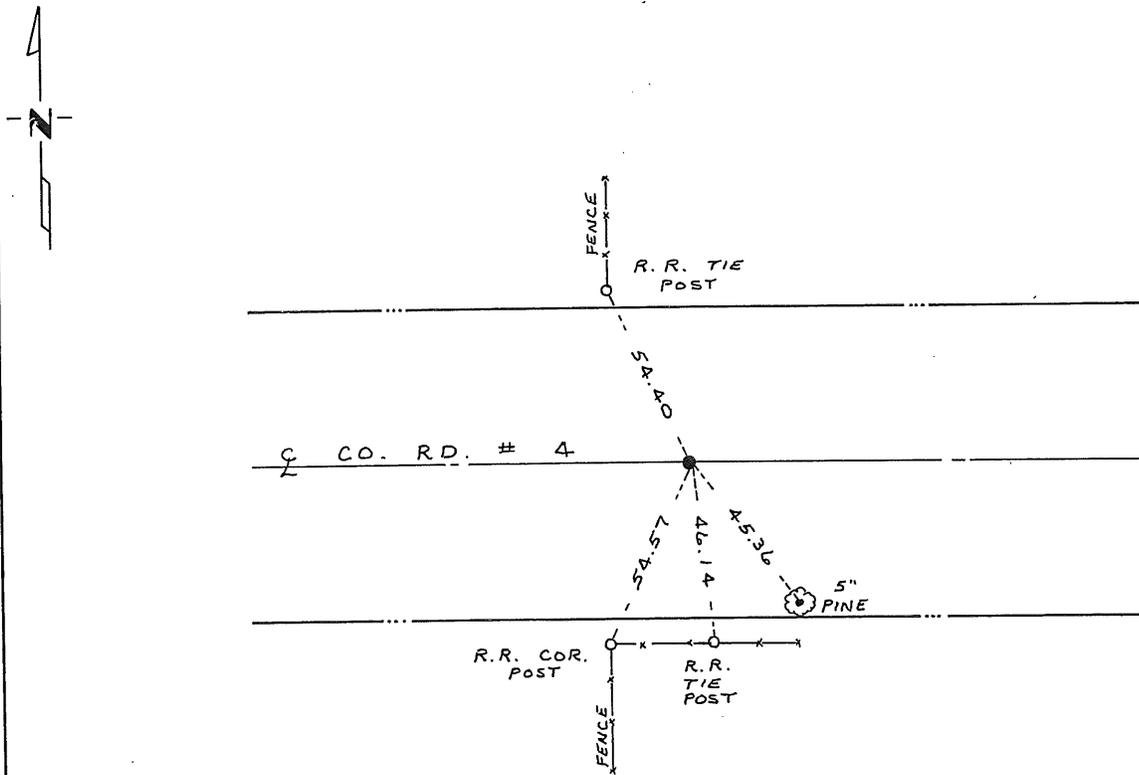

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David J. Ryan 7/13/82  
SIGNATURE DATE

Registration No. 12236

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS ~~County Recorder~~  
 County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 10 A.M. on the 27 day of July A.D., 1982

Register of Deeds F. A. Johnson

By \_\_\_\_\_, Deputy

DOCUMENT NO. 162603