

265886

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

MAY 5 8 19 AM '00

ALICE Q. ENGELMEYER
COUNTY RECORDER

BY *Alice Engelmeier*

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 34, Township 37, Range 31
4th Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

On 7/26/99 found a POINTED GRANITE STONE (1.0' by 1.4') PROTRUDING 1.5' ABOVE
DATE THE GROUND SURFACE.

left monument as found lowered monument removed monument (explain)

On _____ placed a _____
DATE

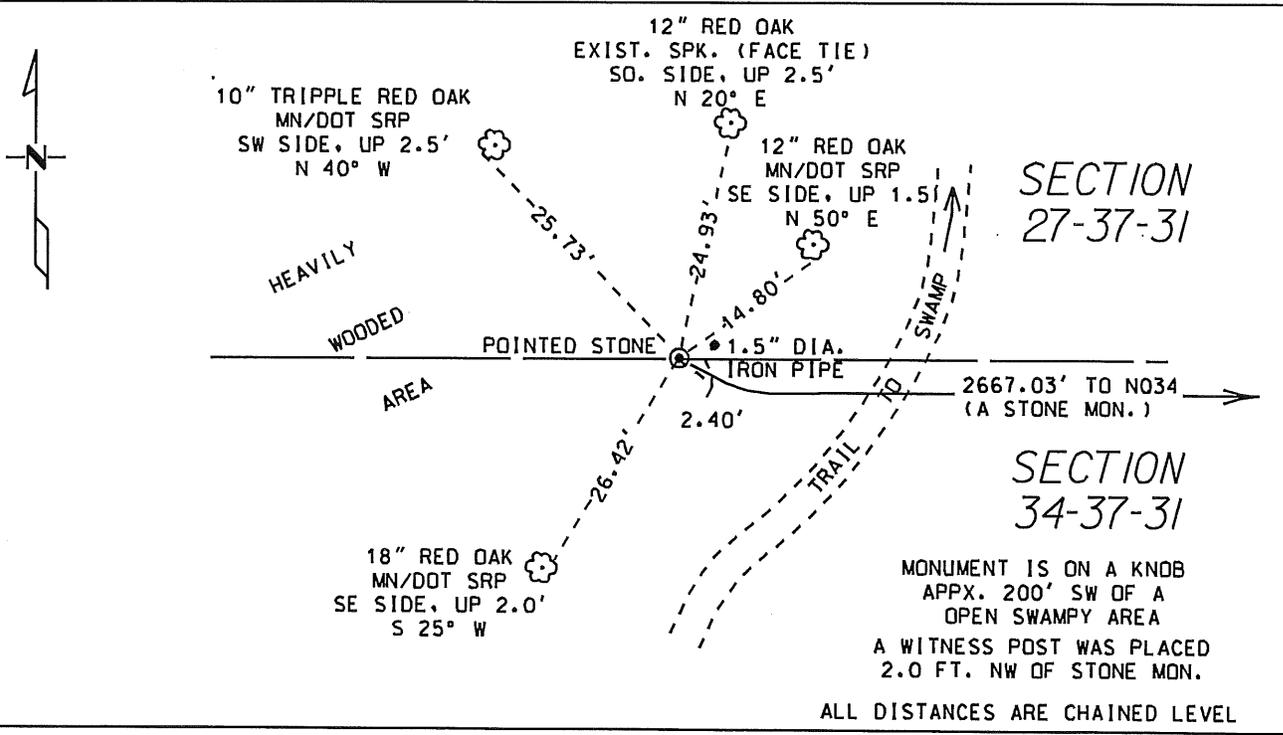

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

Signature *Jamer Kramer* Date 4-5-2000 License No. 23668
Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

North Quarter Corner Section 34, Township 37 North, Range 31 West.

Theodore Conkey and John Ryan ran the original public land surveys in 1849 and 1850. A wood post was set to mark the corner. Bearing tree ties were made to two 10" black oak trees.

A pre-1920 right of way map and track map of the Northern Pacific Railway, St. Paul Division -Main Line shows angles and distances referenced to the railway and to the North Quarter corner and the Northeast corner of said Section 34. These values were checked in a 1962 survey of M. W. Carley & Associates whom deemed the location of a found stone monument to be in accordance with the values of the said railway map.

In 1960, Mn/ Dot survey crews found and surveyed a pointed stone at the intersection of fences to the south and to the west. The location of the monument was tied to the centerline of TH 10.

In 1999, Mn/ Dot survey crews recovered a 1.5 inch dia. iron pipe 1.5 feet east of a pointed stone at the intersection of fences to the south and to the west. Also recovered was one reference tie to a tree as described on the certificate for this corner by William Lunser, RLS as recorded on April 17th, 1981, Doc. #158869. No accessories to the original government survey were found at this time. A 1999 survey of in place TH 10 alignment and the found stone confirm its location as referenced in the TH 10 right of way map as surveyed in 1960. The Minnesota Department of Transportation accepts the position of the found stone monument as the correct location for the corner. The found 1.5 inch dia. iron pipe was left in place.

For details and survey analysis, contact the Minnesota Department of Transportation District Surveys Office in Baxter, Minnesota.


0005-2-14

MINN
AS NIA

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 8th day of November, 1982
I did Find the Meander corner of Section 34,
Twp. 37, Rg. 31, BENTON County, Minnesota, which
was evidenced by 1/2" IRON Pipe

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of BENTON County Cast IRON Monument and that
I did establish witness or reference monuments as shown below:

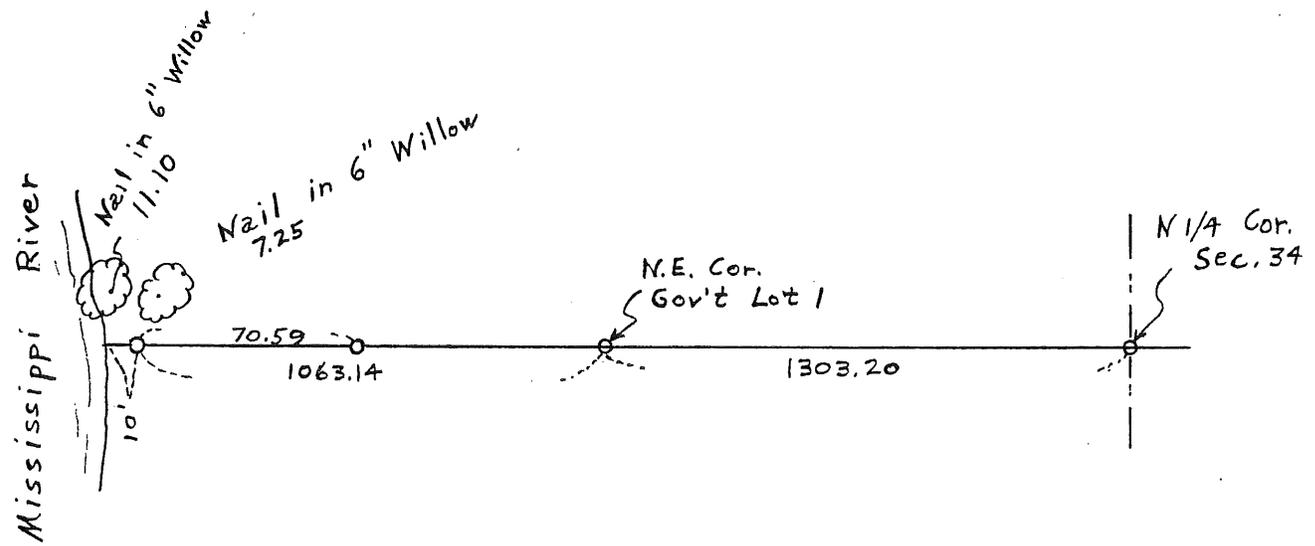

2071
30 3/31

173436

I hereby certify that the
above is true and correct
and that I am a registered
Land Surveyor under the laws
of the State of Minnesota.

Walter P. Linn

Minn. Registration No. 9394

Office of the County Recorder
Benton County, Minn.

I hereby certify that the within
instrument was filed for record
in this office on the 16th day of
May, 1985 at


Alice C. Engelmeier 3:00 PM
County Recorder

By _____ Deputy.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 5th day of August, 1980
I did Find the North Quarter corner of Section 34,
Twp. 37, Rg. 31, BENTON County, Minnesota, which
was evidenced by 1 1/2 inch iron pipe 1.5 feet east of a
pointed stone. Fence line runs west and south from monument.

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of left as found and that
I did establish witness or reference monuments as shown below:

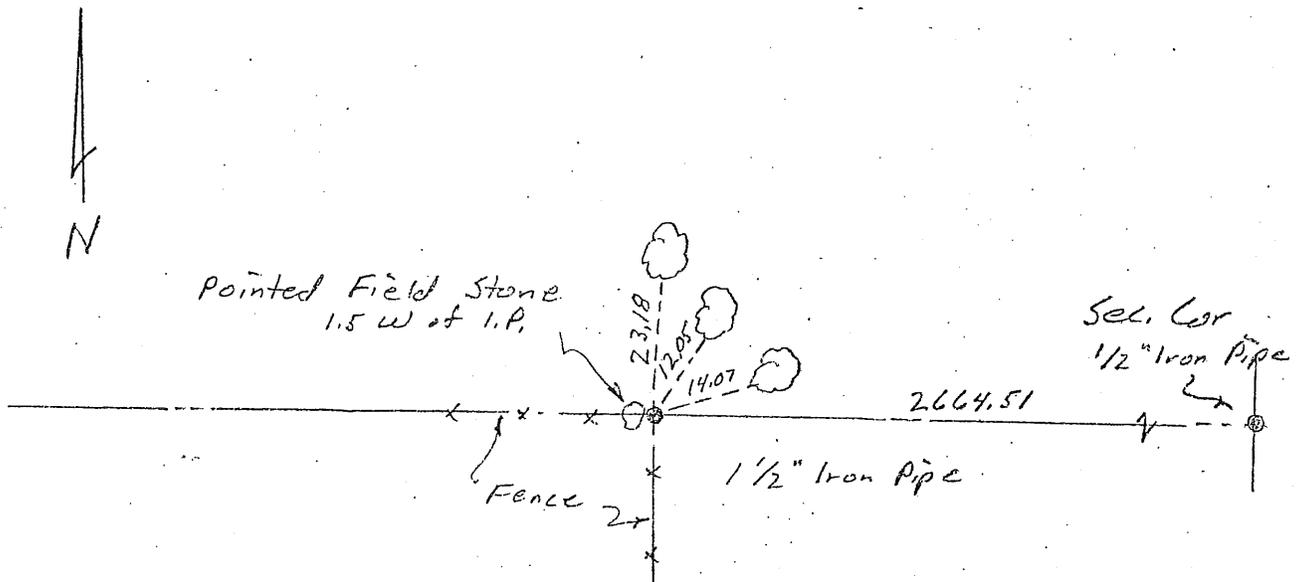

158869

I hereby certify that the
above is true and correct
and that I am a registered
Land Surveyor under the laws
of the State of Minnesota.

William P. L...

Minn. Registration No. 9394

Office of the County Recorder
Benton County, Minn.

I hereby certify that the within
instrument was filed for record
in this office on the 7th day of
April, 1981. 3 P.M.

F.A. Johnson
County Recorder

By _____ Deputy.