

Certified, Filed and or Recorded on
Mar. 11, 2009 AT 10:20AM



Signed: [Signature]
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 35, Township 57, Range 31
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 12-8-08 found a CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

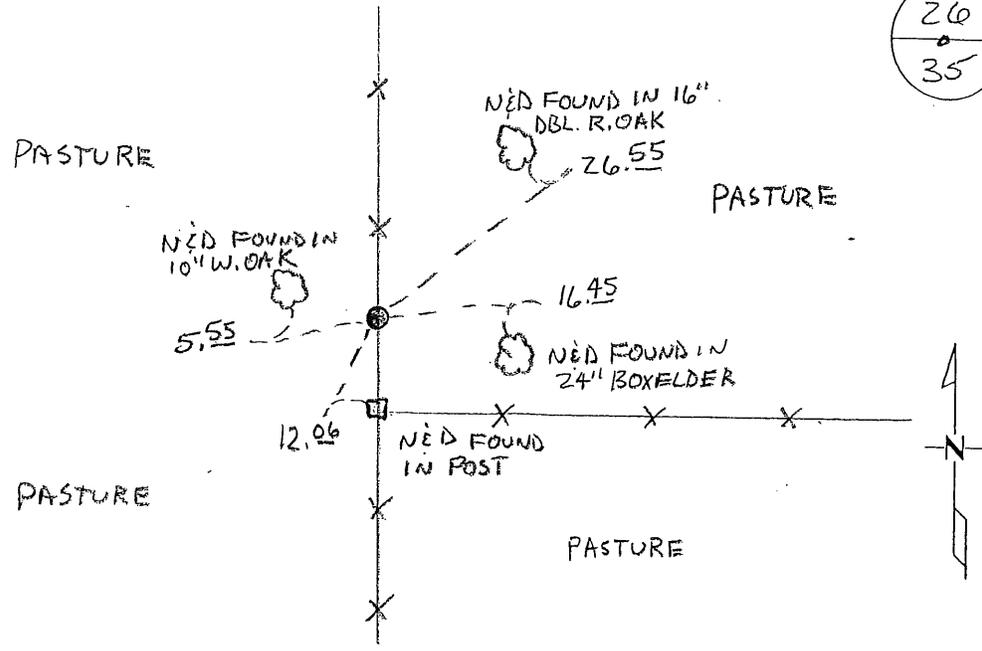

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]
Deputy County Surveyor
License No. 43932

Date: 3/6/09

Benton County Surveyor's Office
 Chris Hoglund, Deputy County Surveyor
 Minnesota License No. 43932

Statement of Evidence:

F351

North Quarter Corner of Section 35, Township 37 North, Range 31 West, Watab Township, 4th Principal Meridian, Benton County, Minnesota.

- 1850 Original US General Land Office surveyor, John Ryan, set a wood post at this location and bearing trees were recorded.
- | | | |
|--------------|------------|-----------|
| 8" Burr Oak | S 59 E | 80 links |
| 10" Blk. Oak | N 79 1/2 E | 136 links |
- 1980 William Lunser, LS 9394, set a 1/2" iron pipe on line from the NW corner of the section through the 1/16 corner, an old fence corner, and then doubling the distance. Testimony of a long time resident stated that the fence at the 1/16 has been held as correct. Shows corner 2660.08 feet east of the NW corner. A Certificate of Location (#158871) was filed.
- 2000 Westwood Professional Services, Inc. found a 1/2" iron pipe with a broken cap at the corner location, which fit Lunser's ties.
 Approximate County Coordinates
 NAD 83 (1996 Adjustment)
 N-137478
 E- 470613
- 2002 No resurvey information was been found on this corner in the Benton County Public Works records.
- 2004 In May, found a MN/DOT cast iron monument at the corner. Measured 2660.06 feet to the NW corner and 2654.12 feet to the NE corner. CIM is 14.8 feet north and 3.0 feet east of the lost position. Corner is accepted as marking the obliterated corner position. In July revisited corner and found the CIM had been removed. Dug down and found iron pipe and set another CIM over the pipe at the same coordinates.
 County Coordinates obtained by GPS to CIM.
 NAD 83 (1996 Adjustment)
 N-137478.690
 E-470612.242
 Certificate of Location filed 7/27/04 as Document No. 316966.
- 2008 Westwood Professional Services, Inc. found a cast iron monument at the same coordinates and distances observed in 2004. CIM is accepted as marking the obliterated position for this corner.

BY BW DEPUTY xm

316966

2004 JUL 27 P 2:28

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 35, Township 37, Range 31


4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

On 7/16/2004 found a 1/2" IRON PIPE BASED ON CERTIFICATE OF LOCATION
DATE
FILED IN 1981 AS DOC. NO. 158871

left monument as found lowered monument removed monument (explain)

On 7/16/2004 placed a CAST IRON MONUMENT
DATE

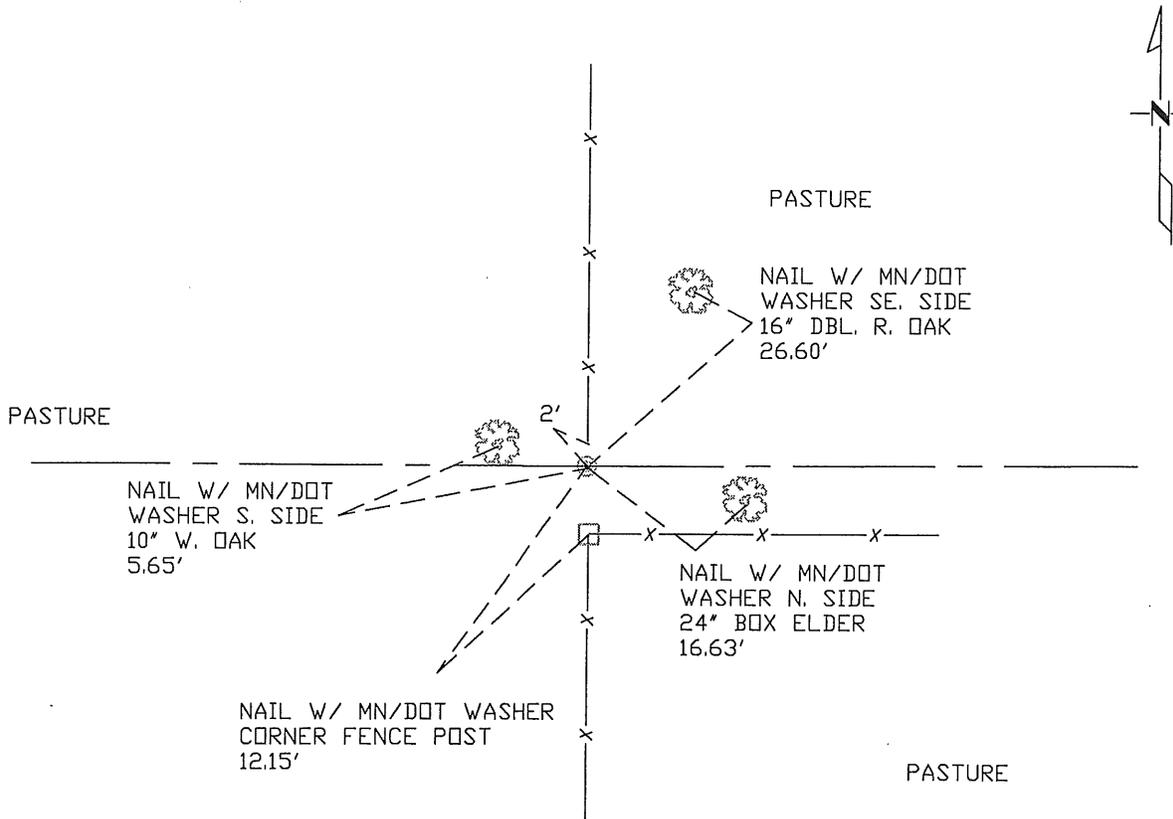

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature] Date 7/22/04 License No. 12684

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Benton County Surveyor's Office
Gary H. Stevenson, County Surveyor
Minnesota License No. 12684

Statement of Evidence:


F351

The North Quarter Corner of Section 35, Township 37 North, Range 31 West, Watab Township, 4th Principal Meridian, Benton County, Minnesota.

- 1850 Original US General Land Office surveyor, John Ryan, set a wood post at this location and bearing trees were recorded.
8" Burr Oak S 59 E 80 links
10" Blk. Oak N 79 1/2 E 136 links
- 1980 William Lunser, LS 9394, set a 1/2" iron pipe on line from the NW corner of the section through the 1/16 corner, an old fence corner, and then doubling the distance. Testimony of a long time resident stated that the fence at the 1/16 has been held as correct. Shows corner 2660.08 feet east of the NW corner. A Certificate of Location (#158871) was filed.
- 2000 Westwood Professional Services, Inc. found a 1/2" iron pipe with a broken cap at the corner location, which fit Lunser's ties.
Approximate County Coordinates
NAD 83 (1996 Adjustment)
N-137478
E- 470613
- 2002 No resurvey information was been found on this corner in the Benton County Public Works records.
- 2004 In May, found a MN/DOT cast iron monument at the corner. Measured 2660.06 feet to the NW corner and 26540.12 feet to the NE corner. CIM is 14.8 feet north and 3.0 feet east of the lost position. Corner is accepted as marking the obliterated corner position. In July revisited corner and found the CIM had been removed. Dug down and found iron pipe and set another CIM over the pipe at the same coordinates.
County Coordinates obtained by GPS to CIM.
NAD 83 (1996 Adjustment)
N-137478.690
E-470612.242

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 5th day of August, 1980
 I did locate the North Quarter corner of Section 35,
 Twp. 37, Rg. 31, BENTON County, Minnesota, which
 was evidenced by extending line from section corner to west,
easterly across 1/16 corner, an old fence corner, and doubling
the distance. Floyd Erdmann, long time resident of township
stated that fence at 1/16th cor had long been held as correct
~~whereas fence at 1/4 cor. was recently erected without (continued)~~
 I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of 1/2 inch iron pipe and that
 I did establish witness or reference monuments as shown below:
 (continued) survey or knowledge of corner location.

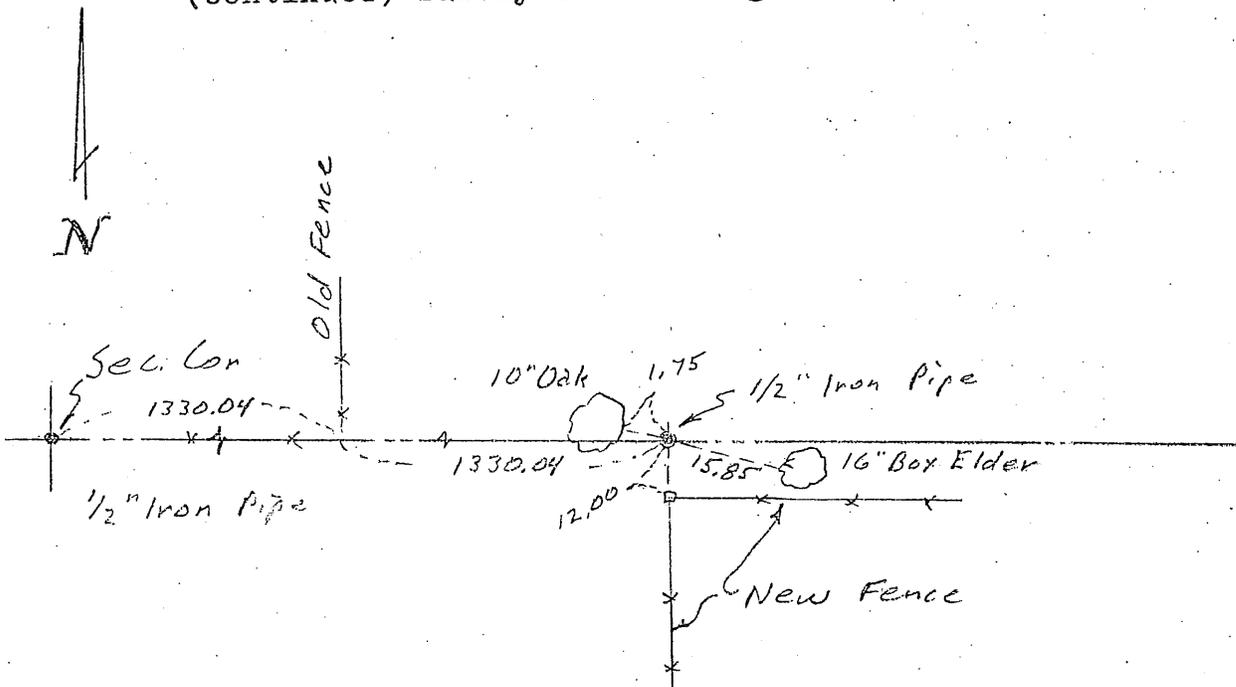

158871

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

William F. Lerner

Minn. Registration No. 9394

Office of the County Recorder
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 7th day of April, 1981. 3 P.M.

F.A. Johnson
 County Recorder

By _____ Deputy.