

Certified, Filed and or Recorded on  
Mar. 10, 2009 AT 01:11PM


Signed: CK  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 36, Township 37, Range 31  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 12-8-08 found a CAST IRON MONUMENT
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

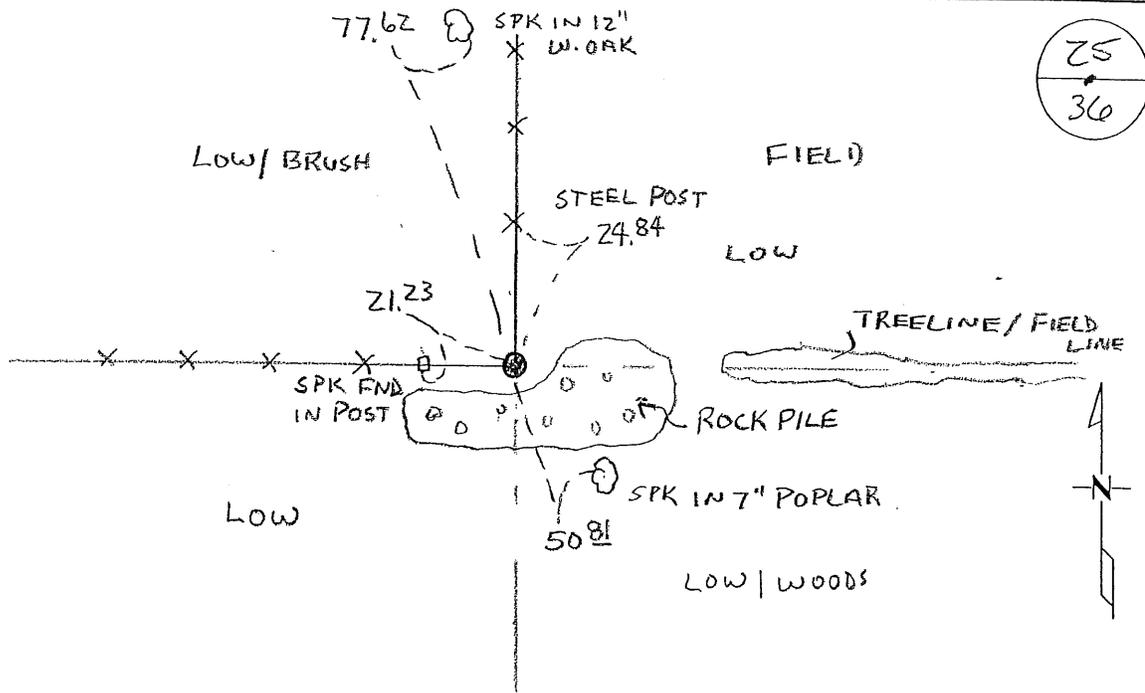

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Ch. Hynd  
Deputy County Surveyor  
License No. 43932

Date: 3/6/09

Benton County Surveyor's Office  
Chris Hoglund, Deputy County Surveyor  
Minnesota License No. 43932

**Statement of Evidence:**

**F361**


North Quarter Corner of Section 36, Township 37 North, Range 31 West, Watab Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1850 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.  
10" Blk Oak                      N 15 W                      352 links
- 1982 On July 15, 1982 William Lunser, LS 9394, found a 1/2" iron pipe and replaced it with a cast iron monument and filed a Certificate of Location (#173437). He notes a distance of 2660.29 feet to the NW Corner of Section 36.
- 2003 Surveying & Engineering Professionals found a CIM. They measured 2654.97 feet to the NE corner and 2660.44 feet to the NW corner of Section 36. Corner is 6.7 feet south 2.9 feet east of the lost position.
- 2004 County Coordinates obtained by GPS to CIM.  
NAD 83 (1996 Adjustment)  
N-137452.866  
E-475926.676
- 2008 Westwood Professional Services, Inc. found a cast iron monument at the intersection of fence lines north and west and a tree line east. Measured 2660.41 feet to the NW corner and 2655.00 feet to the NE corner of Section 36 which agrees with 1982 Lunser and 2003 Surveying & Engineering Professionals distances. CIM is accepted as marking the obliterated position for this corner. Coordinates obtained by GPS coincide with 2004 position.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 15 day of July, 1982  
I did Find \_\_\_\_\_ the North Quarter corner of Section 36,  
Twp. 37, Rg. 31, Benton County, Minnesota, which  
was evidenced by a 1/2" iron pipe

I further certify that in order to perpetuate said corner I did  
at the exact location thereof place a permanent marker consisting  
of Benton County Cast Iron Monument and that  
I did establish witness or reference monuments as shown below:

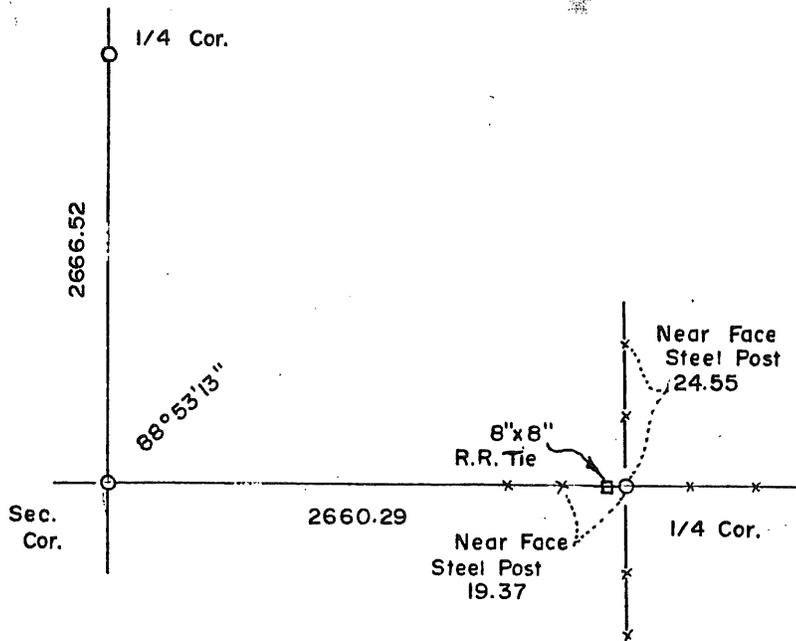

*1/4 Cor.  
2666.52  
NE NW  
NW NE  
36-37-31*

173437

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

*William F. Larson*

Minn. Registration No. 9394

Office of the County Recorder  
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 16<sup>th</sup> day of May, 1982 at 3:00 PM

*Alide C. Engelmeier*  
County Recorder

By \_\_\_\_\_ Deputy.