

Certified, Filed and or Recorded on  
Oct. 31, 2008 AT 08:29AM

Signed: M  
MARILYN J NOVAK G V  
BENTON COUNTY MINNESOTA  
MARTIN T MUDOK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER



NORTHEAST Corner of Section 5, Township 37, Range 31  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 8-27-08 found a CAST IRON MON

left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

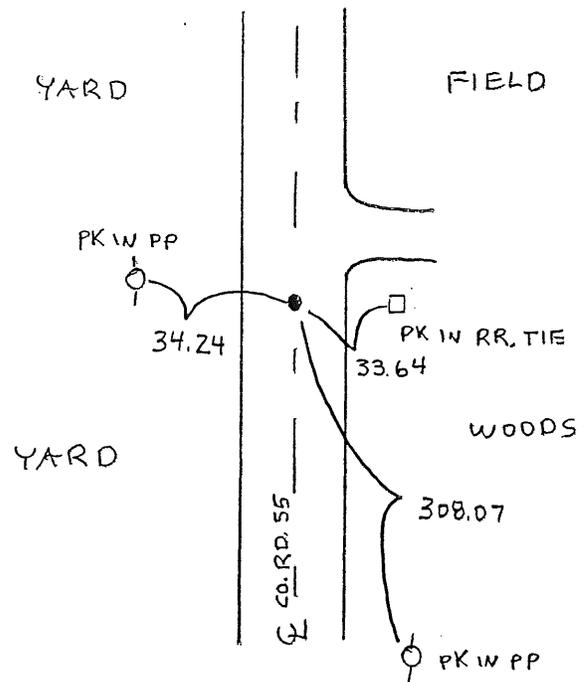

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy County Surveyor  
License No. 43932

Date: 10/14/08

**Statement of Evidence:**

**F052**

Northeast Corner of Section 5, Township 37 North, Range 31 West, Watab Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded:
- |             |            |           |
|-------------|------------|-----------|
| 10" Bur Oak | N 39 W     | 140 links |
| 8" Bur Oak  | S 56 1/2 W | 118 links |
- 1972 On August 25, 1972 William Lunser, LS 9394, set a RR spike at the centerline of County Road 55 and using the testimony of Mr. Graves (the landowner to the south). He filed a Certificate of Location (#133440) and notes a distance of 2677.29 feet to the North 1/4 Corner of Sec 4.
- 1985 On September 19, 1985 William Lunser notes a distance of 2700.61 feet to the North 1/4 Corner of Sec 5 (cast iron monument) per Doc. No. 191260.
- 1985 On October 4, 1985 William Lunser found a RR spike at the centerline of County Road 55 and replaced it with a cast iron monument and filed a Certificate of Location (#191261). He notes a distance of 2659.40 feet to the E 1/4 Corner of 32-38-31.
- 1990 MN/DNR survey information shows CIM found.
- 2002 Westwood Professional Services, Inc. found a CIM per Lunser's certificate. County Coordinates Obtained by GPS to CIM:  
NAD 83 (1996 Adjustment)  
N-164262.108  
E-457448.985
- 2004 MN/DOT  
County Coordinates obtained by GPS  
NAD 83 (1996 Adjustment)  
N-164262.159  
E-457448.966
- 2008 Westwood Professional Services, Inc. found a CIM at the corner location. CIM is accepted as marking the obliterated corner position. County Coordinates Obtained by GPS coincide with 2004 MN/DOT position.


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 5, Township 37, Range 31, 4<sup>th</sup> P.M.  
STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 10-4-85 found a railroad spike  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 10-4-85 placed a Benton County C.I.M.  
DATE

## SKETCH OF REFERENCE TIES

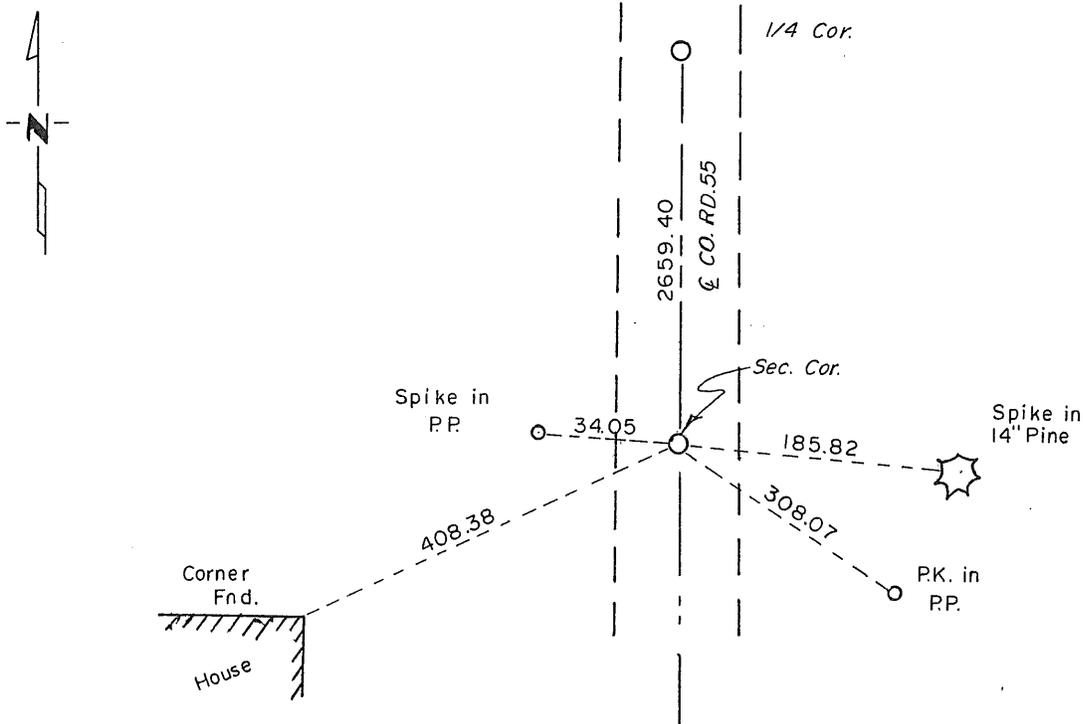

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Lauer 12/15/88  
SIGNATURE DATE

Registration No. 9394

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy


DOCUMENT NO. \_\_\_\_\_

Watab

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 25 day of August, 1972  
I did restore the northeast corner of Section 5,  
Twp. 37, Rg. 31, Benton County, Minnesota, which  
was evidenced by centerline of Co. Rd. No. 55 and testimony  
of Mr. Graves; land owner to the south

I further certify that in order to perpetuate said corner I did  
at the exact location thereof place a permanent marker consisting  
of a railroad spike and that  
I did establish witness or reference monuments as shown below:

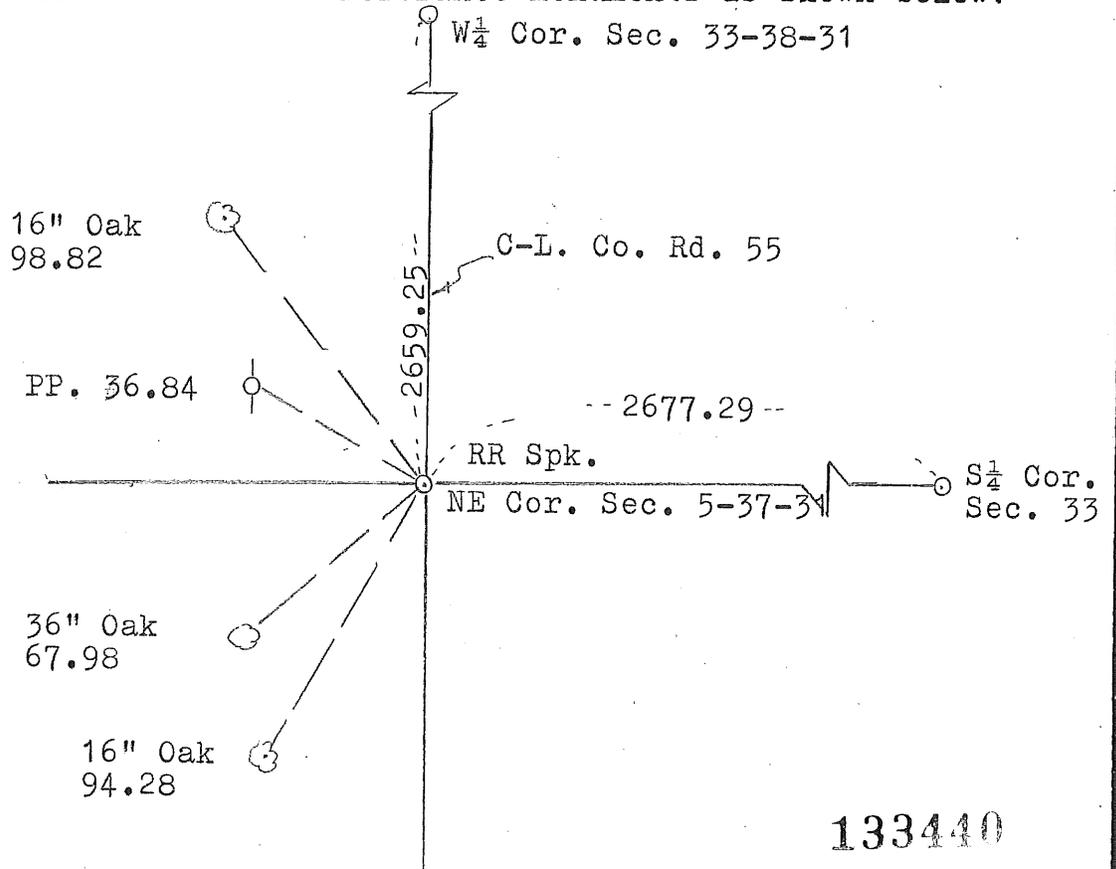

133440

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

William F. Jensen

Minn. Registration No. 9394

Office of the Register of Deeds,  
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 9th day of February, 1973.

J. O. Johnson  
Register of Deeds

By Marilyn Nowak Deputy.