

Certified, Filed and or Recorded on
Nov. 05, 2008 AT 08:29AM

Signed: M
MARILYN V NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY REGISTER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER



NORTHEAST Corner of Section 6, Township 37, Range 31
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 8-28-08 found a CAST IRON MON

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

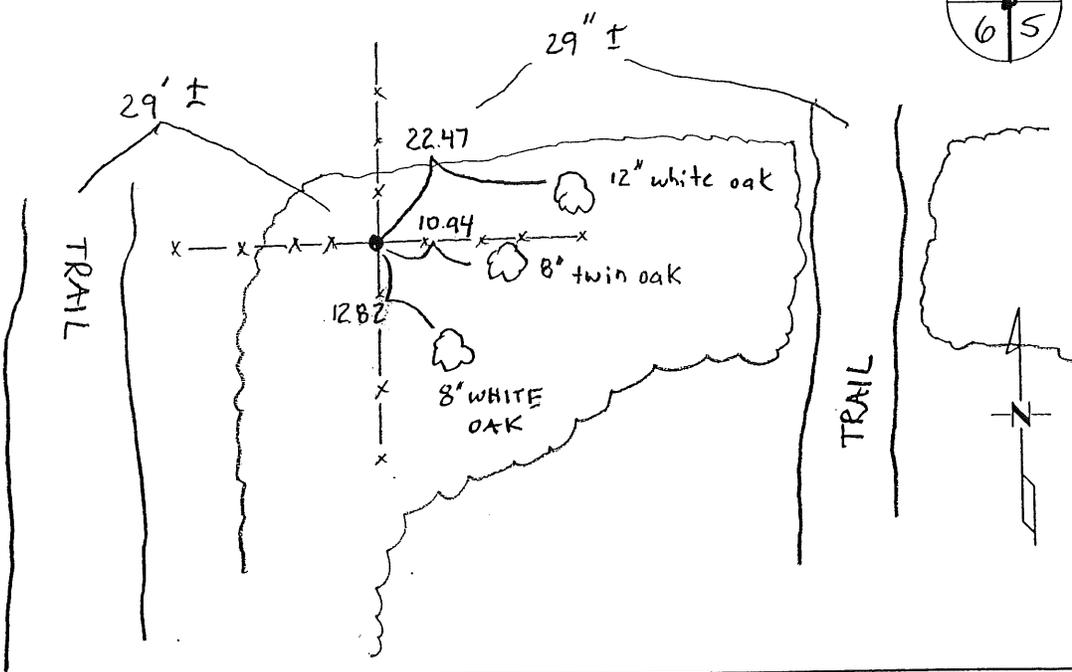

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]
Deputy County Surveyor
License No. 43932

Date: 11/3/08

Statement of Evidence:

F062

Northeast Corner of Section 6, Township 37 North, Range 31 West, Watab Township, 4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|-------------|--------|-----------|
| 4" Bur Oak | N 79 E | 50 links |
| 8" Bur Oak | N 26 W | 29 links |
| 10" Bur Oak | S 57 W | 218 links |
| 14" Bur Oak | S 38 E | 220 links |
- 1986 Paul Wellen, LS 10461, set a cast iron monument Northwest of a tree line intersection. He filed a Certificate of Location (#182958).
- 2001 Westwood Professional Services, Inc. found a cast iron monument on the centerline of a north/south road and a fence line west and an occupation line to the east.
- 2002 No resurvey information was found on this corner in the Benton County records.
- 2003 Survey & Engineering Professionals, Inc. obtained coordinates by conventional traverse. County Coordinates:
NAD 83 (1996 Adjustment)
N- 164239.403
E- 452060.505
- 2004 MN/DOT
County Coordinates obtained by GPS
NAD 83 (1996 Adjustment)
N-164239.434
E-452060.050
- 2008 Westwood Professional Services, Inc. found a CIM at the intersections of fence lines north/south/east/west and all ties from Certificate of Location #182958. CIM is accepted as marking the obliterated position for this corner. Coordinates obtained by GPS coincide with 2004 MN/DOT position.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 6, Township 37, Range 31, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9-29-86 placed a Cast Iron Monument
DATE

SKETCH OF REFERENCE TIES

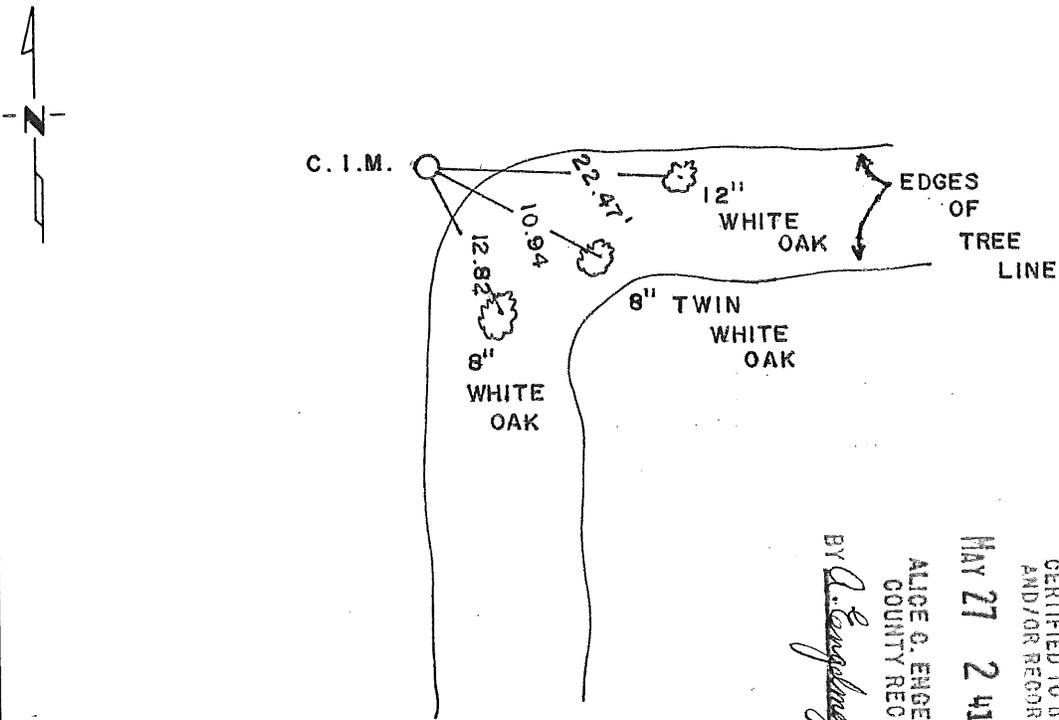

BY *Alice O. Engelmeyer* DEPUTY
 ALICE O. ENGELMEYER
 COUNTY RECORDER
 MAY 27 2 41 PM '87
 OFFICE OF
 BENTON COUNTY RECORDER
 BENTON COUNTY, MN
 CERTIFIED TO BE FILED
 AND/OR RECORDED ON
 182958

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Dennis J. Miller 5/5/87
 SIGNATURE DATE

Registration No. 10461

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____