

Certified, Filed and or Recorded on
Nov. 05, 2008 AT 08:30AM



Signed: [Signature]
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 9, Township 37, Range 31
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 9-24-08 found a CAST IRON MON
- left monument as found lowered monument removed monument (explain)
- On _____ placed on _____

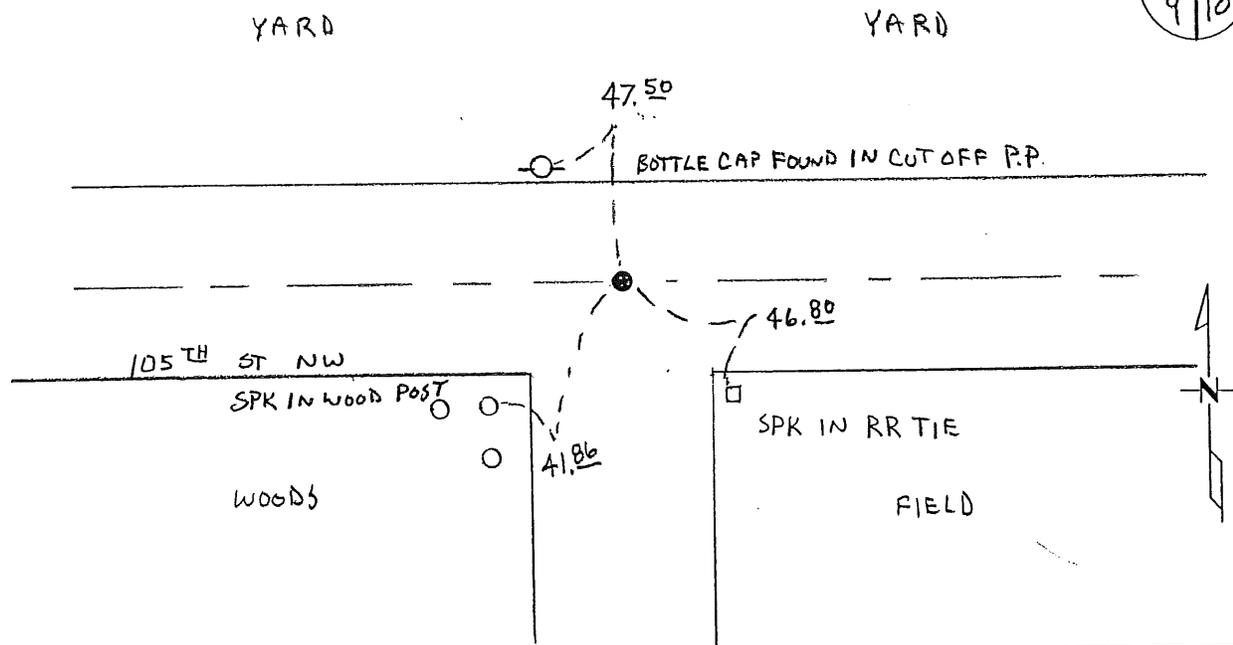

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]
Deputy County Surveyor
License No. 43932

Date: 11/3/08

Benton County Surveyor's Office
 Chris Hoglund, Deputy County Surveyor
 Minnesota License No. 43932

Statement of Evidence:**F092**

Northeast Corner of Section 9, Township 37 North, Range 31 West, Watab Township, 4th Principal Meridian, Benton County, Minnesota.

- 1850 Original US General Land Office survey set a wood post in a mound with a pit for the corner location.
- 1945 MN/DOT alignment plans for US 10 show corner assumed at intersection of road north-south and fence line east being 1528.4 feet west of centerline.
- 1969 This corner is noted on the following recorded plats:
ROSE ANNA BEACH FIRST ADDITION 6/25/1969 James E. Borehave
- 1972 Survey by E.G. Elletson, LS 728, shows iron pipe at the corner.
- 1972 County Highway reference ties:
- | | | |
|------------|-----|--------|
| PP | WNW | 47.44 |
| NW Cor Hse | NE | 165.74 |
| SW Cor Hse | NE | 141.57 |
| SE Cor Hse | NE | 187.45 |
| 3" Pine | NW | 119.81 |
- 1982 David Regan, LS 12236, found a 1" pipe in the centerline of roads east/west/south. He set a cast iron monument over the 1" pipe and filed a Certificate of Location (#163360). (Same ties as 1972)
- 2002 Westwood Professional Services, Inc. found a cast iron monument at the intersection of the centerlines of 105th Street NW (running east and west) and 15th Avenue NW (from the south).
 County Coordinates Obtained by GPS to CIM
 NAD 83 (1996 Adjustment)
 N-158758.463
 E-462853.128
- 2004 MN/DOT
 County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-158758.524
 E-462853.055
- 2008 Westwood Professional Services, Inc. found a cast iron monument at the intersection of the centerlines of 105th Street NW (running east and west) and 15th Avenue NW (from the south) and one remaining tie from Certificate #163360. CIM is accepted as marking the obliterated position for this corner location. Coordinates obtained by GPS coincide with 2004 MN/DOT position.


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 9, Township 37, Range 31, 4th P.M.
STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 8/11/82 found a 1 inch iron pipe in center line of Twp. Rds.
east-west and south
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 8/11/82 placed a Benton County cast iron monument over 1 1/2
DATE
inch iron pipe in center of road

SKETCH OF REFERENCE TIES

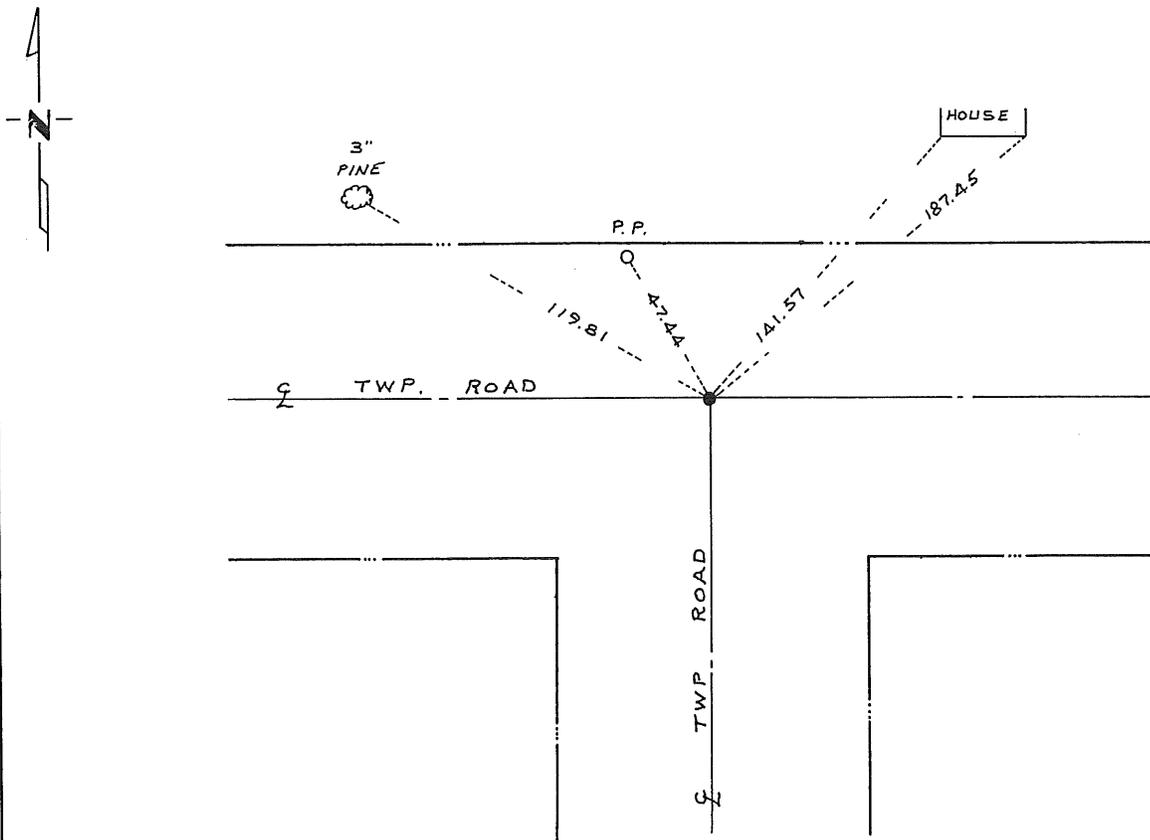

Statement of evidence relative to this corner location is on back of page. **163360**

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David P. Regan 9/1/82
SIGNATURE DATE

Registration No. 12236

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

County Recorder
OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 11 A.M. on the 18th day of October A.D., 1982

County Recorder
Register of Deeds F.A. Johnson

By _____, Deputy

DOCUMENT NO. _____