

Certified, Filed and or Recorded on  
Dec. 24, 2008 AT 08:51AM


Signed: BW  
MARILYN J NOVAK B V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 16, Township 37, Range 31  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 9-24-08 found a CAST IRON MON
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

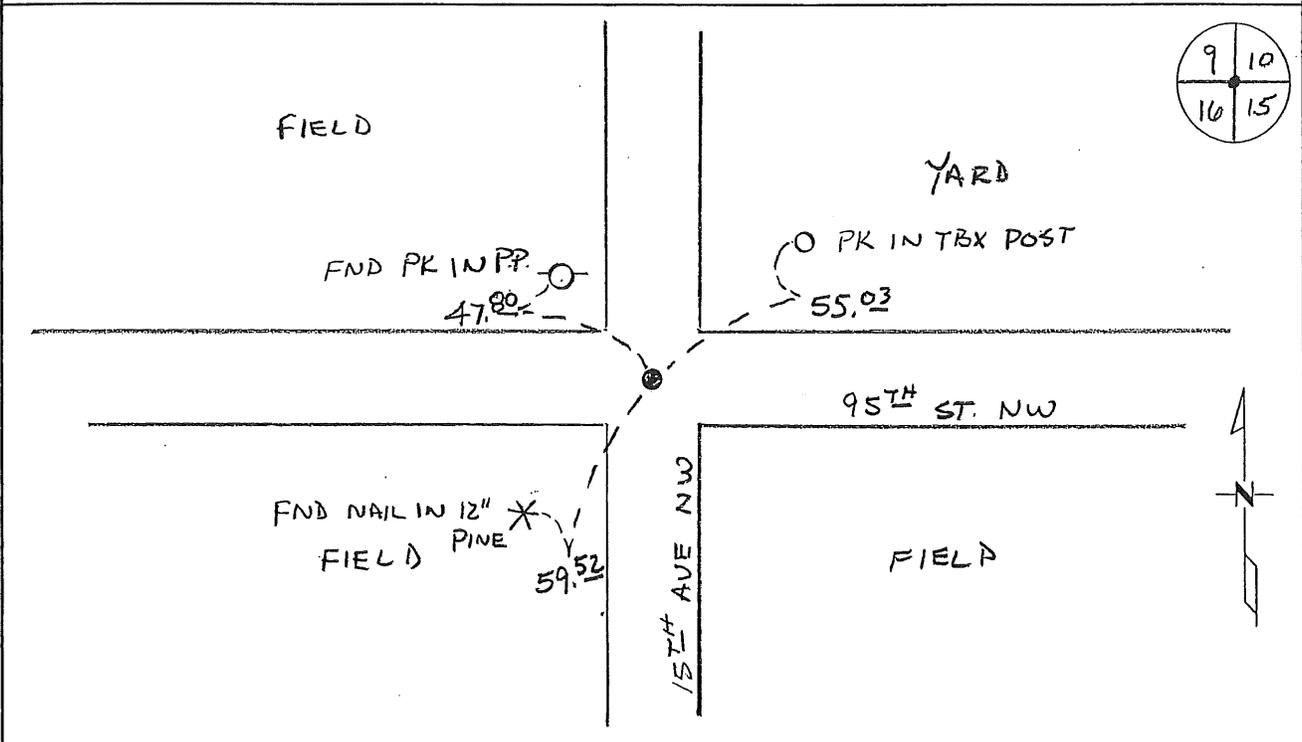

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy County Surveyor  
License No. 43932

Date: 12/17/08

PAGE 1 OF 2

**Statement of Evidence:**

**F162**

Northeast Corner of Section 16, Township 37 North, Range 31 West, Watab Township,  
4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1850 Original US General Land Office survey set a wood post in a mound for the corner location.
- 1916 County Surveyor's Record Book 1, page 313, and Record Book A, Map No. 20), shows a survey by J.P. Soderstrum, which notes an old oak post at the corner location in the intersection of the centerline of roads. He set 2 large rocks on top of each other and notes a distance of 40.71 chains (2686.86 feet) to the North ¼ corner of Sec 15. Tie:  
SW Cor School Hse NE 249 links (164.34 feet)
- No Date County Surveyor's Record Book 1, page 343, notes a stone at the corner with same tie.
- 1982 David Regan, LS 12236, found a 1" pipe over a stone in the centerline of roads east/west and north/south. He set a cast iron monument over the stone and removed the 1" pipe and filed a Certificate of Location (#162600). Lists tie of 142.10 feet NE to SW corner of garage.
- 2003 Surveying & Engineering Professionals, Inc reported finding a CIM.
- 2004 MN/DOT  
County Coordinates obtained by GPS  
NAD 83 (1996 Adjustment)  
N-153437.714  
E-462794.998
- 2008 Westwood Professional Services, Inc. found a CIM at the corner location fitting two of Regan's 1982 ties and coordinates obtained by GPS coincide with 2004 MN/DOT position. CIM is accepted as marking the obliterated position for this corner.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 16, Township 37, Range 31, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 6/17/82 found a 1 inch iron pipe over a stone monument in center line of east-west and north-south township roads
  - left monument as found,  lowered monument,  removed monument (explain)
- On 6/17/82 placed a Benton County cast iron monument over stone monument- iron pipe was removed

### SKETCH OF REFERENCE TIES

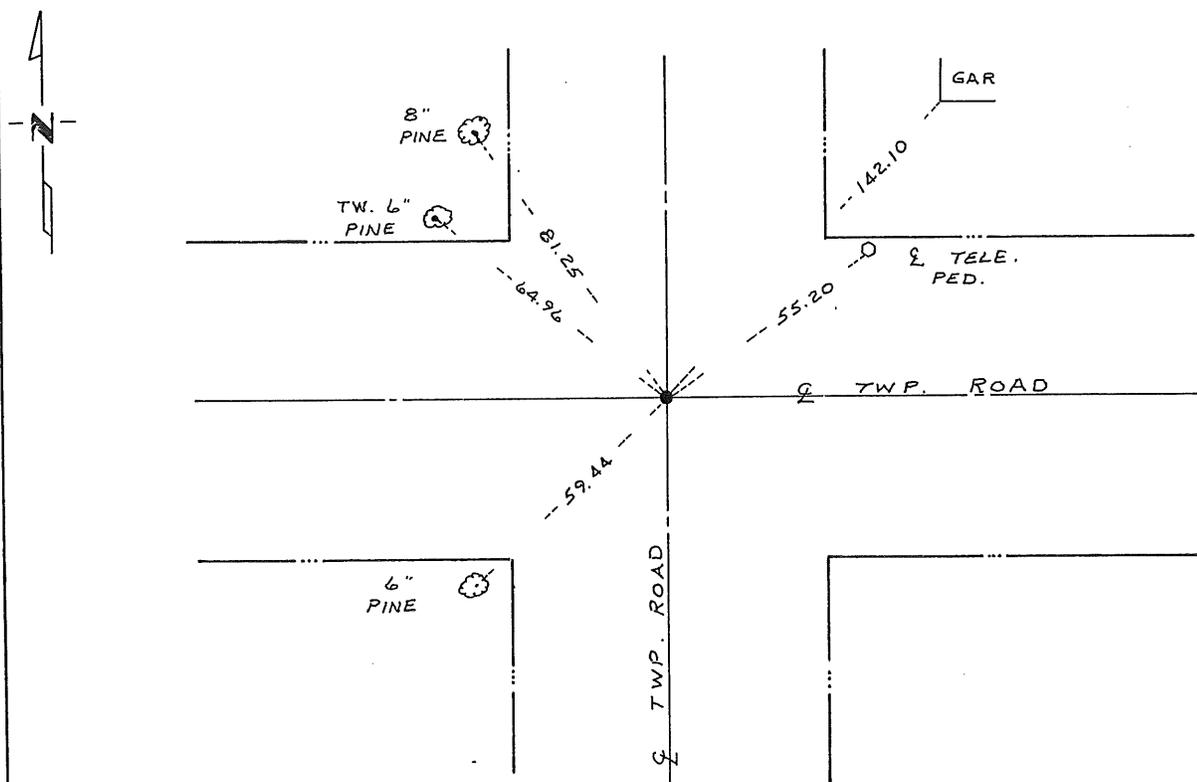

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David O. Regan 7/13/82  
SIGNATURE DATE

Registration No. 12256

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS County Recorder  
 County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 10 P.M. on the 27 day of July A.D., 1982

Register of Deeds F.R. Johnson

By \_\_\_\_\_, Deputy

DOCUMENT NO. 162600