

Certified, Filed and or Recorded on
Nov. 05, 2008 AT 08:19AM

Signed: [Signature]
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 27, Township 37, Range 31
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10-8-08 found a CAST IRON MON

left monument as found lowered monument removed monument (explain)
 On _____ placed an _____

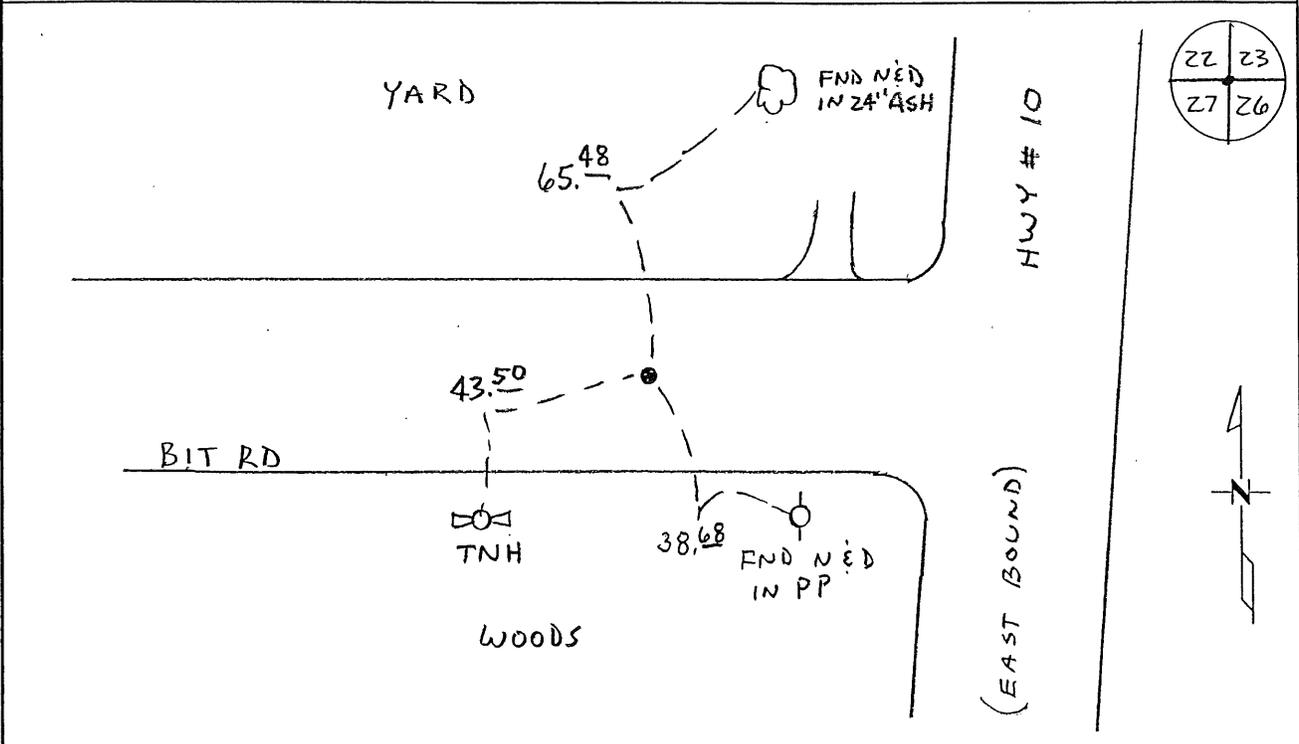

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]
Deputy County Surveyor
License No. 43932

Date: 11/3/08
PAGE 1 OF 2

Benton County Surveyor's Office
Chris Hoglund, Deputy County Surveyor
Minnesota License No. 43932

Statement of Evidence:

F272

Northeast Corner of Section 27, Township 37 North, Range 31 West, Watab Township,
4th Principal Meridian, Benton County, Minnesota.

1850 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

12" Blk Oak	S 87 1/2 E	210 links
10" Bur Oak	N 79 1/2 E	179 links

This corner is noted on the following recorded plats:

<i>CAMBELL OAKWOOD KNOLL</i>	7/11/1956	Royal T. Dossett
<i>FIRST ADDITION TO CAMBELL OAKWOOD</i>	10/15/1958	Royal T. Dossett
<i>OLTZ ESTATES</i>	8/17/1983	Paul E. Wellen

- 1939 County Engineer's notebook No. 112 contains a road survey by H. G. Elletson for SAR No. 4. Road survey starts in center of TH 10 being 207.2 feet east of the NE corner of Section 27.
- 1946 MN/DOT alignment map for TH 10 shows corner 201.2 feet west of the center line and shows distance of 2645.2 feet to the North ¼ corner of Section 26.
- 1978 On October 2, 1978 Paul Wellen, LS 10461, found an iron monument at the centerline of County Road 4 (running east and west). He filed as Certificate of Location (#151864). 1981 notes give a distance of 2645.18 feet to the North ¼ corner of Section 26 and a distance of 1696.37 feet west to a WC on the bank of the Mississippi River.
- 1979 On October 2, 1979 Ronald Engelmeyer, LS 13334, found a 1/2" iron pipe at the corner location. He filed a Certificate of Location (#151563). Certificate shows a distance of 1696.38 feet west to MC, 2659.87 feet to the East ¼ corner of Section 22, and 201.4 feet to the centerline of the eastbound lane of TH 10.
- 2003 Westwood Professional Services, Inc. found a cast iron monument.
County Coordinates obtained by GPS
NAD 83 (1996 Adjustment)
N-142793.290
E-468043.056
- 2004 MN/DOT
County Coordinates obtained by GPS
NAD 83 (1996 Adjustment)
N-142793.336
E-468042.994
- 2008 Westwood Professional Services, Inc. found a CIM fitting ties from both Certificate of Location #151864 and #151563. CIM also fits 1946 MN/DOT ties to the N1/4 of Section 26 (2645.12 meas.). CIM is accepted as marking the obliterated position for this corner. Coordinates obtained by GPS coincide with 2004 MN/DOT position.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N. E. _____ Corner of Section 27, Township 37, Range 31, _____ P.M.
 STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES



Filed under S.W. Corner Section 22, T37 R31
 Certificate #151864

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE DATE

Registration No. _____

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
 County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northwest Corner of Section 27, Township 37, Range 31, ~~32~~ P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On 12-16-1978 found a 1/2" iron pipe
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES


Refer to next page

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald Engelmeier _____
SIGNATURE DATE

Registration No. 13334

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

County Recorder
OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at 9 A .M. on the 22nd day of February A.D., 1979

Register of Deeds F.A. Johnson


County Recorder, Deputy

DOCUMENT NO. 151563

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 16 day of December, 1978
I did FIND the NORTHEAST corner of Section 27,
Twp. 37, Rg. 31, BENTON County, Minnesota, which
was evidenced by 1/2" IRON PIPE

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of LEFT AS IT WAS. and that
I did establish witness or reference monuments as shown below:

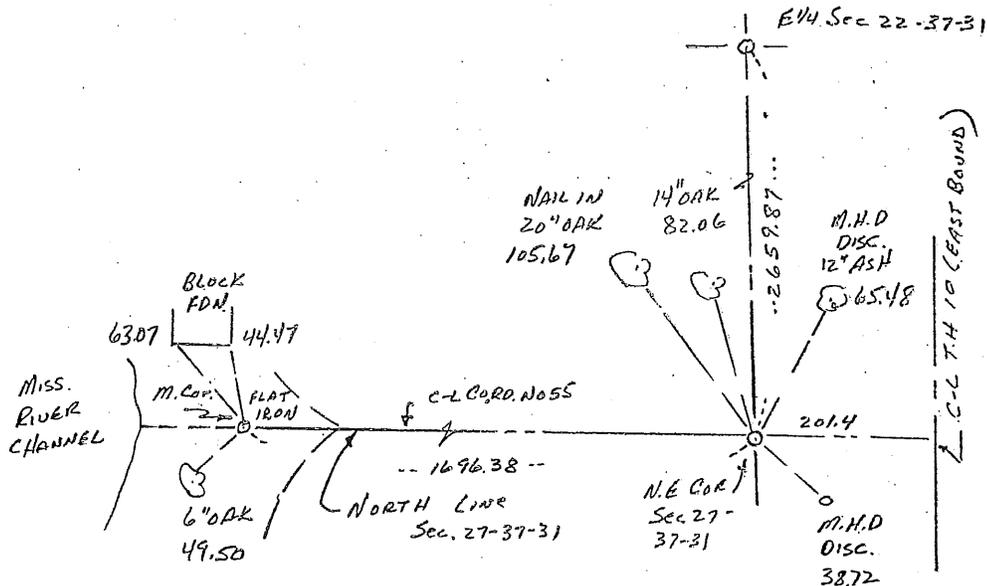

151563

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

Ronald Engelman

Minn. Registration No. 13334

Office of the ^{County Recorder} ~~Register of Deeds~~,
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 21st day of February, 1979. 9 A.M.

F.A. Johnson
Register of ~~Deeds~~ ^{County Recorder}
By _____ Deputy.