

Certified, Filed and or Recorded on
Sep. 23, 2008 AT 01:34PM

Signed: BW
MARILYN J NOVAK G V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 1, Township 38, Range 32
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 8-12-08 found a CAST IRON MON.
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

106

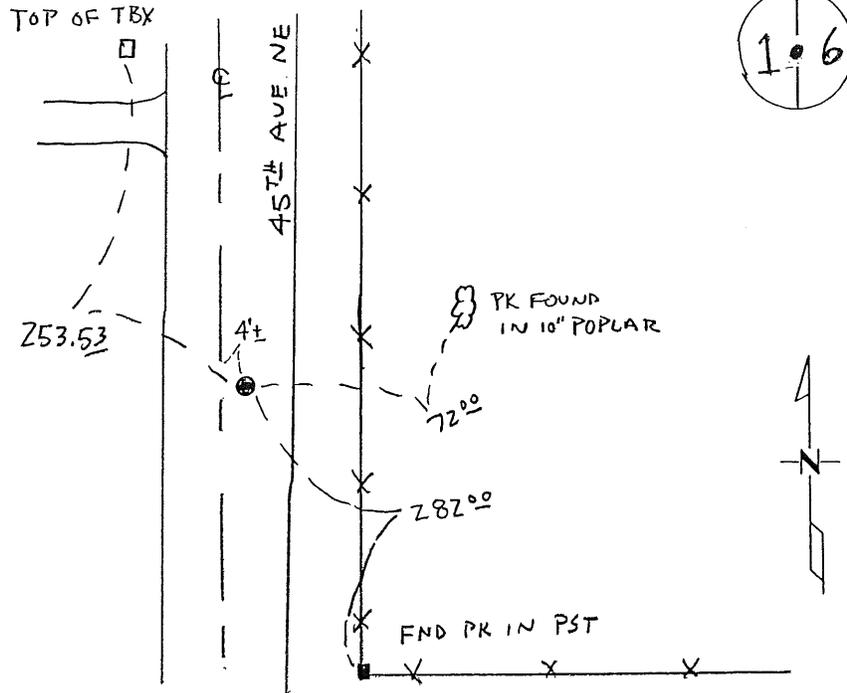

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 8/29/08

Benton County Surveyor's Office
 Chris Hoglund, Deputy County Surveyor
 Minnesota License No. 43932

Statement of Evidence:

E013

The East Quarter Corner of Section 1, Township 38 North, Range 32 West, West Langola Township, 4th Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office surveyor, Theodore Conkey, set a wood post at this location and bearing trees were recorded.

6" Blk Oak	2 1/2 W	240 links
6" Blk Oak	S 43 E	286 links

A line tree is noted as a 6" Blk Oak, North, 18.31 chains.

1982 Paul Wellen's, LS 10461, survey notes show corner 6 feet west of centerline of north-south road with ties:

R.H. in 10" Poplar	NE	28.73
N&D in 3" Oak	E	16.06
R.H. in 6" Poplar	SE	22.21

He measured 2687.36 feet to the SE corner of Section 1.

1988 Bruce Skipton, LS 17768, found a 3/4" iron pipe at the corner location. No resurvey information was found in the Benton County records. On October 17, 1988 he set a cast iron monument over the iron pipe and filed a Certificate of Location (#191235).

2002 On January 24, 2002 Westwood Professional Services, Inc. found a cast iron monument down 1 foot.

County Coordinates obtained by GPS to CIM:

NAD 83 (1996 Adjustment)

N- 193580.775

E- 446097.112

2008 Westwood Professional Services, Inc. found a cast iron monument 4' east of the north/south centerline. Coordinates obtained by RTK GPS coincide with 2002 position.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST $\frac{1}{4}$ Corner of Section 1, Township 38N, Range 32W, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 7-14-88 found a 3/4" IRON PIPE
DATE

left monument as found, lowered monument, removed monument (explain)

On 10-17-18 placed a CAST IRON MONUMENT OVER IRON PIPE
DATE

SKETCH OF REFERENCE TIES

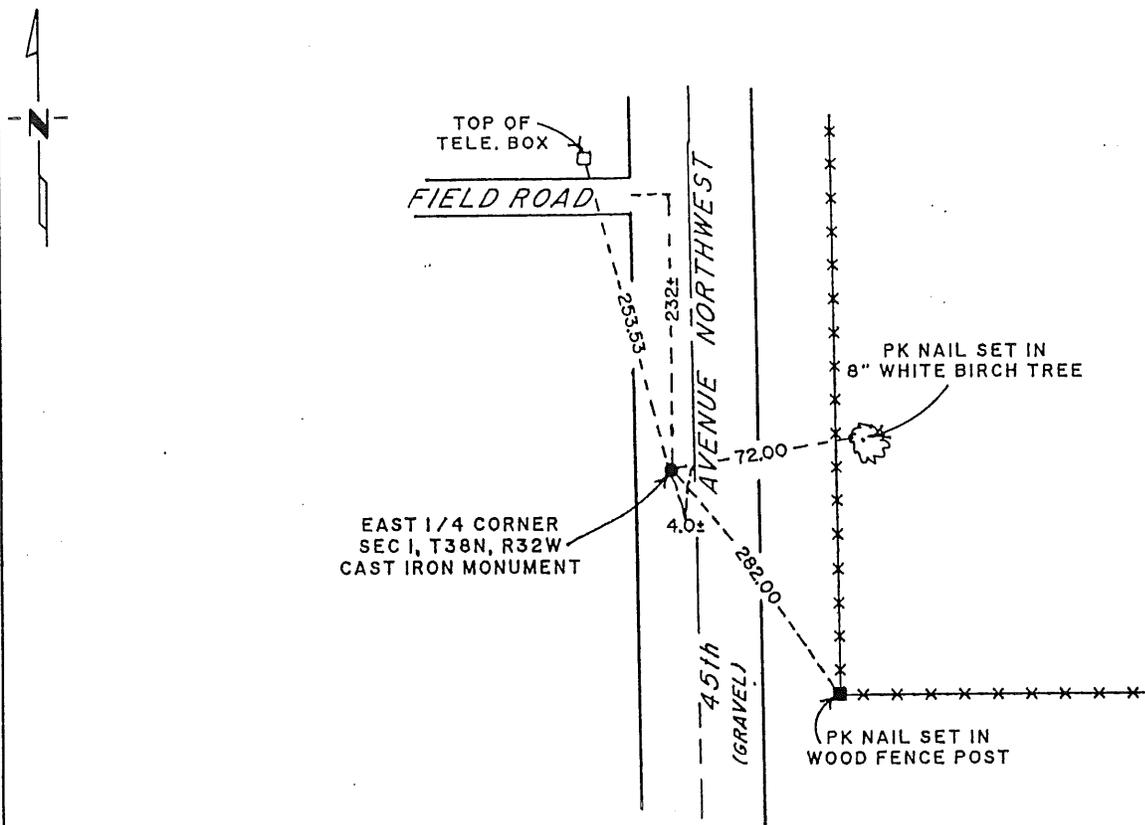

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Shuster 12-14-88
SIGNATURE DATE

Registration No. 17768

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

EAST QUARTER CORNER, SECTION 1, T38N, R32W, 4TH P.M.

1. The original survey was accomplished in August 1849, by Theodore Conkey, a U.S. Deputy Surveyor.
2. The old County Surveyor's books, in Benton County, provide no information for relocation of said corner.
3. On July 14, 1988, Paul E. Wellen & Associates, found a 3/4" iron pipe for marking the position of said corner. Set cast iron monument over the iron pipe.

191235

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, ILL
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 12 11 52 AM '89

ALICE D. BERTHELETT
COUNTY RECORDER

BY *Jew* DEPUTY