

A 361515

Certified, Filed and or Recorded on  
Nov. 05, 2008 AT 08:34AM



Signed:   
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 3, Township 38, Range 32  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 8-14-08 found a CAST IRON MON
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

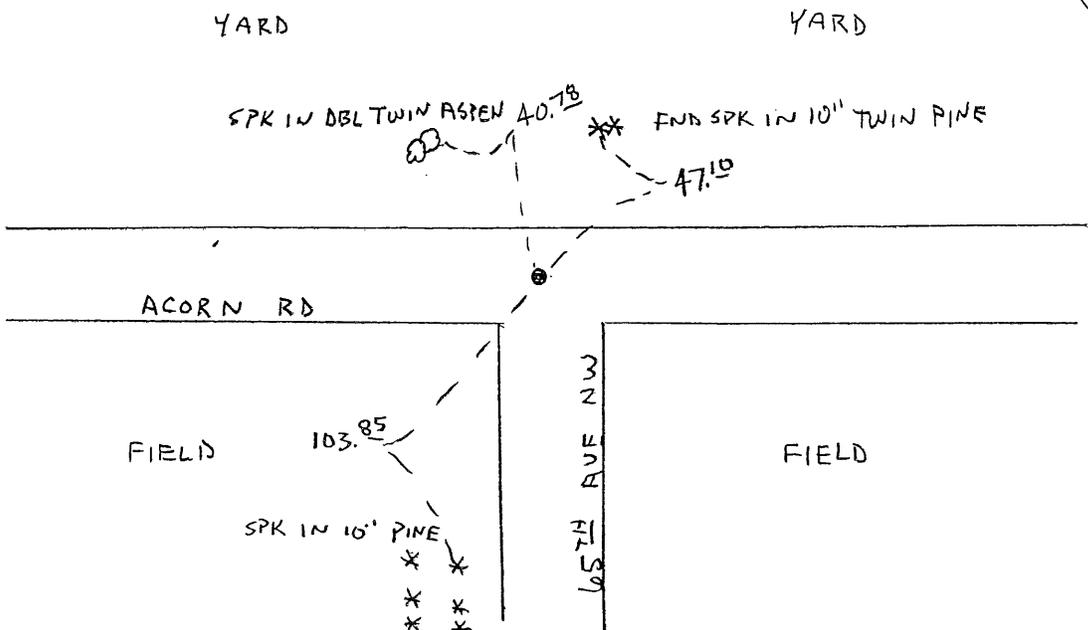

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature   
Deputy County Surveyor  
License No. 43932

Date: 11/3/08

**Statement of Evidence:**

**E033**

The East Quarter Corner of Section 3, Township 38 North, Range 32 West, West Langola Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office surveyor, Edwin James, Jr., set a wood post in a mound with pit 8 links east for the corner location.
- 1977 On June 23, 1977, William Lunser, LS 9394, set a 1" iron pipe at the centerline of a north/south/west road and filed a Certificate of Location (#147080). The Certificate shows the corner is 2739.72' north of the SE corner of Section 3.
- 1989 On November 20, 1989 William Lunser set a cast iron monument at the location of the 1" iron pipe and filed a Certificate of Location (#195968).
- 2002 On June 6, 2002 Westwood Professional Services, Inc. found a cast iron monument and 2 previous ties at the east/west centerline and 5' west of the north/south centerline.  
 County Coordinates obtained by GPS (Cast Iron Monument)  
 NAD 83 (1996 Adjustment)  
 N-193574.171  
 E-435318.289
- 2008 Westwood Professional Services, Inc. found a cast iron monument at the east/west centerline and 5' west of the north/south centerline. The township roads are longstanding evidence for the section line location. Position fits occupation for the center of Sections 2 and 3. CIM is accepted as marking the obliterated corner location. Coordinates obtained by RTK GPS coincide with 2002 position.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 3, Township 38, Range 32, 4<sup>th</sup> P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 11-20-89 placed a Benton County Cast Iron Mon.  
DATE

### SKETCH OF REFERENCE TIES

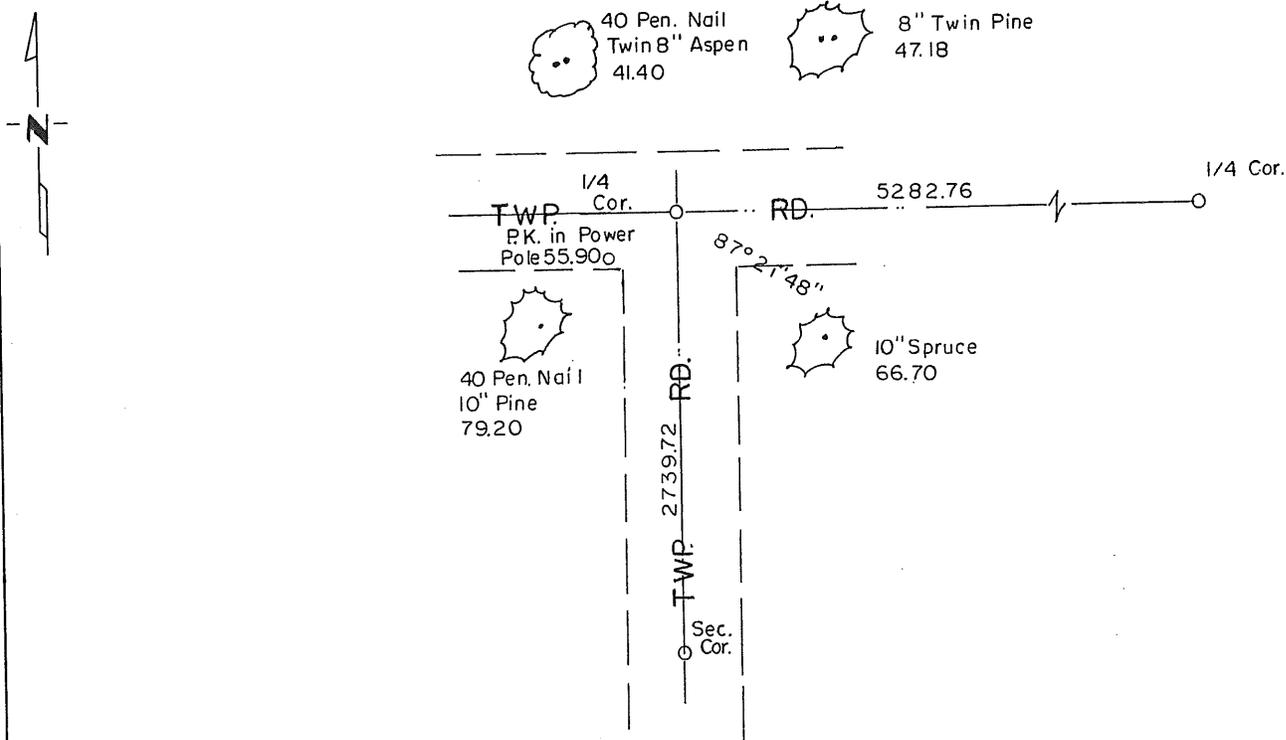

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Luman (1/5/90)  
SIGNATURE DATE

Registration No. 9394

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

6-23-77

Lunser Surveying Co. placed a 1" iron pipe at the centerline of two roads East-West and North-South and filed a certificate of location with the county recorder.

11-20-89

Found the same 1" iron as stated above, verified it's location with existing ties and placed a cast iron mon.

1 9 5 9 6 8

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MO  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JAN 11 8 37 AM '90

ALICE C. ENGELMEYER  
COUNTY RECORDER

BY *Jan* DEPUTY

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

8 1/4 Corner of Section 3, Township 38, Range 32, \_\_\_\_\_ P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 6-23-1927 found a evidenced by centerline of the road to the east  
south and west DATE.

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a 1" iron pipe  
DATE

## SKETCH OF REFERENCE TIES

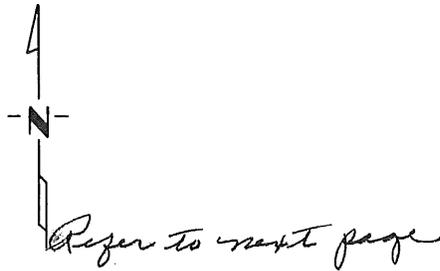

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William T. Lusser 6-23-1927  
SIGNATURE DATE

Registration No. 9394

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS <sup>County Recorder</sup>  
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ 9 .M. on the 20th day of December A.D., 1927


Register of Deeds T. G. Johnson  
By County Recorder, Deputy

DOCUMENT NO. 14708d

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 23 day of June, 1977  
 I did restore the E 1/4 corner of Section 3,  
 Twp. 38, Rg. 32, Benton County, Minnesota, which  
 was evidenced by centerline of the road to the east, south &  
west.

I further certify that in order to perpetuate said corner I did  
 at the exact location thereof place a permanent marker consisting  
 of 1" iron pipe and that  
 I did establish witness or reference monuments as shown below:

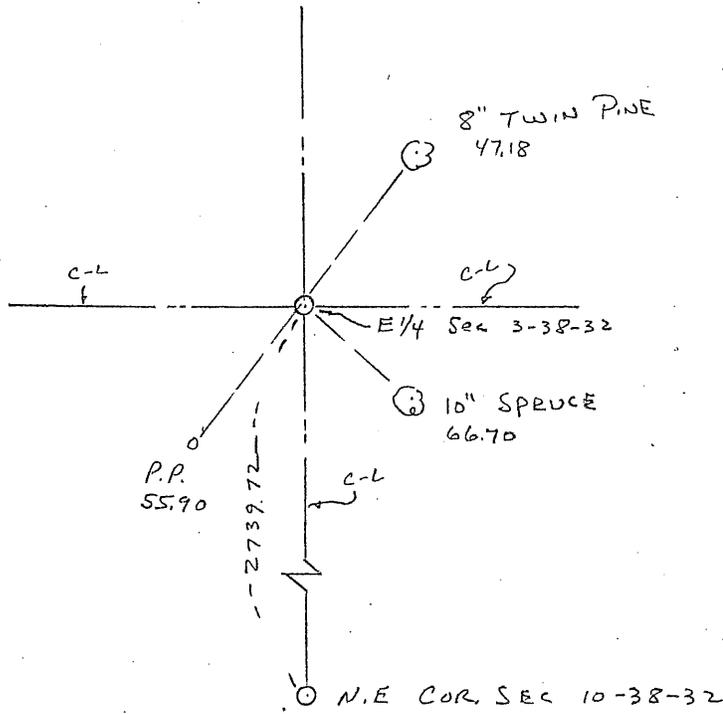

147680

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

William J. Lerner

Minn. Registration No. 9394

County Recorder  
 Office of the Register of Deeds,  
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 20 day of December, 1977 at 9 A.M.

F. A. Johnson  
 Register of Deeds  
 County Recorder

By \_\_\_\_\_ Deputy.