

Certified, Filed and or Recorded on  
Oct. 31, 2008 AT 08:28AM


Signed: JL  
MARILYN J NOVAK G V  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 10, Township 38, Range 32  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 8-18-08 found a CAST IRON MON
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

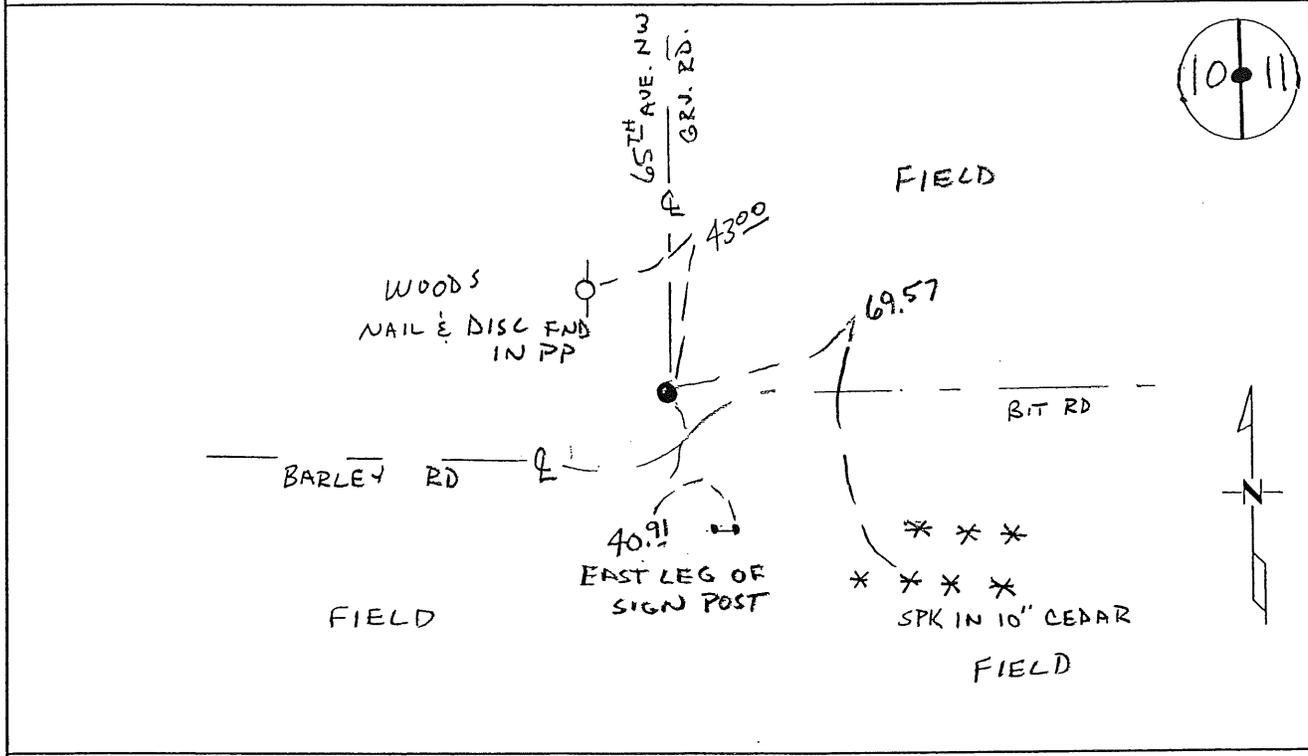

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Ch. [Signature]  
Deputy County Surveyor  
License No. 43932

Date: 10/14/08

**Statement of Evidence:****E103**

The East Quarter Corner of Section 10, Township 38 North, Range 32 West, West Langola Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1852 Original US General Land Office surveyor, Edwin James, Jr., set a wood post in a mound for the corner location with a pit 8 links east,

This corner is noted on the following recorded plat:

*ROLLING OAKS RIVER ESTATES* April 1973 MW Carley

1973 Paul Wellen's, LS 10461, records show the corner was set lost. He notes a distance of 5293.00 feet between the corners.

1978 Paul Wellen notes in Book 10, page 116 gives a distance of 2646.71 feet to the NE corner Sec 10.

1985 David Regan, LS 12236, found a 1/2" iron pipe at the centerline of a north/south road and on the right-of-way line of a road west. He set a cast iron monument at the corner location and filed a Certificate of Location (#176057).

2002 Westwood Professional Services, Inc. found a cast iron monument and 3 previous ties at the intersection of the centerlines of 65<sup>th</sup> Avenue NW (running north and south) and Barley Road (from the east). CIM fits the lost position.  
 County Coordinates (Cast Iron Monument)  
 NAD 83 (1996 Adjustment)  
 N-188190.988  
 E-435507.475

2008 Westwood Professional Services, Inc. found a CIM at this location. Observation by GPS confirms 2002 coordinates.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter \_\_\_\_\_ Corner of Section 10, Township 38, Range 32, 4th P.M.  
STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 8/30/85 found a 1/2 inch iron pipe in centerline Twp road north-south and on north right of way line road west  
 left monument as found,  lowered monument,  removed monument (explain)
- On 8/30/85 placed a Benton County cast iron monument

LENEE  
make  
10  
Advert  
11  
3832

## SKETCH OF REFERENCE TIES

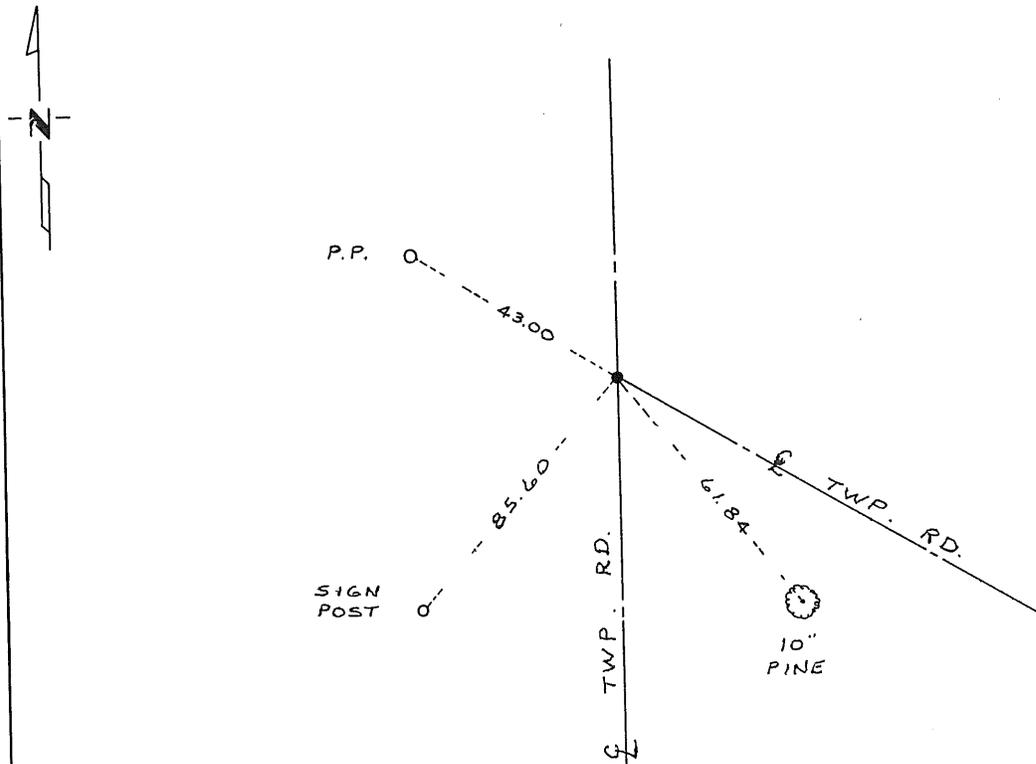

176057

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David P. Regan 12/13/85  
SIGNATURE DATE

Registration No. 12236

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

County Recorder  
OFFICE OF THE REGISTER OF DEEDS  
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 1 P.M. on the 16 day of January A.D., 19 86

County Recorder  
Register of Deeds Alice C. Engelmeier

By NO, Deputy

DOCUMENT NO. \_\_\_\_\_