

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST $\frac{1}{4}$ Corner of Section 12, Township 38N, Range 32W, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 10-16-88 found a 3/4" IRON PIPE
DATE

left monument as found, lowered monument, removed monument (explain)

On 10-17-88 placed a CAST IRON MONUMENT OVER 3/4" IRON PIPE
DATE

SKETCH OF REFERENCE TIES

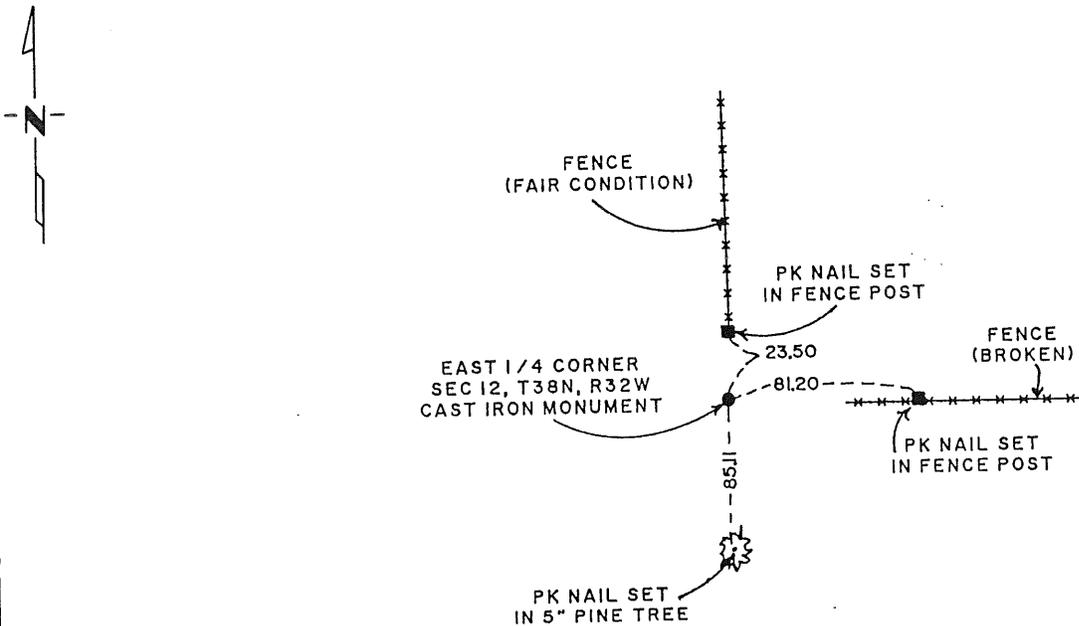

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Johnston 12-14-88
SIGNATURE DATE

Registration No. 17768

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

EAST QUARTER CORNER, SECTION 12, T38N, R32W, 4TH P.M.

1. The original survey was accomplished in August 1849 by Theodore Conkey, a U.S. Deputy Surveyor.
2. The old county surveyor's book, in Benton County, provided no information to relocate said corner.
3. On October 17, 1988, Paul E. Wellen & Associates, found a 3/4" iron pipe at the fence line intersection from the north & east. Set a cast iron monument over the 3/4" iron pipe.

191237

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 12 11 55 AM '89

ALICE C. ENGELMEYER
COUNTY RECORDER

BY Jes DEPUTY

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Q. 1/4 Corner of Section 12, Township 38, Range 32, 4 P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 7-28-78 found a 1/2" iron pipe, on the north fence line, on east fence line, on south field line, and on west field line.
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a 1/2" iron pipe
DATE

SKETCH OF REFERENCE TIES



Refer to next page

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul E. Heelan _____
SIGNATURE DATE

Registration No. 20461

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

County Recorder
OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 10 A .M. on the 26 day of March A.D., 1977


Register of Deeds F.G. Johnson
By _____, Deputy

DOCUMENT NO. 151875

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 28 day of July, 19 78
I did set the East 1/4 corner of Section 12,
Twp. 38, Rg. 32, Benton County, Minnesota, which
was evidenced by a 1/2" iron pipe, on the north fence line, on east fence
line, on south field line, and on west field line.

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of a 1/2" iron pipe and that
I did establish witness or reference monuments as shown below:

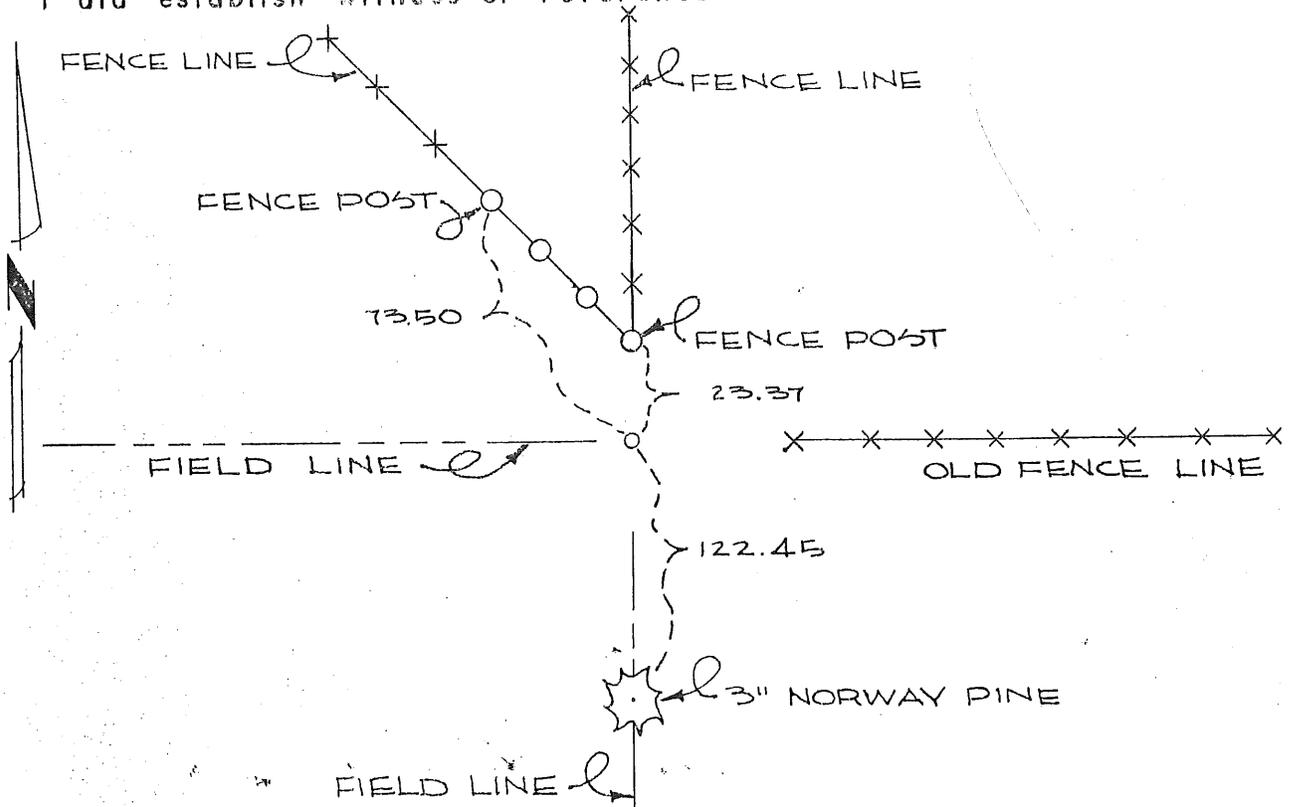

I hereby certify that the above
is true and correct and that I am
a registered Land Surveyor under
the laws of the State of Minnesota.

Sandy Allen
Minn. Registration No. 10461

151875

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument
was filed for record in this office on the
26th day of March, 1979.
109:71

F. J. Johnson
County Recorder

By _____ Deputy.