

A 361331

Certified, Filed and or Recorded on
Oct. 31, 2008 AT 08:18AM


Signed: Ju
MARILYN J NOVAK
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 13, Township 38, Range 32
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 8-21-08 found a 3/4" OPEN I.P.
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

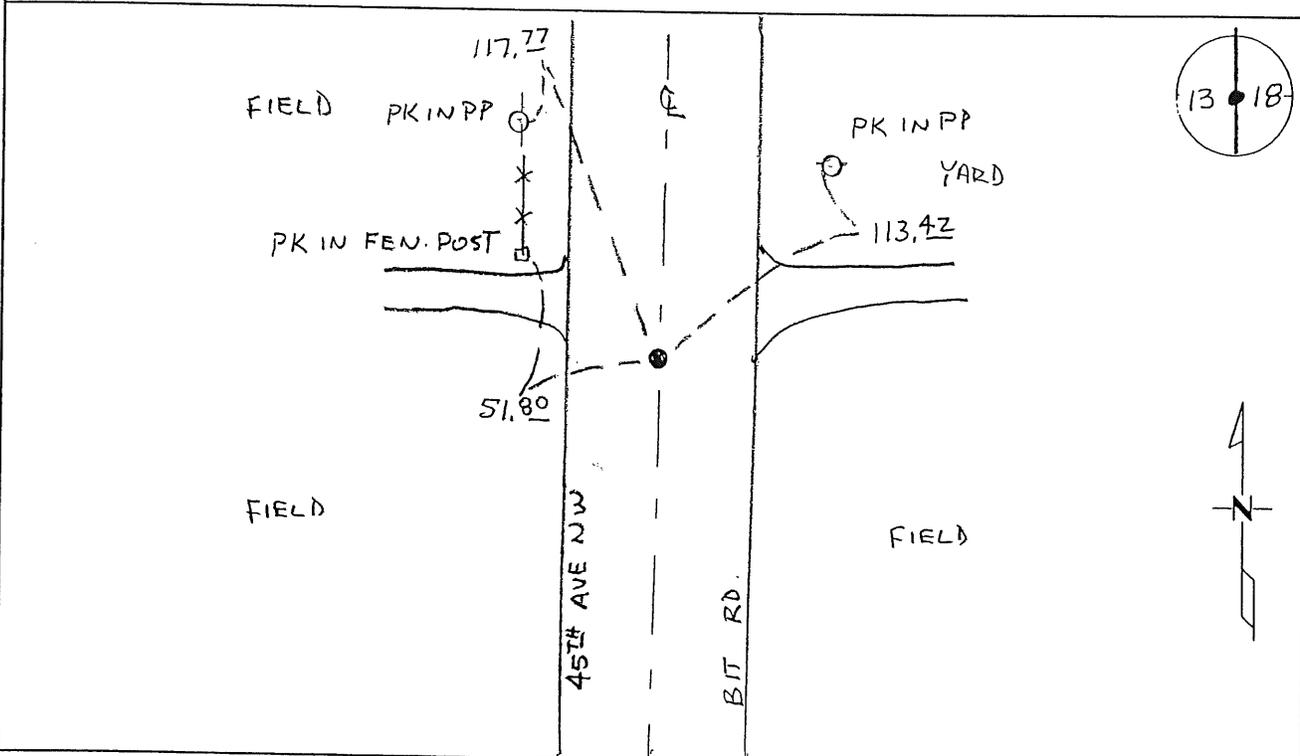

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Ch. Hagedorn
Deputy County Surveyor
License No. 43932

Date: 10/14/08

Statement of Evidence:

E133

East Quarter Corner of Section 13, Township 38 North, Range 32 West, West Langola Township, 4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a wood post in a mound at the corner location with a pit 6 links north.
- 1991 David Regan, LS 12236, set a 3/4" iron monument at the centerline of a County Road north/south and filed a Certificate of Location (#223473).
- 2001 Westwood Professional Services, Inc. found a 3/4" iron pipe flush at the intersection of County Road 73 (running north and south) and occupations lines (from the east and west).
- 2002 No resurvey information was found on this corner in the Benton County records. Westwood Professional Services, Inc. found a 3/4" open.
 County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-182839.062
 E-446421.412
- 2004 MN/DOT
 County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-182839.041
 E-446421.403
- 2008 Westwood Professional Services, Inc. found a 3/4" iron pipe in the centerline of 45th Ave NW 0.26' from lost position. 3/4" iron pipe is accepted as marking the obliterated location for this corner. County Coordinates obtained by GPS coincide with 2004 MN/DOT position.


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 13, Township 38, Range 32, 4th P.M.
STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10-10-91 placed a Iron Monument on center line of county road North-South
DATE

SKETCH OF REFERENCE TIES

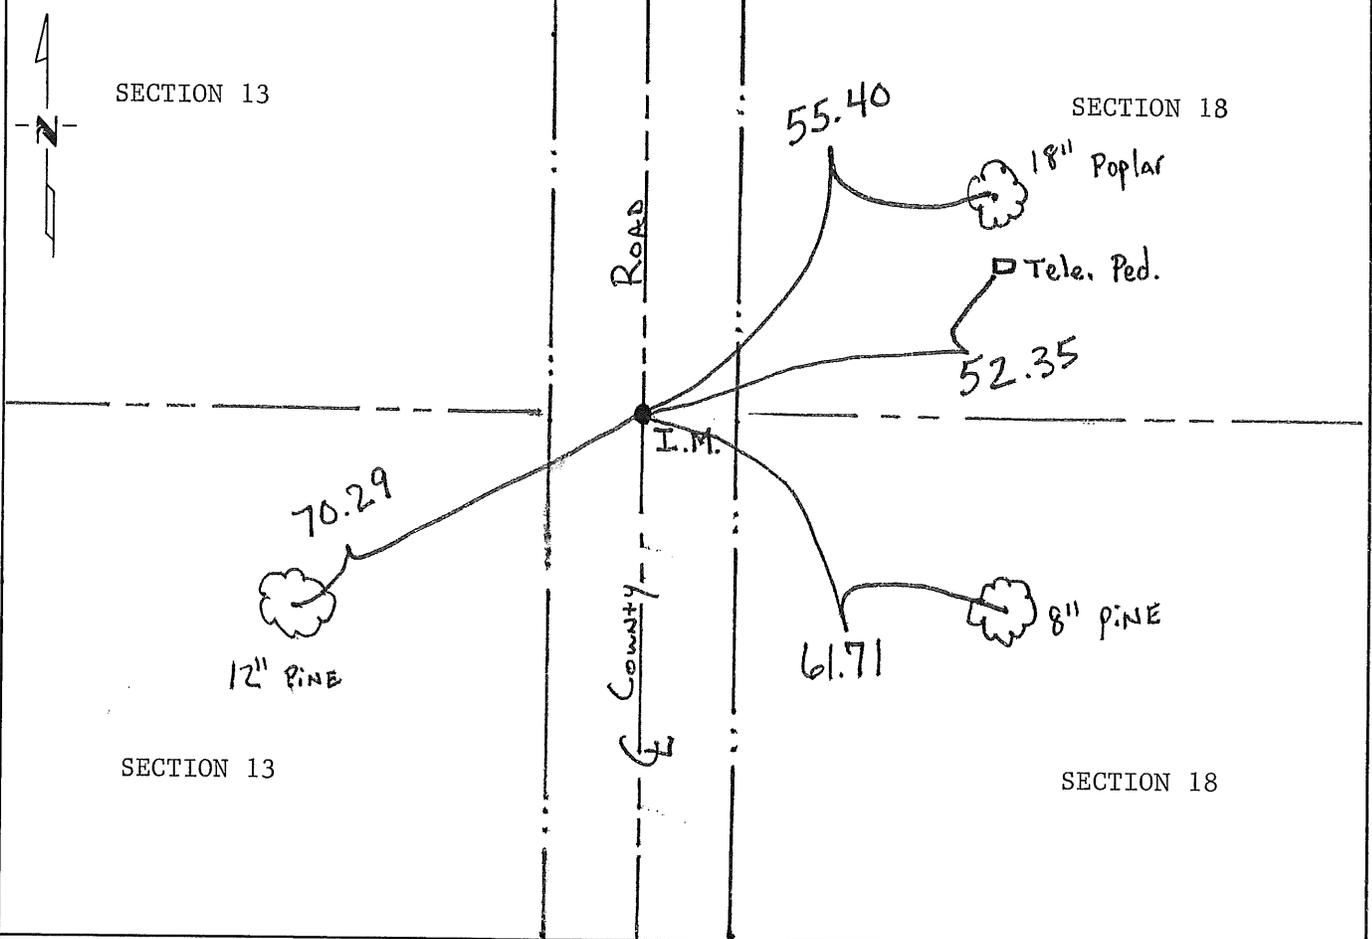

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David P. Ryan 5/12/94
SIGNATURE DATE

Registration No. 12236

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

The G.L.O. survey was done in 1849 by Theodore Conkey.

The County Surveyors records were searched with no reference to this corner.

On 10/91, Regan Land Surveyors, Inc. seached the area, then set a 3/4" iron monument in the centerline of the county road North and South.

2 2 3 4 7 3

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RETURNED ON

JUN 17 1 02 PM '94

ALICE M. BEVER
COUNTY CLERK

BY

Jan
DEPUTY