

Certified, Filed and or Recorded on  
Oct. 31, 2008 AT 08:20AM


Signed: M  
MARILYN J NOVAK G V  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 12, Township 38 N, Range 32 W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 8-20-08 found a CAST IRON MONUMENT
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

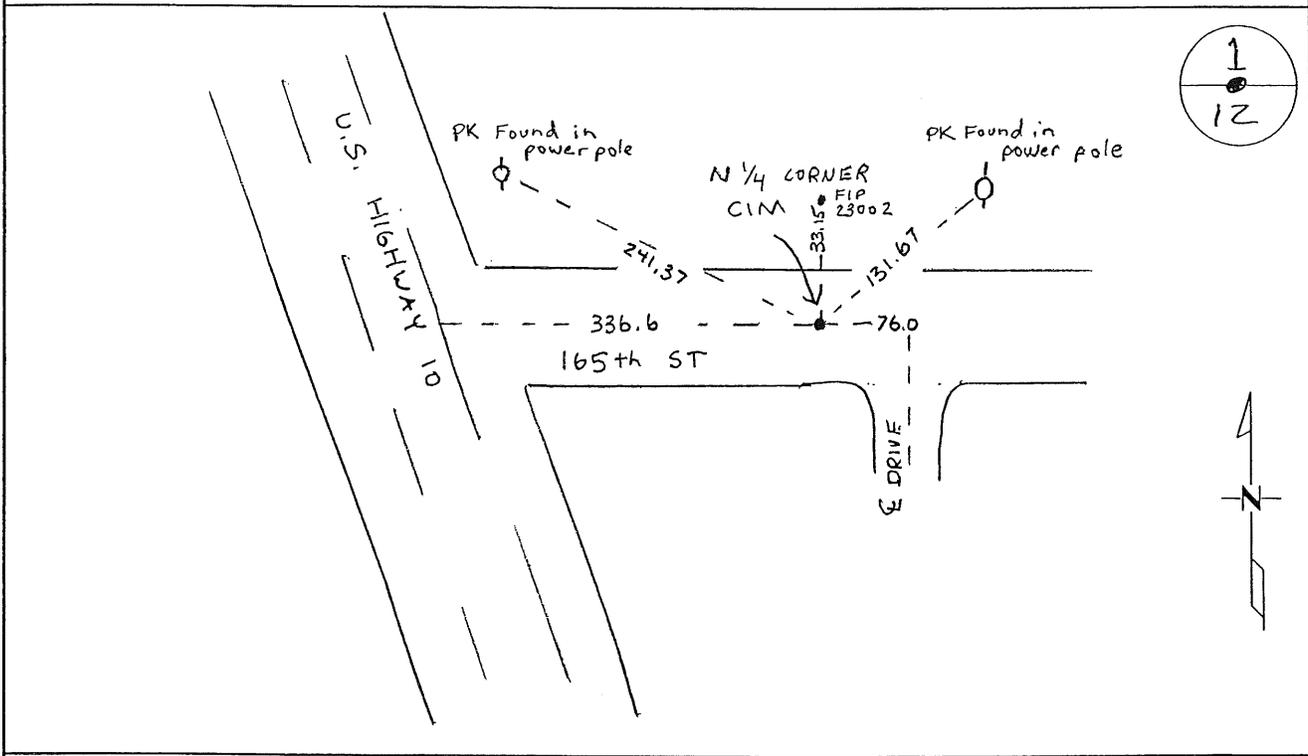

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Ch Hoysrud  
Deputy County Surveyor  
License No. 43932

Date: 10/14/08

Benton County Surveyor's Office  
 Chris Høglund, Deputy County Surveyor  
 Minnesota License No. 43932

**Statement of Evidence:****E121**

The North Quarter Corner of Section 12, Township 38 North, Range 32 West, West Langola Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- |             |            |           |
|-------------|------------|-----------|
| 20" Bur Oak | N 86 1/2 E | 483 links |
| 8" Bur Oak  | N 65 1/2 E | 336 links |
- 1978 Paul Wellen, LS 10461, found a 1/2" iron pipe on the centerline of an east/west road and a tree line to the south. He notes a distance of 2745.64 feet to the NE corner of Section 12.
- 1988 Bruce Skipton, LS 17768, found a 1" iron pipe and set a cast iron monument over it and filed a Certificate of Location (#191343).
- 2001 Westwood Professional Services, Inc. found a cast iron monument down 1.5'.
- 2003 Westwood Professional Services, Inc. located a cast iron monument using GPS. Corner is 330 feet, +/-, east of TH 10. MN/DOT alignment and right of way map has no information on this corner.  
 County Coordinates Obtained by GPS (Cast Iron Monument)  
 NAD 83 (1996 Adjustment)  
 N-190882.004  
 E-443418.171
- 2008 Westwood Professional Services, Inc. found a CIM at the corner location. CIM fits longstanding occupation along the north/south quarter line of Section 12. CIM is accepted as marking the obliterated corner position. County Coordinates Obtained by GPS coincide with 2003 position.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH 1/4 Corner of Section 12, Township 38N, Range 32W, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 17 OCT. 1988 found a 1" IRON PIPE  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 17 OCT. 1988 placed a CAST IRON MONUMENT OVER 1" IRON PIPE  
DATE

## SKETCH OF REFERENCE TIES

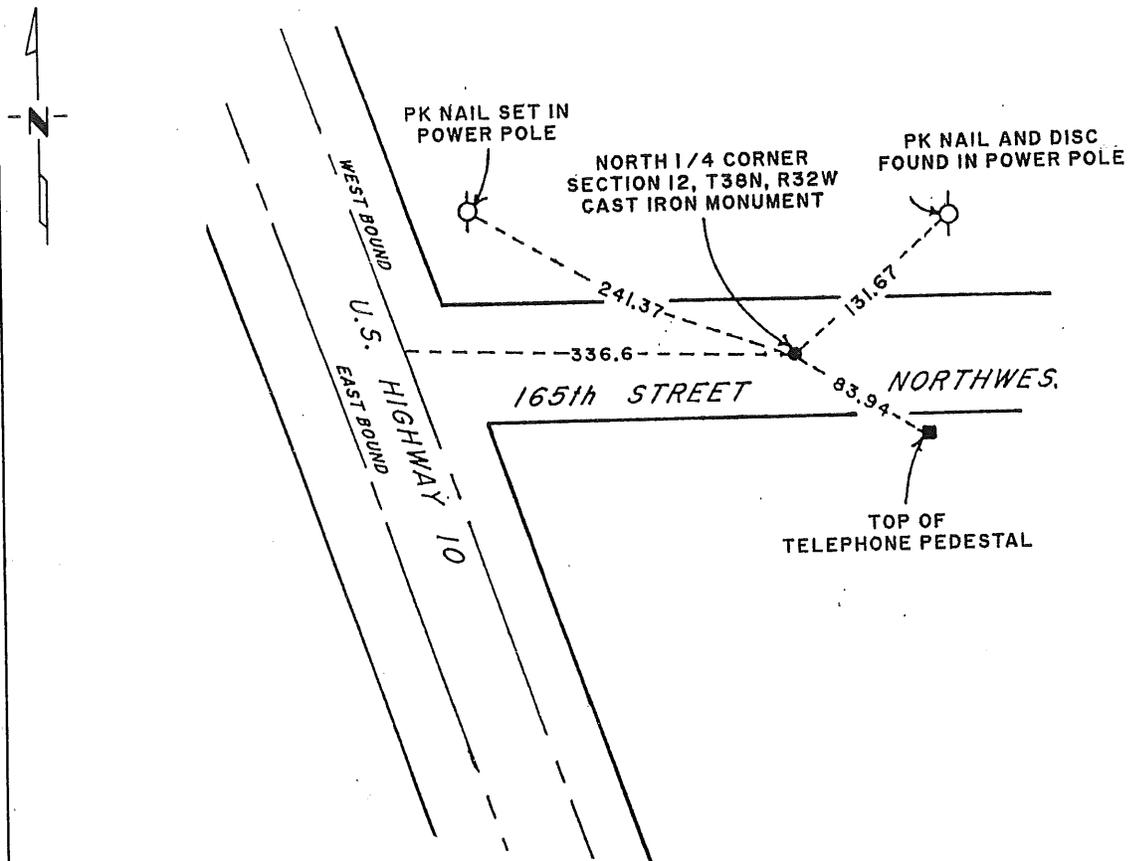

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Benn W. Shenton 12-20-88  
SIGNATURE DATE

Registration No. 17768

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

NORTH QUARTER CORNER, SECTION 12, T38N, R32W, 4TH P.M.

1. The original survey was accomplished in June of 1852 by Edwin James Jr.
2. The old county surveyor's books, in Benton County, provided no information for relocation of said corner.
3. On October 17, 1988, Paul E. Wellen & Associates Inc., located a 1" iron pipe, marking said corner and set a cast iron monument over said iron pipe and updated reference ties.

191343

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JAN 20 9 19 AM '89

ALICE C. ENGELBOMER  
COUNTY RECORDER

BY ce DEPUTY

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North 1/4 Corner of Section 12, Township 38, Range 32, \_\_\_\_\_ P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

## SKETCH OF REFERENCE TIES



Filed under South 1/4 Corner Section 1, T 38 R 32

Certificate # 151876

March 1979

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

\_\_\_\_\_  
SIGNATURE DATE

Registration No. \_\_\_\_\_

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Should BE NORTH 1/4 Corner Section 12, T38 R32 Index No. \_\_\_\_\_

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

~~at the South 1/4~~ Corner of Section 1, Township 38, Range 32, 4 P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 2-28-78 found a 1/2" iron pipe, on center line of East-West Temp road, on a tree line to the South  
DATE
  - left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a 1/2" iron pipe  
DATE

## SKETCH OF REFERENCE TIES



Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul E. Kellen \_\_\_\_\_  
SIGNATURE DATE

Registration No. 10461

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

County Recorder  
OFFICE OF THE REGISTER OF DEEDS  
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 10 4 A.M. on the 26th day of March A.D., 1977

Register of Deeds T.G. Johnson  
By \_\_\_\_\_, Deputy


DOCUMENT NO. 151876

Should BE North 1/4 corner Section 12, T38 R32

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 28 day of February, 1978  
I did set the South corner of Section 1,  
Twp. 38, Rg. 32, Benton County, Minnesota, which  
was evidenced by a 1/2" iron pipe, on center line of East-West township  
road, on a tree line to the South.

I further certify that in order to perpetuate said corner I did  
at the exact location thereof place a permanent marker consisting  
of a 1/2" iron pipe and that  
I did establish witness or reference monuments as shown below:

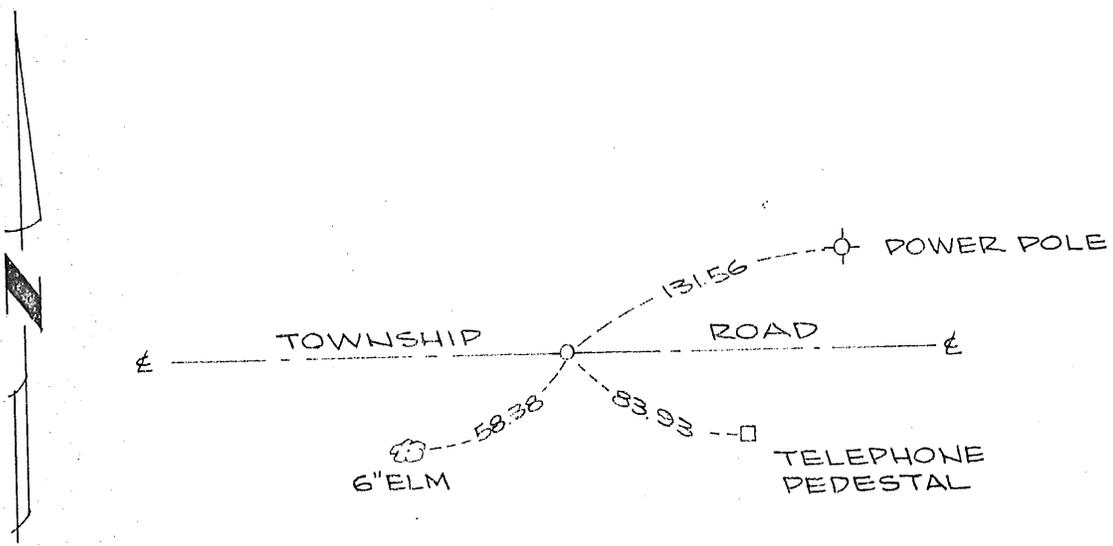

**151876**

I hereby certify that the above  
is true and correct and that I am  
a registered Land Surveyor under  
the laws of the State of Minnesota.

Judy Nelson

Minn. Registration No. 10461

Office of the County Recorder,  
Benton County, Minn.

I hereby certify that the within instrument  
was filed for record in this office on the  
26th day of March, 1979,  
at 10 a.m.

F.A. Johnson  
County Recorder

By \_\_\_\_\_ Deputy.