

Certified, Filed and or Recorded on  
Sep. 23, 2008 AT 01:35PM



Signed: BW  
MARILYN J NOVAK G V  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 12, Township 38, Range 32  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 8-13-08 found a CAST IRON MON
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

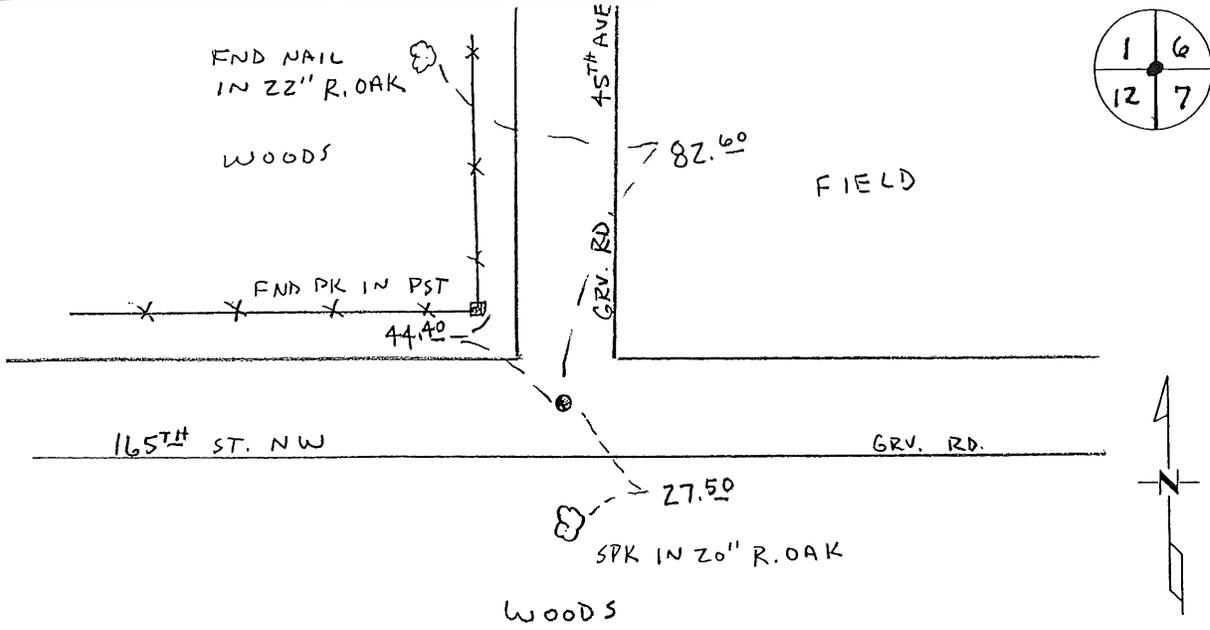

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]  
Deputy County Surveyor  
License No. 43932

Date: 8/29/08

Benton County Surveyor's Office  
 Chris Hoglund, Deputy County Surveyor  
 Minnesota License No. 43932

**Statement of Evidence:**

**E122**

The Northeast Corner of Section 12, Township 38 North, Range 32 West, West Langola Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office surveyor, Theodore Conkey, set a wood post at this location and bearing trees were recorded.

8" Bur Oak	N 47 1/2 E	80 links
6" Blk Oak	N 62 1/2 W	20 links
8" Blk Oak	S 45 1/2 W	49 links
8" Bur Oak	S 66 E	49 links

1941 County Surveyor's Record Book 2, page 98 contains a survey by HG Elleston of Section 7, 38-31. Survey shows this corner but does not give any information about a monument.

1978 Paul Wellen's, LS 10461, notes, per Book 11, page 32, a distance of 2745.64 feet to the North 1/4 corner Sec. 12 and a distance of 2809.47 feet to the East 1/4 corner Sec. 12.

1982 Paul Wellen notes, per Wellen's Book 31, page 40, a distance of 2687.36 feet to the East 1/4 corner Sec. 1.

1988 Bruce Skipton, LS 17768, found a 1/2" pipe. He set a cast iron monument and filed a Certificate of Location (#191236).

2003 Westwood Professional Services, Inc. located a cast iron monument using GPS. County Coordinates Obtained by GPS (Cast Iron Monument)  
 NAD 83 (1996 Adjustment)  
 N-190896.497  
 E-446163.803

2008 Westwood Professional Services, Inc. located a cast iron monument. County Surveyor's Record Book 2, page 98 contains a survey by HG Elleston of Section 7- 38-31. Survey gives a distance of 5369.0 feet for the west line of Section 7. Westwood finds CIM to measure 5369.33 feet north of the SE corner and accepts CIM as marking the obliterated position.  
 County Coordinates Obtained by GPS (Cast Iron Monument)  
 NAD 83 (1996 Adjustment)  
 N-190896.497  
 E-446163.803

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N. E. \_\_\_\_\_ Corner of Section 12, Township 38, Range 32, \_\_\_\_\_ P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

## SKETCH OF REFERENCE TIES



Filed under S.E. Corner Section 1, T 38 R 32

Certificate # 151877

March 1979

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

\_\_\_\_\_  
SIGNATURE DATE

Registration No. \_\_\_\_\_

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

## OFFICE OF THE REGISTER OF DEEDS

County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 12, Township 38N, Range 32W, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 7-14-88 found a 1/2" IRON PIPE  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 10-17-88 placed a Cast Iron Monument  
DATE

## SKETCH OF REFERENCE TIES

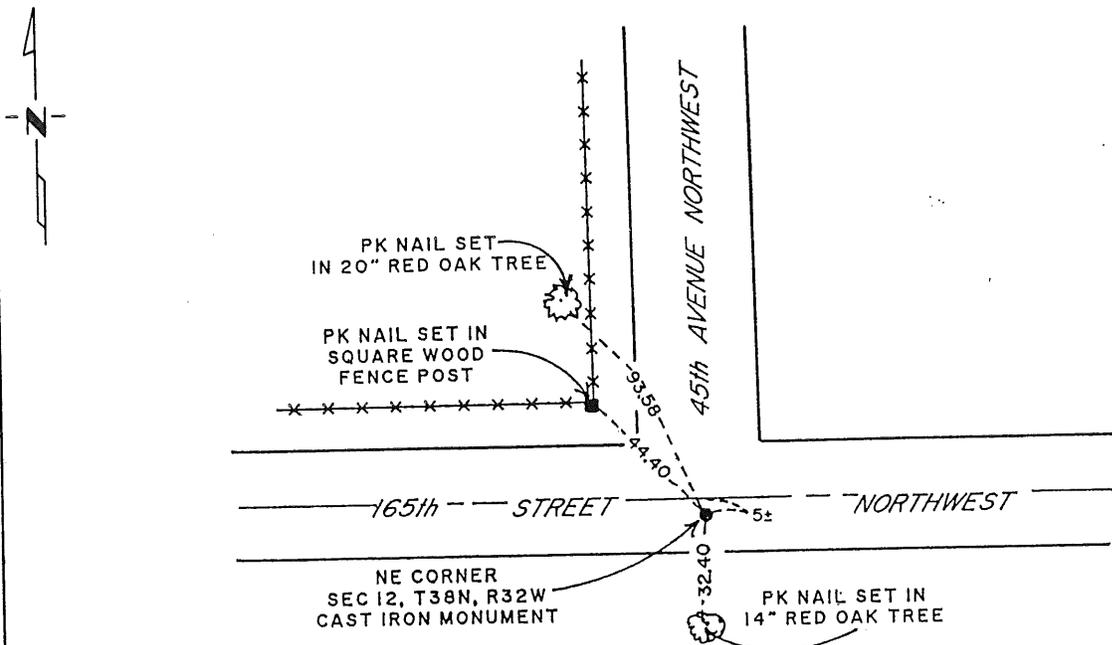

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Johnston 12-14-88  
SIGNATURE DATE

Registration No. 17768

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

NORTHEAST CORNER, SECTION 12, T38N, R32W, 4TH P.M.

1. The original survey was accomplished in August 1849, by Theodore Conkey, a U.S. Deputy Surveyor.
2. The old Benton County Surveyor's books provided no information for relocation of said corner.
3. On February 28, 1978, Paul E. Wellen & Associates Inc., found a 1/2" iron pipe marking the position of said corner.
4. On July 14, 1988, Paul E. Wellen & Associates located the iron pipe that was found in February 1978 and set a cast iron monument over the iron pipe and made new reference ties as indicated.

191236

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MO  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JAN 12 11 56 AM '89

ALICE G. ENGLISH  
COUNTY RECORDER

BY *Jan* DEPUTY

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I did set the ~~south east~~ Corner of Section 1, Township 38, Range 32, 4 P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 2-28-1978 found a 1/2" iron pipe, on center line of East-West Imp. road, on center line of north township road  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a 1/2" iron pipe  
DATE

### SKETCH OF REFERENCE TIES



*Refer to next page*

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul E. Keenan  
SIGNATURE DATE

Registration No. 10461

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

*County Recorder*  
OFFICE OF THE REGISTER OF DEEDS  
County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at 10 a.m. on the 26 day of March A.D., 19 77


Register of Deeds F. E. Johnson  
By \_\_\_\_\_, Deputy

DOCUMENT NO. 151877

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 28 day of February, 1978  
I did set the southeast corner of Section 1,  
Twp. 38, Rg. 32, Benton County, Minnesota, which  
was evidenced by a 1/2" iron pipe, on center line of East-West township  
road, and on center line of North township road.

I further certify that in order to perpetuate said corner I did  
at the exact location thereof place a permanent marker consisting  
of a 1/2" iron pipe and that  
I did establish witness or reference monuments as shown below:

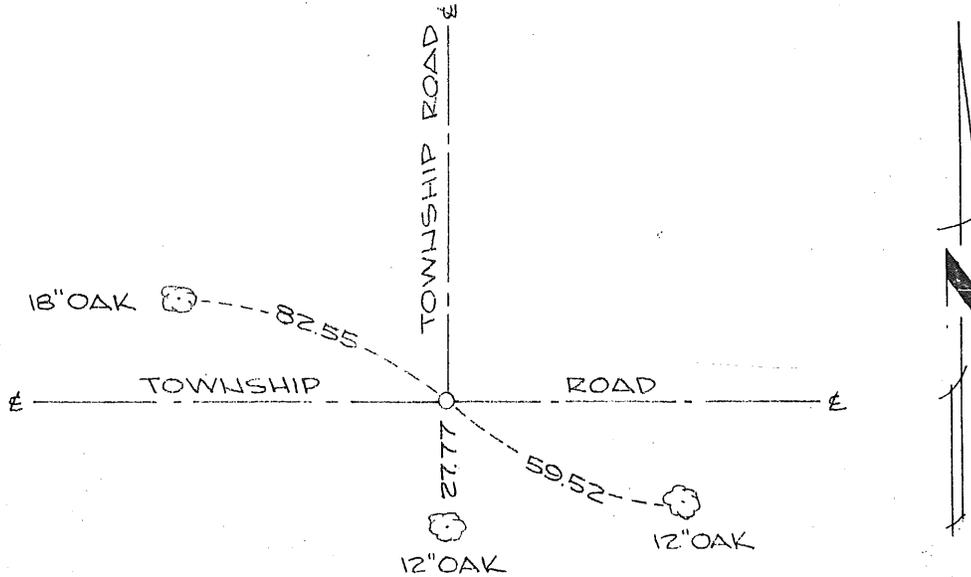

151877

I hereby certify that the above is true and correct and that I am a registered Land Surveyor under the laws of the State of Minnesota.

Paul Miller

Minn. Registration No. 10461

Office of the County Recorder,  
Benton County, Minn.

I hereby certify that the within instrument was filed for record in this office on the 26th day of March, 1979 at 10 A.M.

F. G. Johnson  
County Recorder

By \_\_\_\_\_ Deputy.