

Certified, Filed and or Recorded on
Sep. 23, 2008 AT 01:36PM


Signed: BW
MARILYN J NOVAK G V A
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 13, Township 38, Range 32
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 8-13-08 found a CAST IRON MON.
- left monument as found lowered monument removed monument (explain)
- On _____ placed on _____

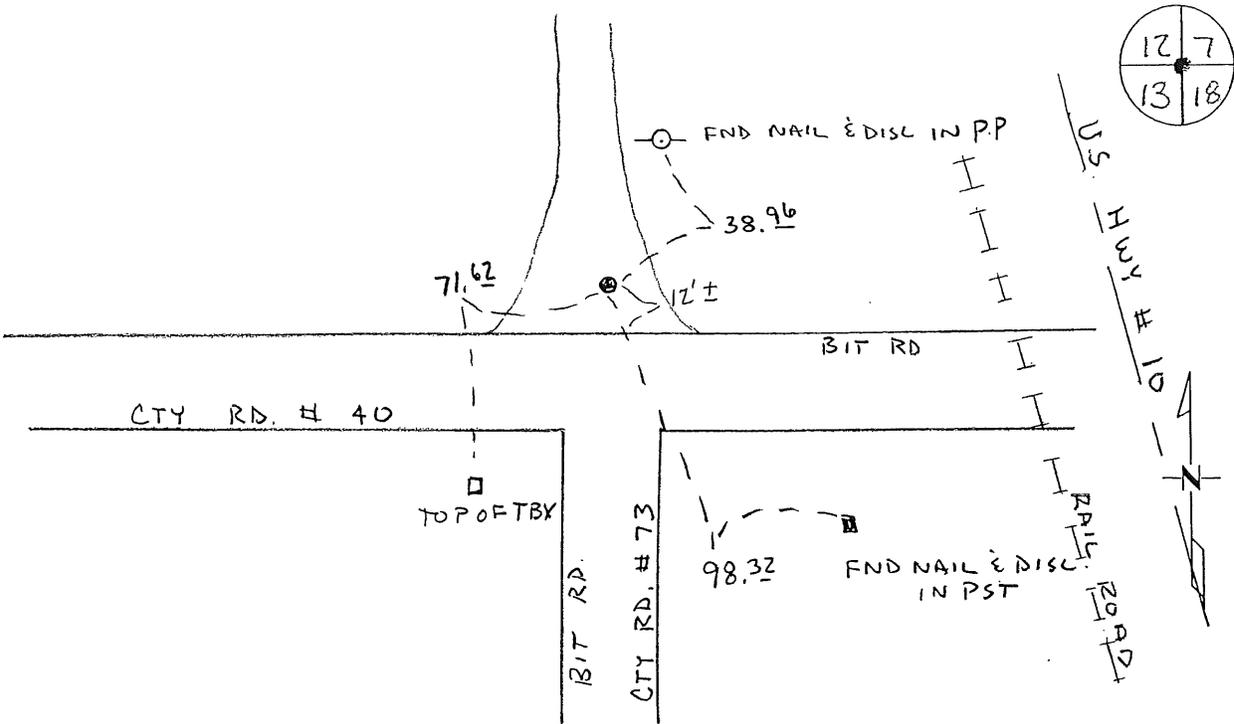

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 8/29/08

Benton County Surveyor's Office
Chris Hogle, Deputy County Surveyor
Minnesota License No. 43932

Statement of Evidence:

E132

Northeast Corner of Section 13, Township 38 North, Range 32 West, West Langola Township, 4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office surveyor, Theodore Conkey, set a wood post in a mound for the corner location and notes a pit 6 links north.
- 1941 County Surveyor's Record Book 2, page 98 contains a survey by HG Elleston of Section 7, 38-31. Survey shows this corner but does not give any information about a monument.
- 1946 Minnesota Highway Department notes on Roll E-1, File No. 33-10, S.P. 0505 (TH 10:27) the corner is at the intersection of roads south/east/west.
- 1988 Bruce Skipton, LS 17768, set a cast iron monument at the intersection of a west/east/south road after digging with a backhoe and finding nothing. A Certificate of Location (#191342) was filed.
- 2002 Westwood Professional Services, Inc. found a cast iron monument.
County Coordinates obtained by GPS (Cast Iron Monument)
NAD 83 (1996 Adjustment)
N-185530.220
E-446344.829
- 2004 MN/DOT
County Coordinates obtained by GPS
NAD 83 (1996 Adjustment)
N-185530.202
E-446344.825
- 2008 Westwood Professional Services, Inc. found a cast iron monument and verified 2002 coordinates.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 13, Township 38 N, Range 32 W, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 18 AUGUST 1988 placed a CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

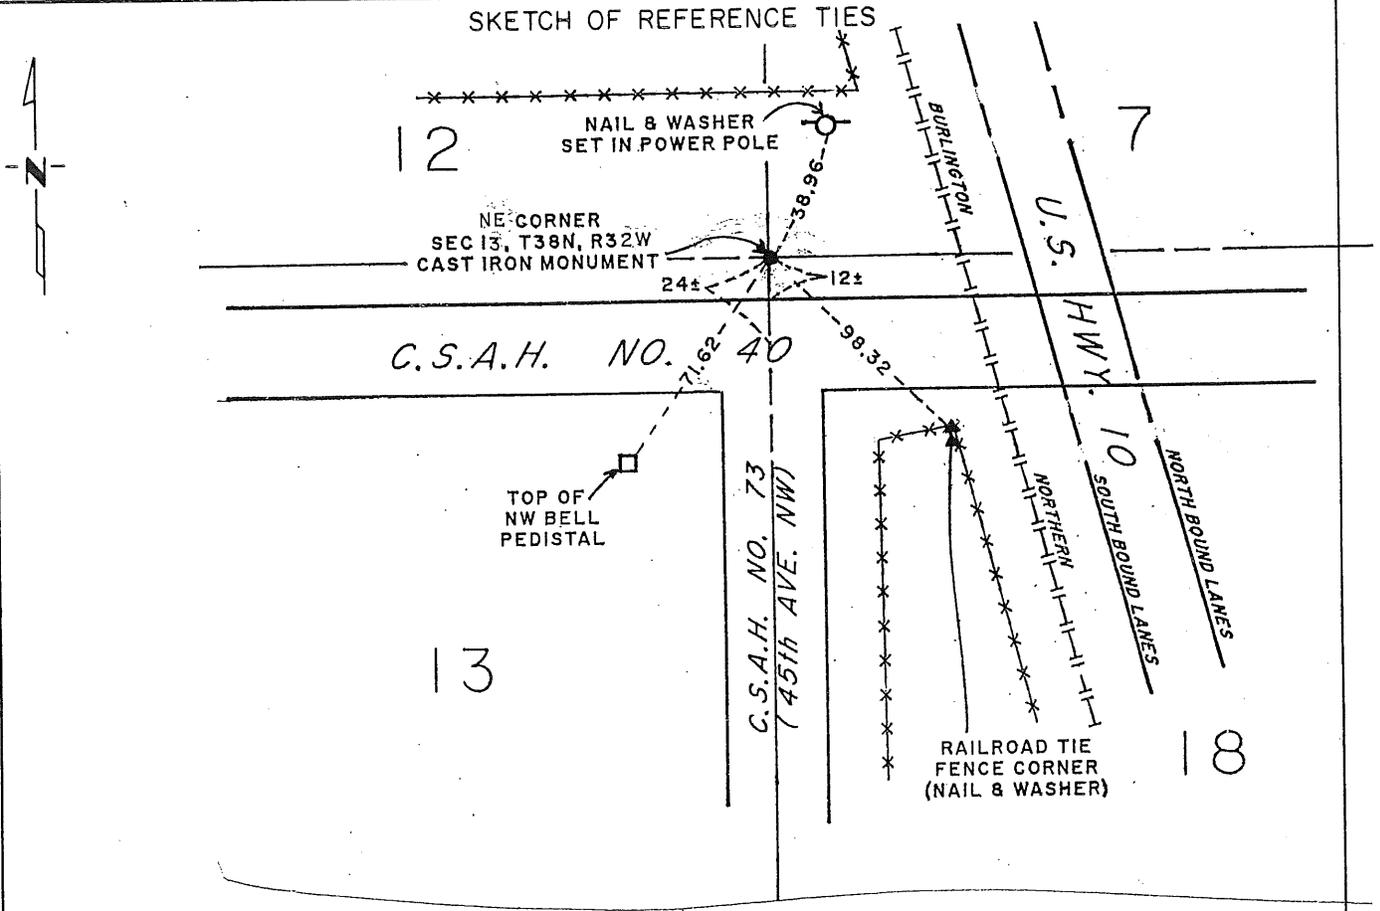

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Shipton SIGNATURE 12-29-88 DATE

Registration No. 17768

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

NORTHEAST CORNER, SECTION 13, T38N, R32W, 4TH P.M

1. During the G.L.O. Survey of 1849, Theodore Conkey, U.S. Deputy Surveyor set a wood post to mark this corner.
2. Benton County's old surveyor's books provided no information to relocate said corner.
3. On August 18, 1988, Paul E. Wellen & Associates Inc., dug with a backhoe at the intersection of the centerline of the roads west, east and south, and found nothing. We set a cast iron monument at this location to mark said corner and established reference ties as indicated.

191342

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 20 9 18 AM '89

ALICE S. ENDELMAYER
COUNTY RECORDER

BY Ob DEPUTY