

Statement of Evidence:

The East Quarter Corner of Section 6, Township 37 North, Range 28 West, Maywood Township, 4th Principal Meridian, Benton County, Minnesota.

In July of 1855, Oscar F. Davis a wood post was set at this location and bearing trees were recorded.

9" Elm	S 22 W	16 links
6" Elm	N 30 1/2 E	14 links

In 1956, notes indicate the corner has the following reference ties.

F.P.	W	30.4
T.P.	E	32.1

On fence line east and west

The County Surveyors records in Book 2, page 396 show a hub with the following reference ties.

T.P.	E	32.55
Cor F.P.	W	30.45

On November 18, 1985 Benton County records indicate an iron pin in place at the corner location.

On December 26, 1995 William Lunser searched for the corner and found no existing ties. A search with a metal detector revealed a marker well below the surface. A retracement of a survey by Ronald Engelmeyer, R.L.S 13334, confirmed the location. Mr. Lunser set a 1" iron pipe at the location and established reference ties. A Certificate of Location (#234177) was filed.

On September 9, 2000 Westwood Professional Services, Inc. found a 1/2" iron pipe at centerline.

On October 22, 2001 Westwood Professional Services, Inc. found a 1/2" iron pipe over a 3/4" iron pipe at the intersection of the centerlines of County Road 6 (running north and south) and a tree line (running east and west). Removed both and set a cast iron monument and established reference ties.

MARILYN J. HOVAK
COUNTY RECORDER
BY *Marilyn J. Hovak*
DEPUTY

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

291187


2002 OCT 30 P 3:23

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER corner of Section 6, Township 37, Range 28, 4th P.M.
Benton County, Minnesota.

On Dec 26, 1995, A one inch iron pipe (I.P.) was placed at this location.

SKETCH OF REFERENCE TIES

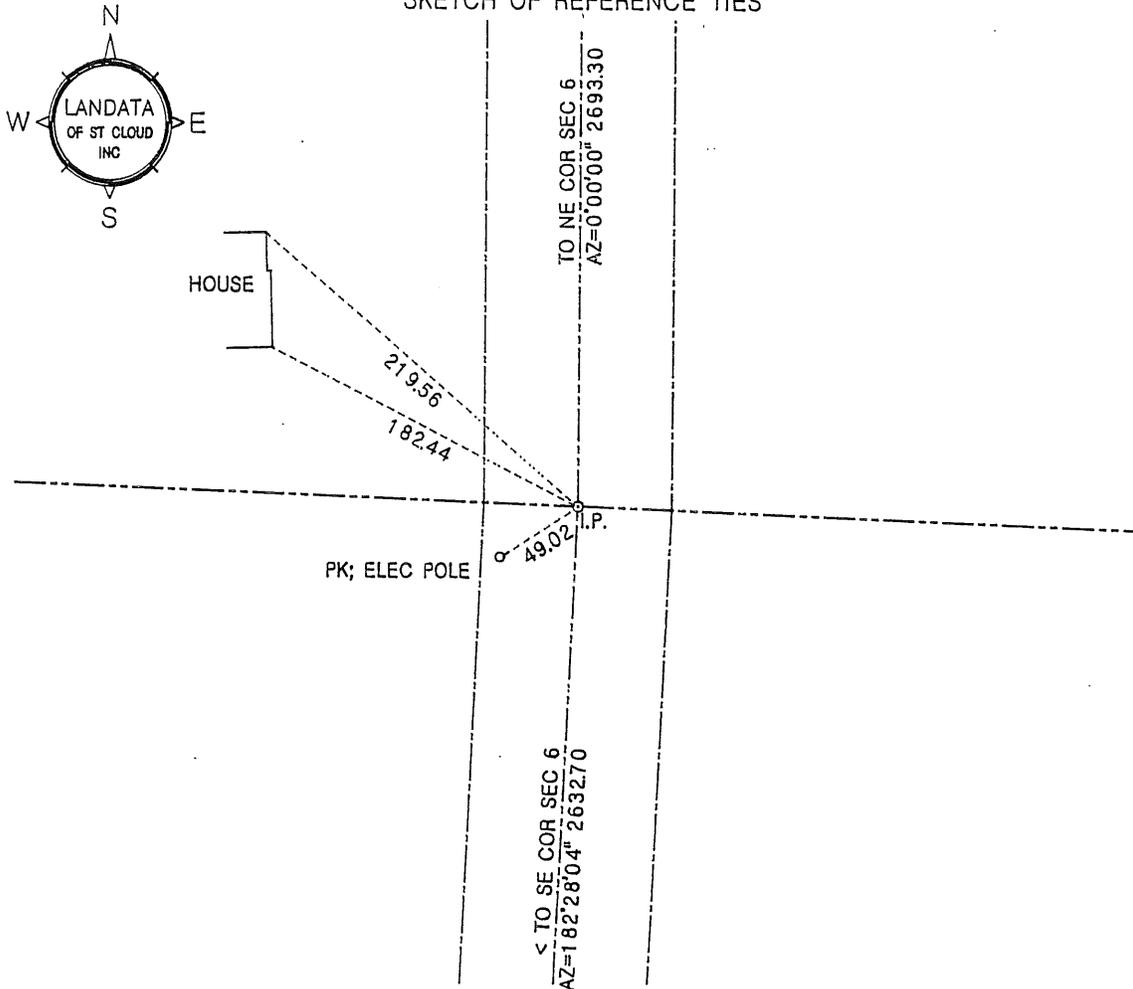

Statement of evidence relative to this corner location on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William F. Lunser 3/13/96
William F. Lunser, L.S. Date
Mn Reg No 9394

FB; 150/24 DISC; 14

OFFICE OF THE COUNTY RECORDER
Benton County, Minnesota

I hereby certify that this document was filed in this office at ___:___:___ M. on the ___ day of _____, 19___.

County Recorder _____

By _____ Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

Records of the Benton County Hwy Dept indicate an iron pin in place at this location on 11/18/85, prior to regrading of C.S.A.H. No. 6.

County reference ties have been destroyed. A search with metal detector revealed the marker well below the surface. A retracement of a survey by Ronald Engelmeyer, R.L.S. 13334, confirmed the location.

The mark conforms to well defined occupation lines consisting of north-south road centerline, tree line west and fence east.

After comparing measured distances to those of the G.L.O. I accepted the Hwy Dept position as the best evidence of the original corner.


William F. Lunser, L.S.

2 3 4 1 7 7

BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

APR 10 2 35 PM '96

ALICE C. ENGELMEYER
COUNTY RECORDER

BY mn DEPUTY km